

SAW Filter 1076.060MHz
Part No: MP01623

Model: TA0839A
Rev No: 3

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance (differential): $Z_S = 150\Omega // 30nH$
2. Terminating load impedance (differential): $Z_L = 150\Omega // 30 nH$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1076.06	-	-
Bandwidth at -2dB	MHz	40	52	-	-
Insertion Loss in 1056.06 ~ 1096.06MHz	dB	-	3.1	5	-
Amplitude ripple (1056.06MHz ~ 1096.06MHz)	dB	-	0.8	2	-
Phase error (1056.06MHz ~ 1096.06MHz) (3)	deg	-	4.6	6.5	-
I/O VSWR (1056.06MHz ~ 1096.06MHz)		-	2	2.5	-
Attenuation (1)					
50 ~ 994MHz	dB	42	55	-	-
1158.12 ~ 1850MHz	dB	42	48	-	-
1850 ~ 3000MHz	dB	35	51	-	-
3000 ~ 6000MHz	dB	22	26	-	-


Notes:

1. The amplitude reference is insertion loss at Fc.
2. The amplitude ripple is defined as the max. level - min. level over any 30MHz block of the given bandwidth.
3. The phase error is measured over any 30MHz block of the given bandwidth.


SAW Filter 1076.060MHz
Part No: MP01623

Model: TA0839A
Rev No: 3


C. OUTLINE DRAWING:

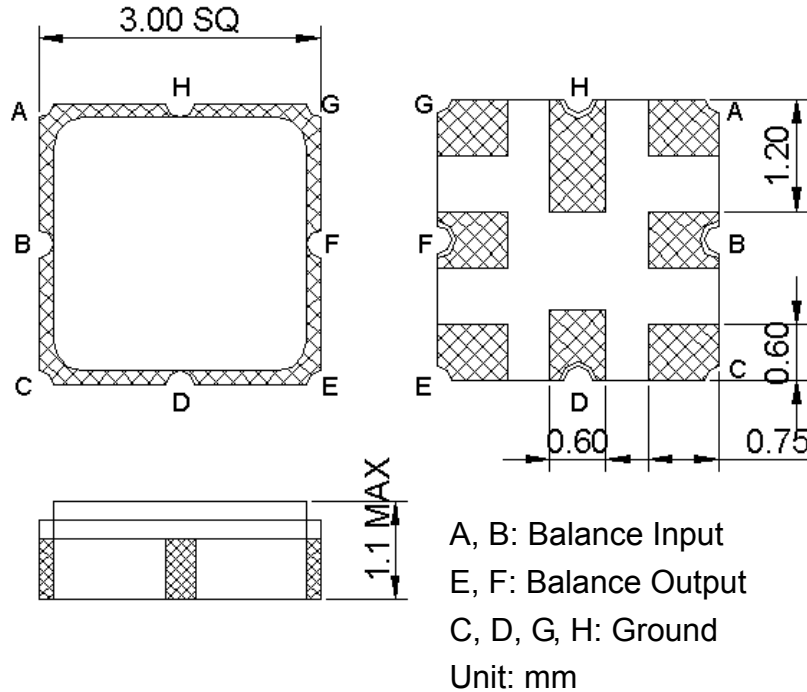

D. MEASUREMENT CIRCUIT:

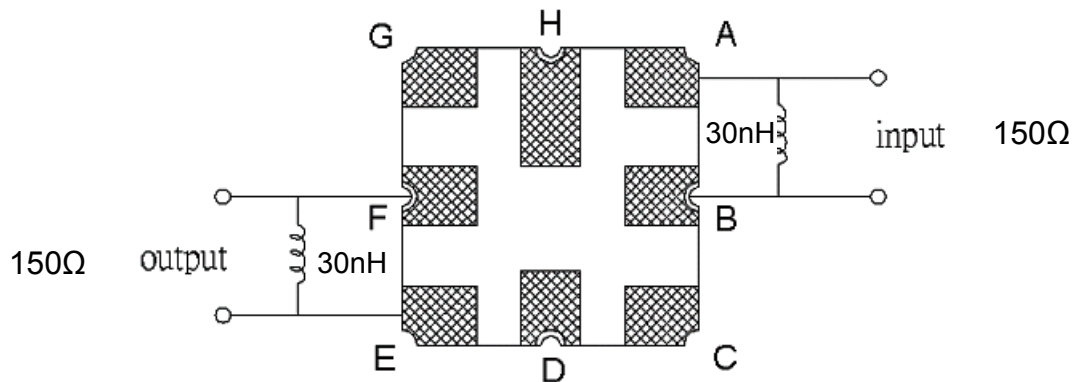



E. PCB FOOTPRINT:

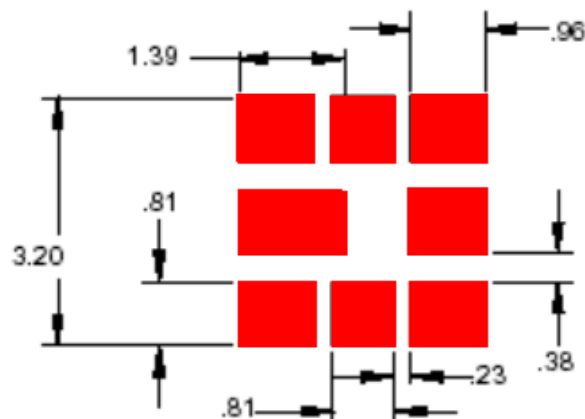

SAW Filter 1076.060MHz
Part No: MP01623


Model: TA0839A
Rev No: 3

F. FREQUENCY CHARACTERISTICS:

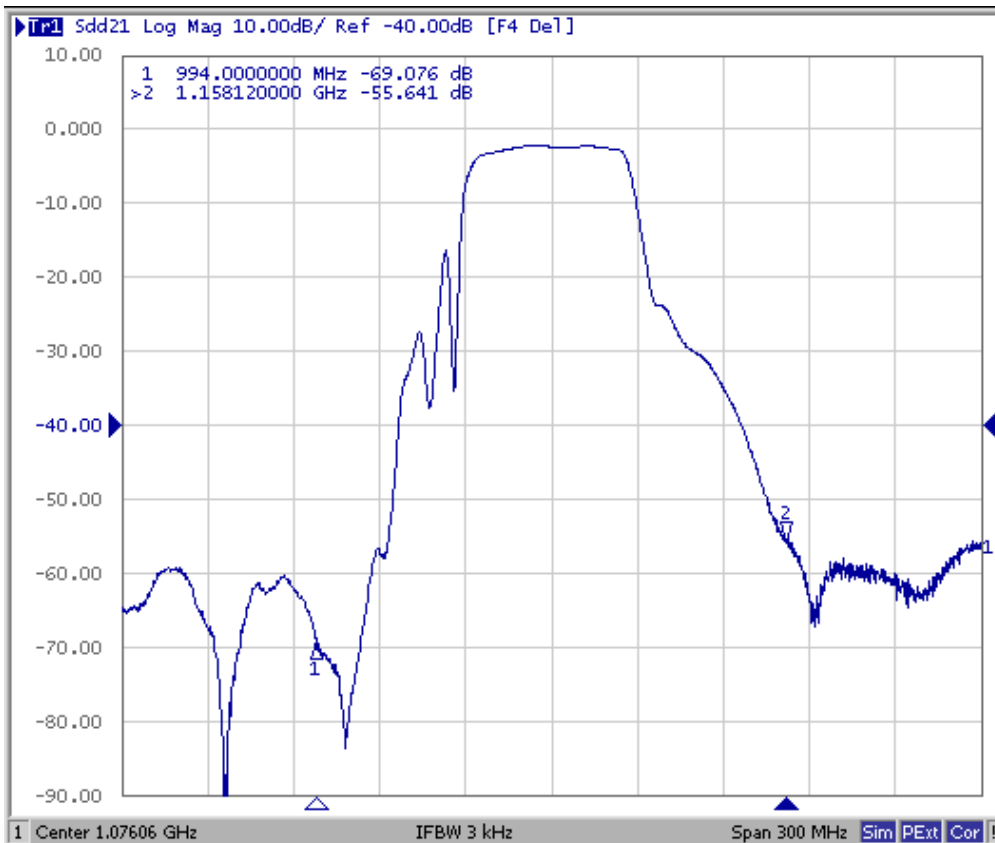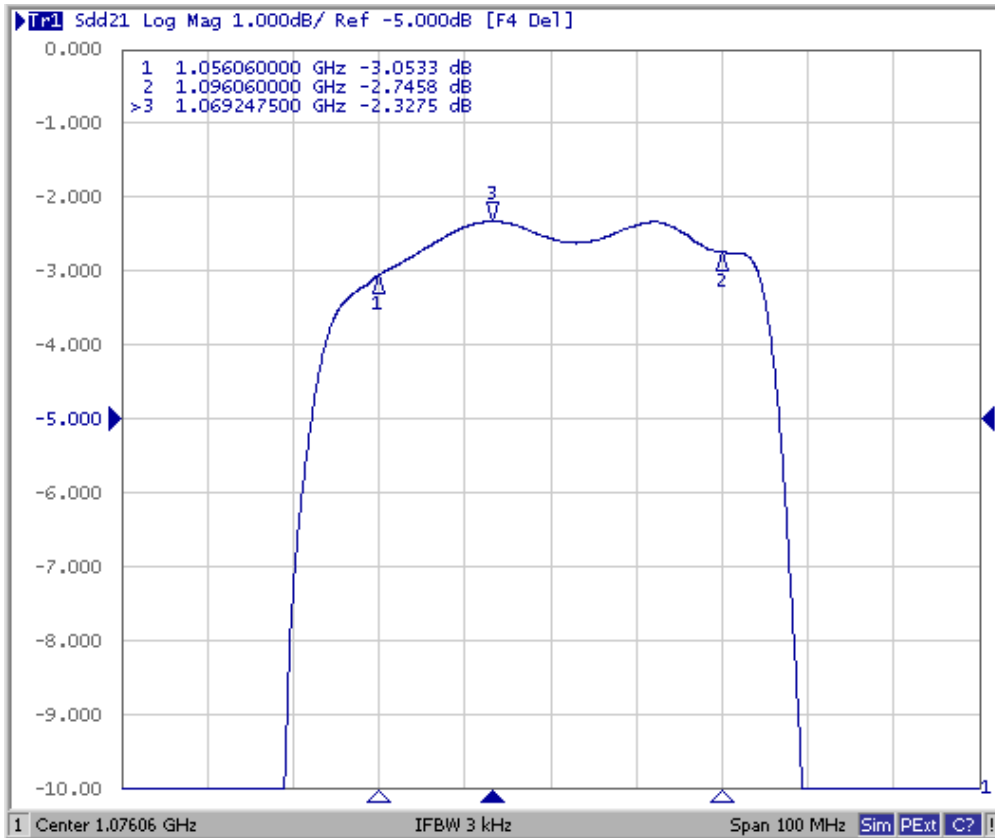

SAW Filter 1076.060MHz
Part No: MP01623



Model: TA0839A
Rev No: 3

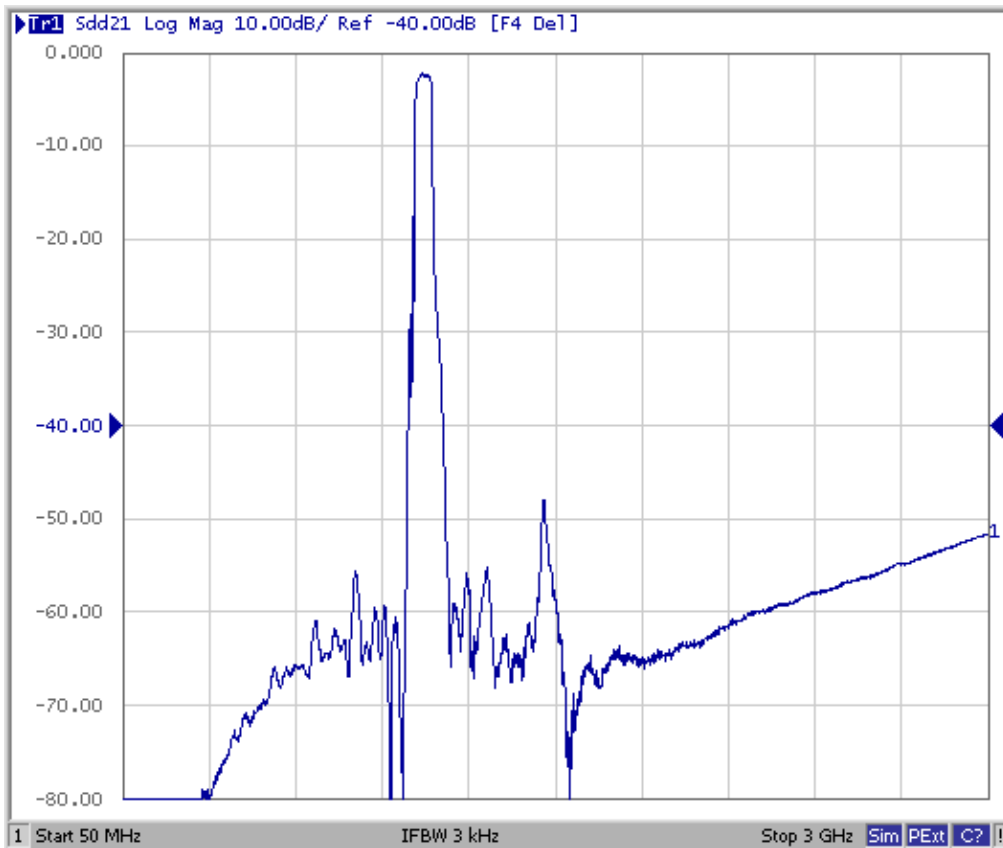

Reflection Functions

S11

S22

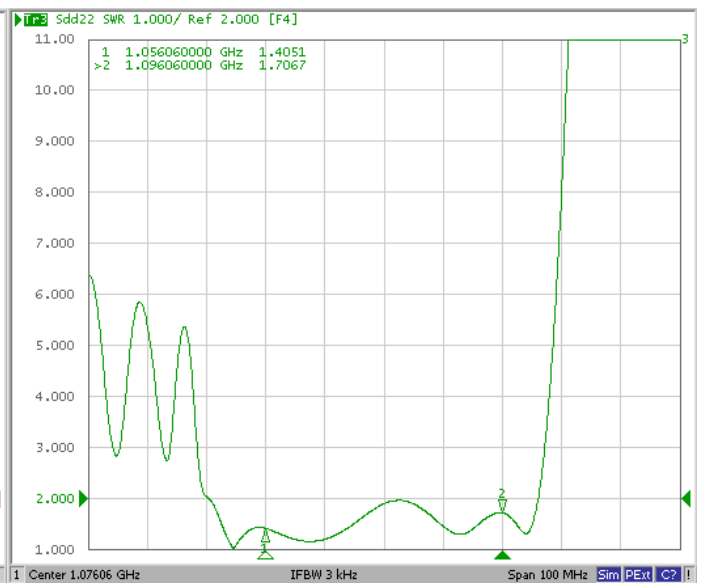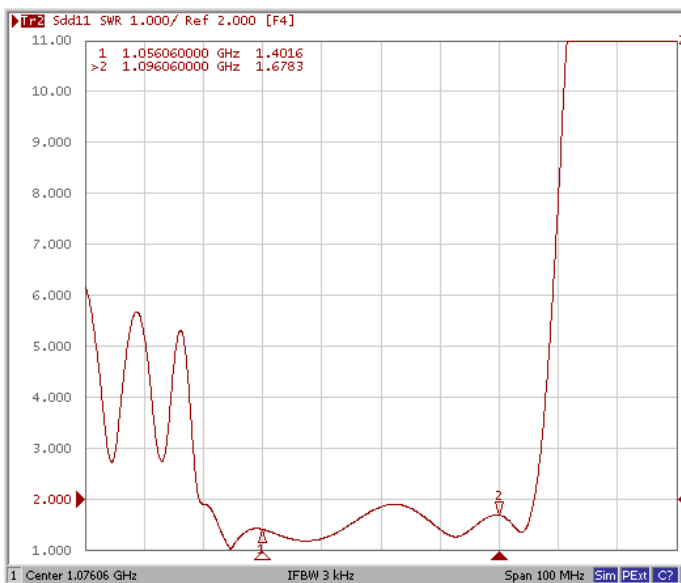

SAW Filter 1076.060MHz
Part No: MP01623

Model: TA0839A
Rev No: 3

H. RECOMMENDED REFLOW PROFILE:

