

SAW Filter 1892.0MHz
Part No: MP06170

Model: TA0737A
Rev No: 1

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -50°C to +95°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance (differential): $Z_S = 150\Omega // 33nH$
2. Terminating load impedance (differential): $Z_L = 150\Omega // 33nH$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1892.54	-	-
Bandwidth at -2dB	MHz	40	68	-	-
Insertion Loss in 1872.54MHz ~ 1912.54MHz	dB	-	2.6	5	-
Amplitude ripple (1872.54MHz ~ 1912.54MHz)	dB	-	0.7	2	-
Phase error (1872.54MHz ~ 1912.54MHz) (3)	deg	-	3.5	5	-
Group Delay ripple (1872.54MHz ~ 1912.54MHz)	ns	-	8	25	-
I/O VSWR (1872.54MHz ~ 1912.54MHz)		-	1.3	2.5	-
Attenuation (1)					
50 ~ 1810.5MHz	dB	44	50	-	-
1974.6 ~ 2000MHz	dB	44	57	-	-
2000 ~ 4250MHz	dB	38	41	-	-
4250 ~ 6000MHz	dB	30	40	-	-


Notes:

1. The amplitude reference is insertion loss at Fc.
2. The amplitude ripple is defined as the max. level - min. level over any 30MHz block of the given bandwidth.
3. The phase error is measured over any 30MHz block of the given bandwidth.


SAW Filter 1892.0MHz
Part No: MP06170

Model: TA0737A
Rev No: 1


C. OUTLINE DRAWING:

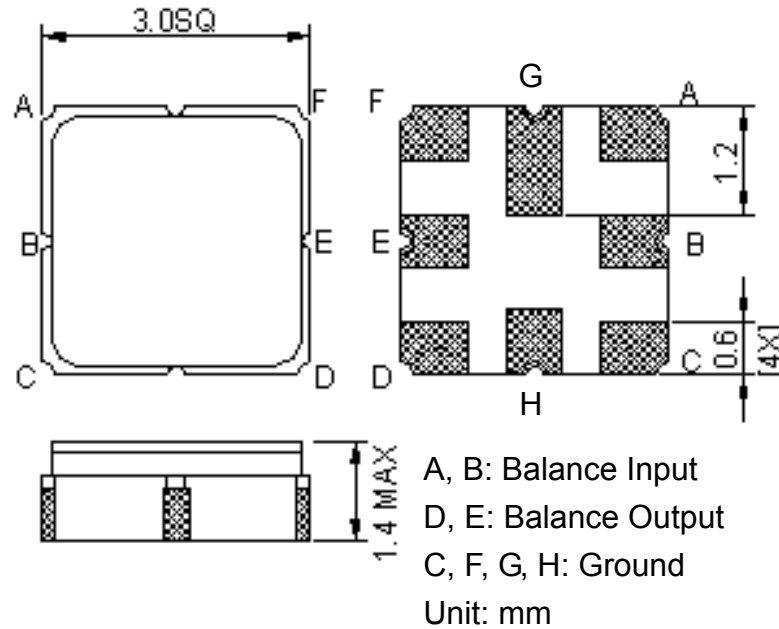

D. MEASUREMENT CIRCUIT:

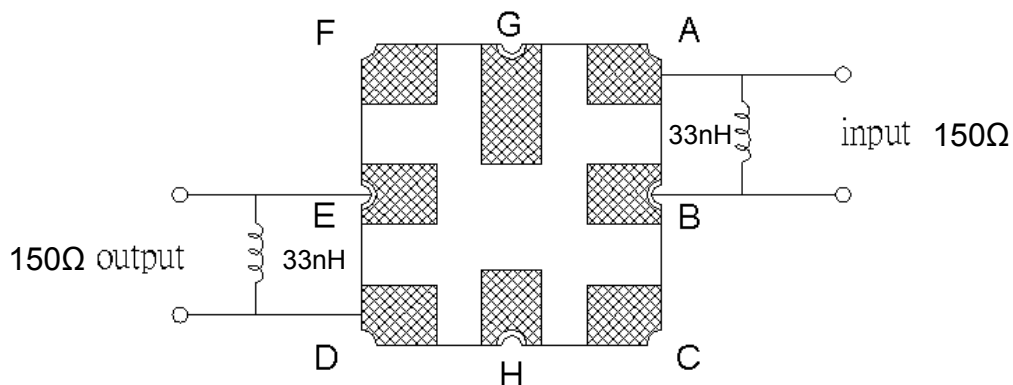



E. PCB FOOTPRINT:

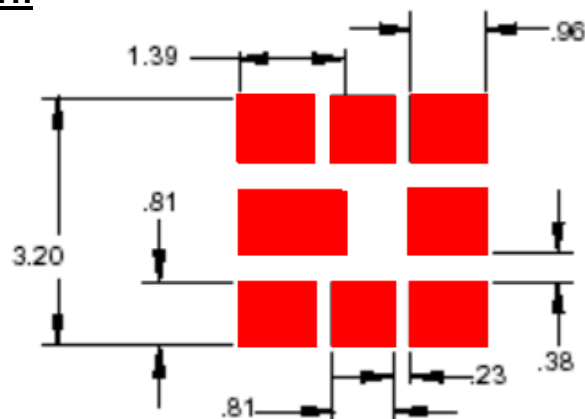

SAW Filter 1892.0MHz
Part No: MP06170


Model: TA0737A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

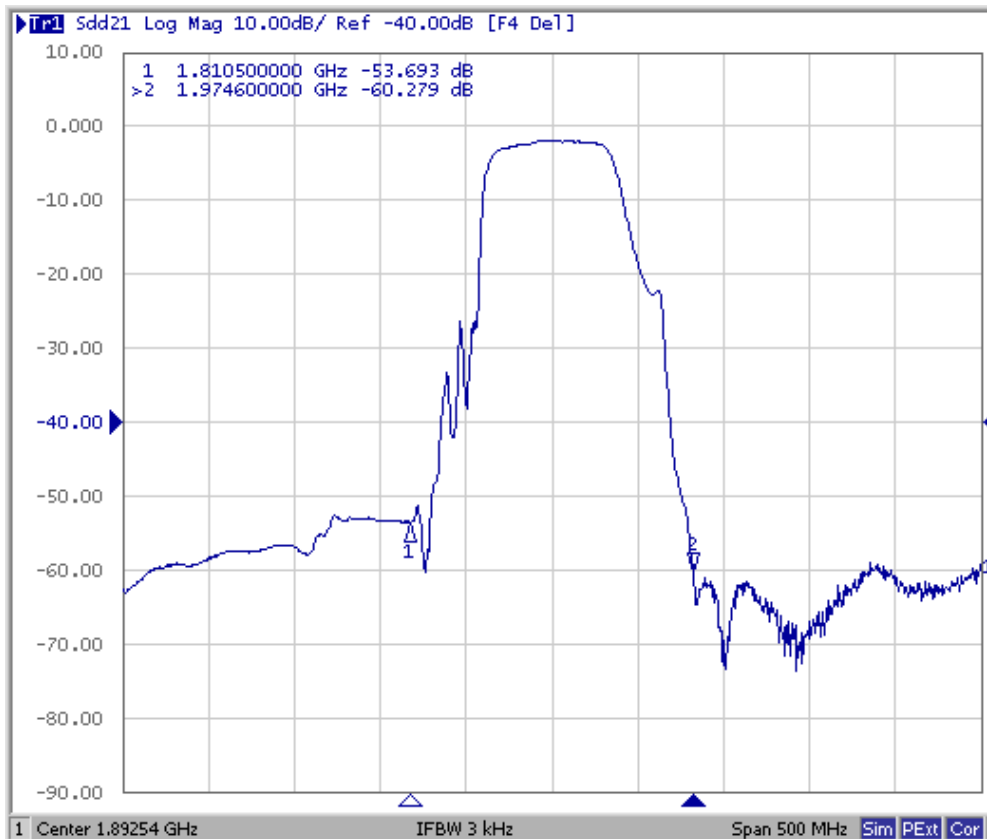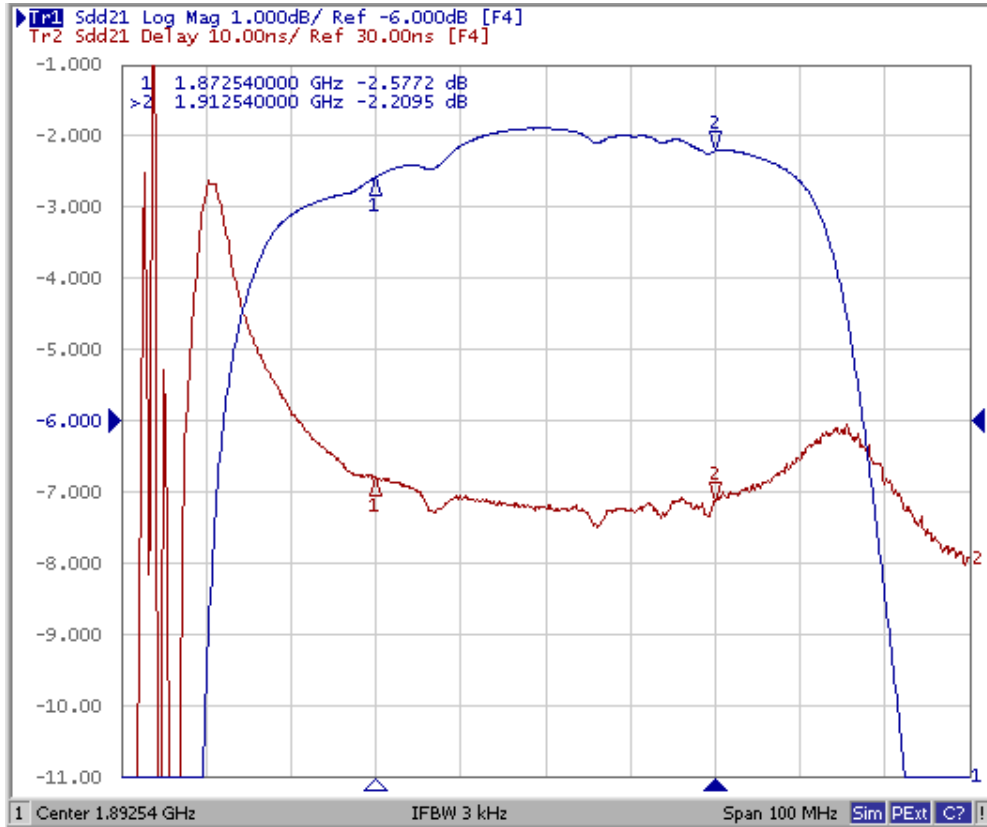

SAW Filter 1892.0MHz
Part No: MP06170

Model: TA0737A
Rev No: 1

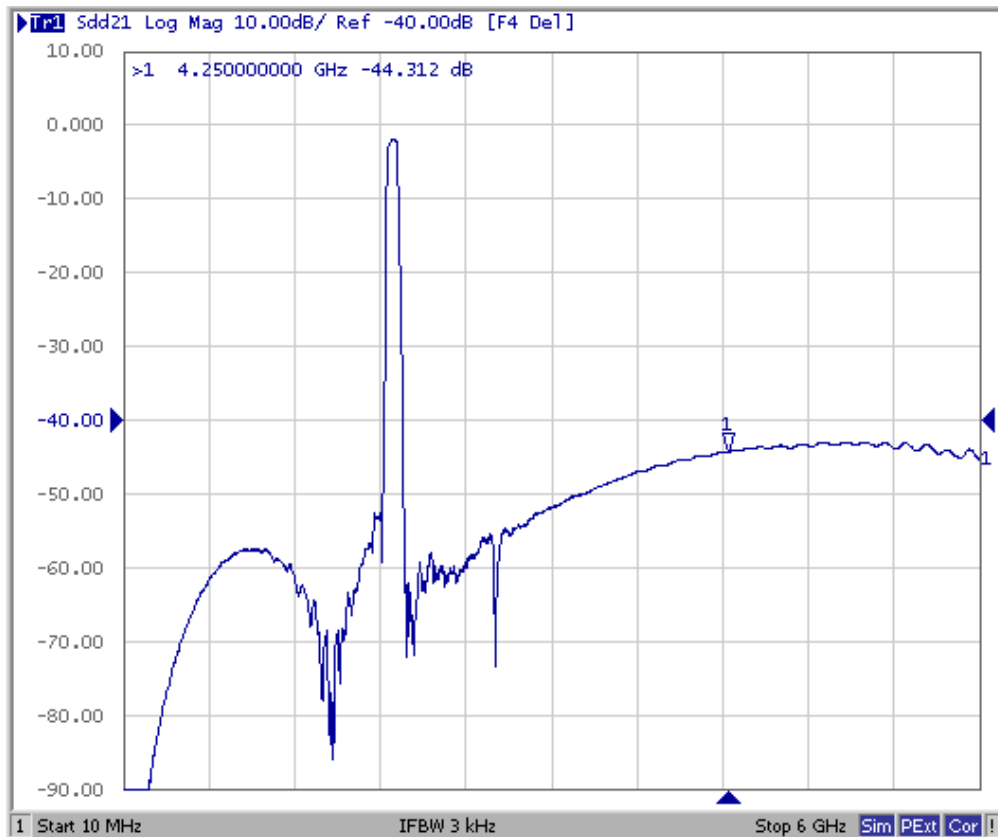


SAW Filter 1892.0MHz
Part No: MP06170


Model: TA0737A
Rev No: 1

Reflection Functions

S11

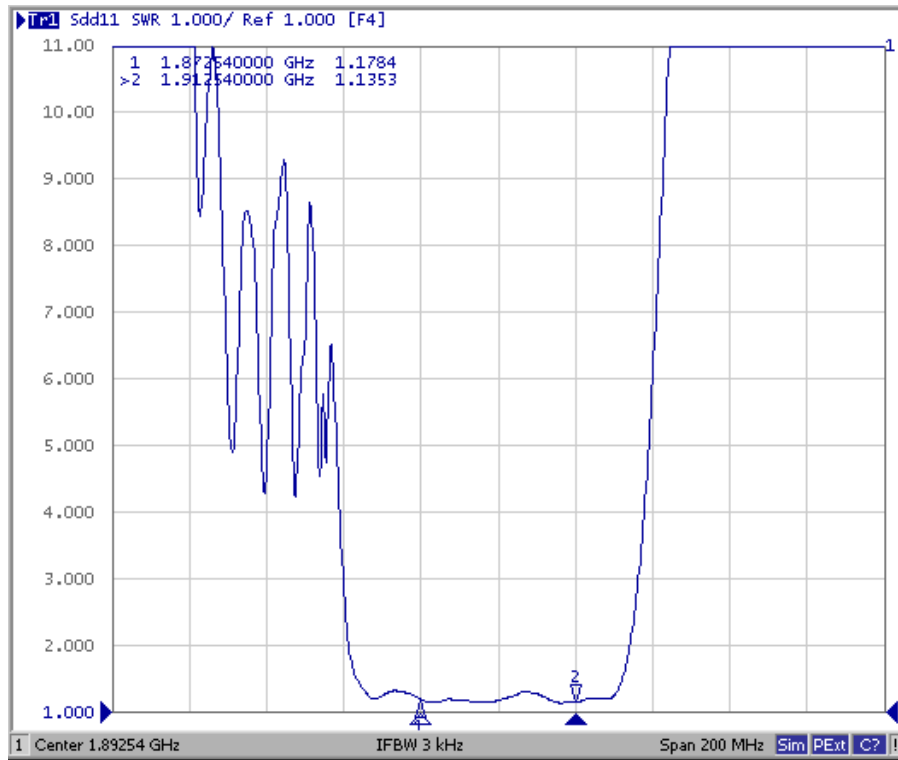

S22

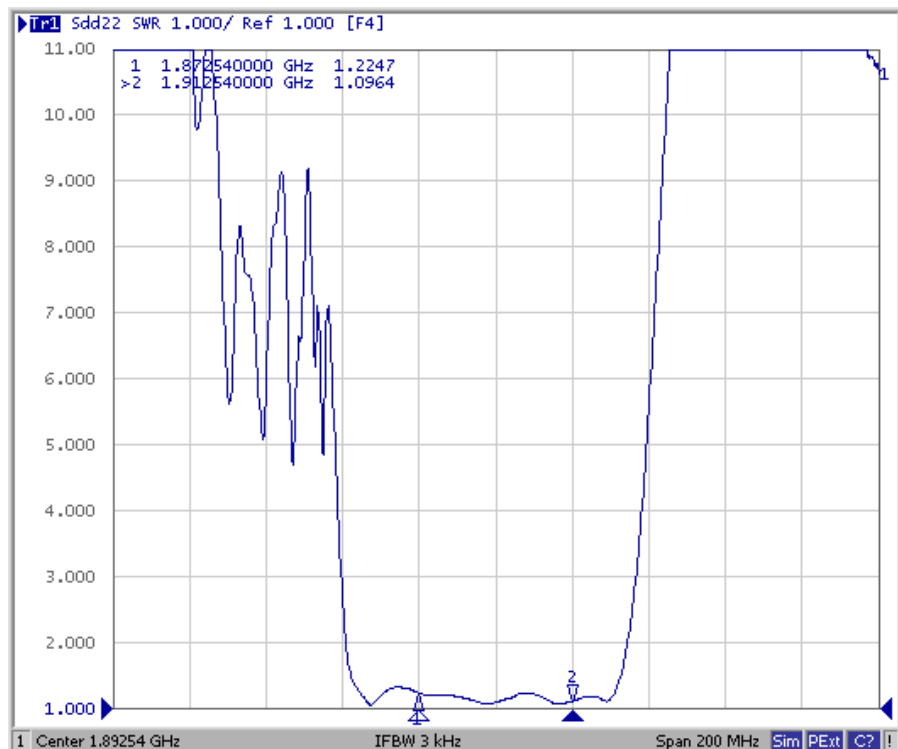


SAW Filter 1892.0MHz
Part No: MP06170


Model: TA0737A
Rev No: 1

G. PACKING:

1. Reel Dimension (Reel Count: 7" = 1000; 13" = 3000)

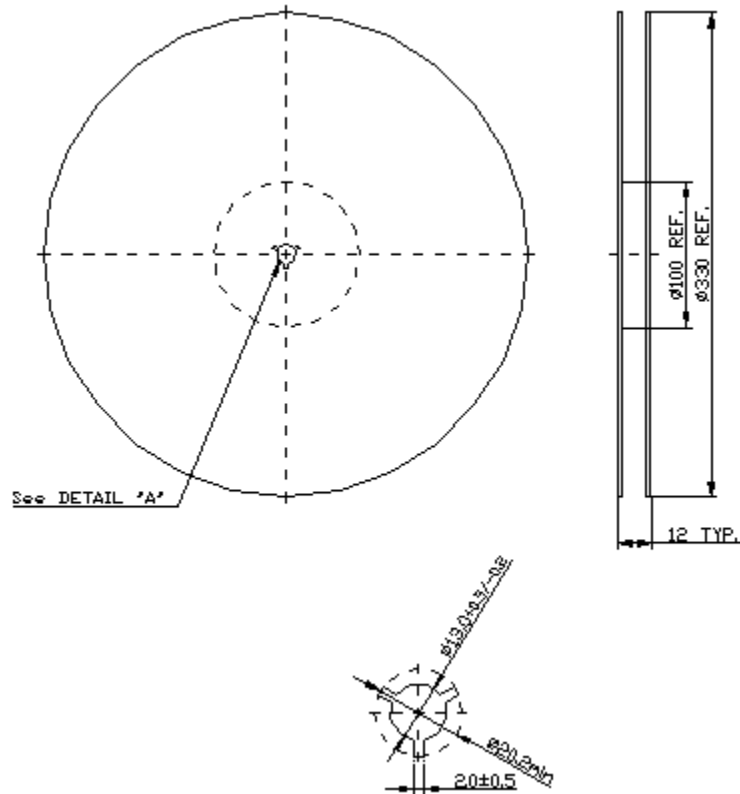

2. Tape Dimension

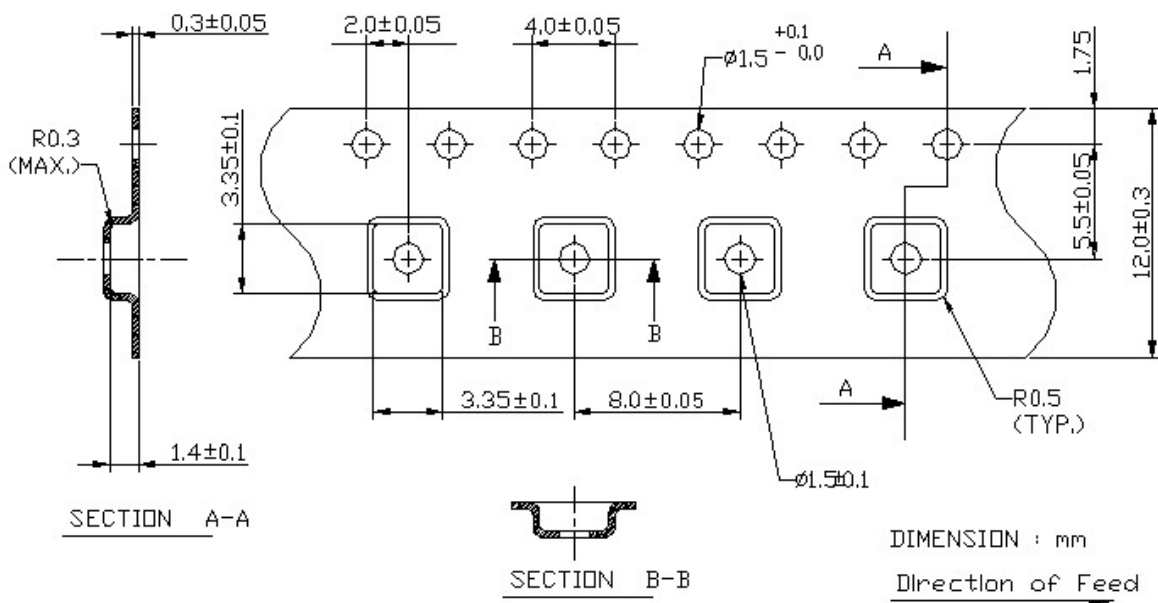

SAW Filter 1892.0MHz
Part No: MP06170

Model: TA0737A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

