

465.0MHz SAW Filter

Model: TB0206A

Part No: MA05709

REV NO.: 2

A. MAXIMUM RATING:


1. Operating Temperature: -0 °C ~ 70 °C
2. Storage Temperature: -40 °C ~ +85 °C

B. ELECTRICAL CHARACTERISTICS:

Ambient Temperature: 25 °C

Characteristics	Value			Note
	Min.	Typ.	Max.	
Center frequency F_C MHz	-	465	-	-
Minimum Insertion loss I.L. dB	-	11.5	14	-
Lower 1 dB Bandedge MHz	-	453.8	456.7	-
Upper 1 dB Bandedge MHz	473.3	475.3	-	-
Passband Ripple (456.7~473.3MHz) dB	-	0.5	1	-
Group Delay Ripple (456.7~473.3MHz) dB	-	38	70	-
Input VSWR (456.7~473.3MHz)	-	1.2	2	-
Output VSWR (456.7~473.3MHz)	-	1.4	2	-
Attenuation:(Reference level from minimum insertion loss)				dB
1) 10 MHz....405 MHz	dB	45	54	-
2) 405 MHz ~ 440 MHz	dB	40	49	-
3) 490 MHz ~ 510 MHz	dB	40	47	-
4) 510 MHz ~ 580 MHz	dB	40	55	-

C. MEASUREMENT CIRCUIT:

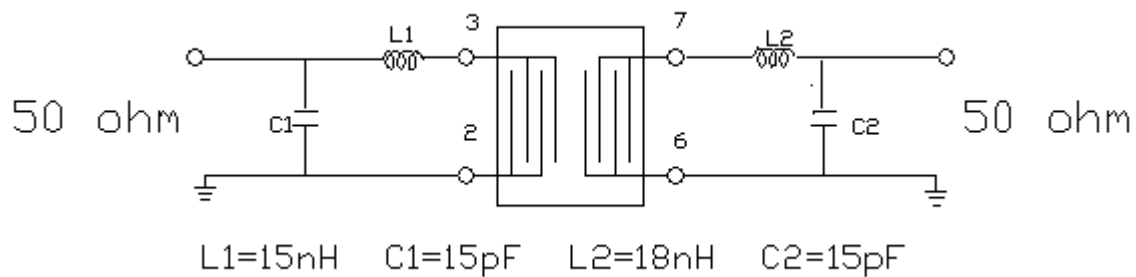

465.0MHz SAW Filter
Part No: MA05709

Model: TB0206A
REV NO.: 2

D. FREQUENCY CHARACTERISTICS:

1. S21 Response

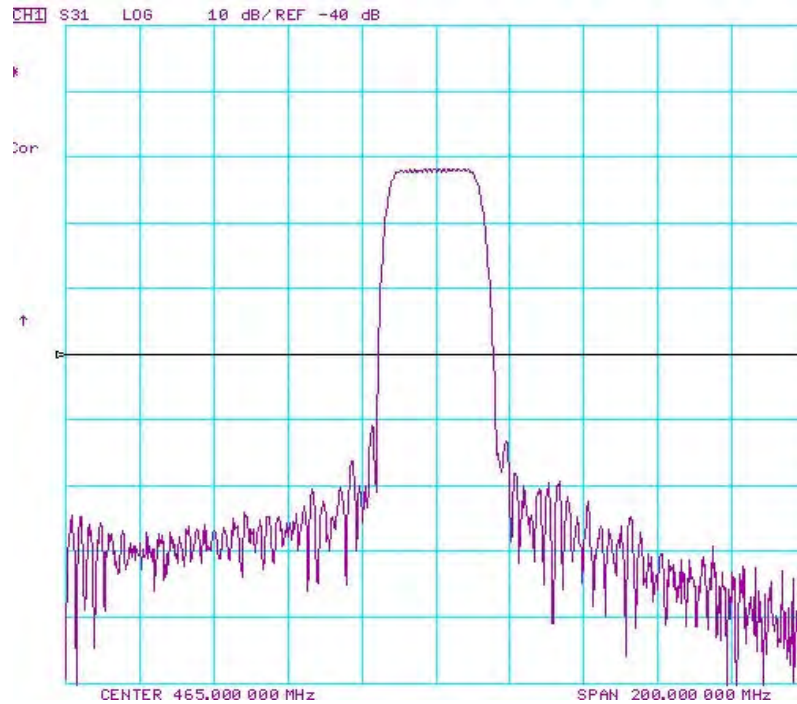


Fig1. Horizontal: 20MHz/Div Vertical: 10dB/Div

2. S21 Response (Group delay ripple of Passband)

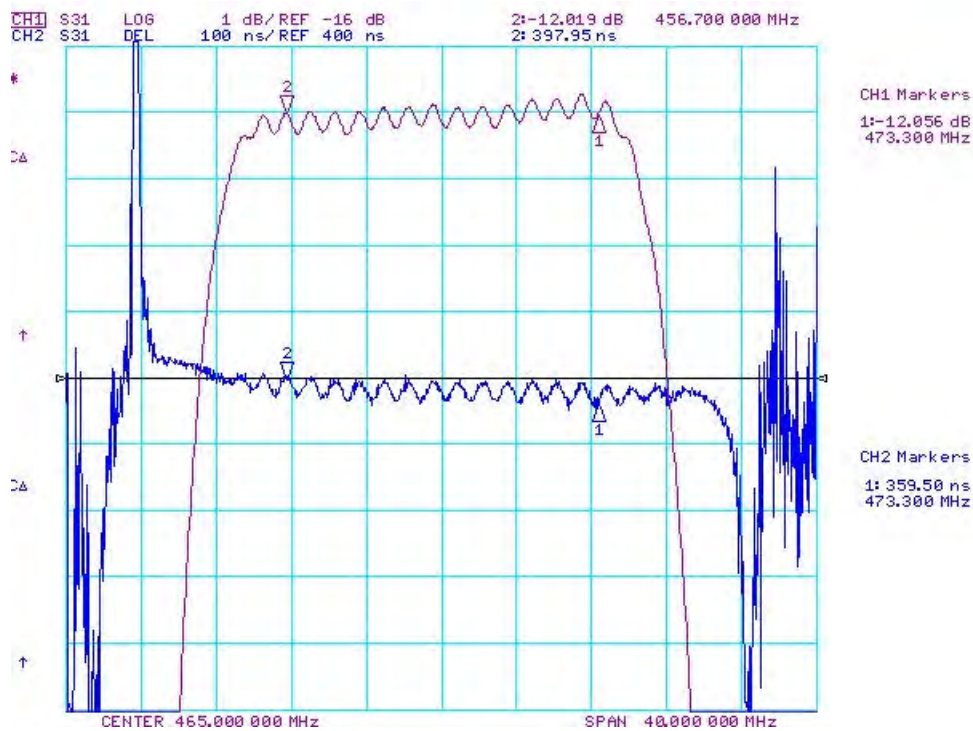


Fig2. Horizontal: 4MHz/Div Vertical: 1dB/Div. Vertical 2: 100nS/Div

465.0MHz SAW Filter
Part No: MA05709

Model: TB0206A
REV NO.: 2

3. S21 Response (Wideband)

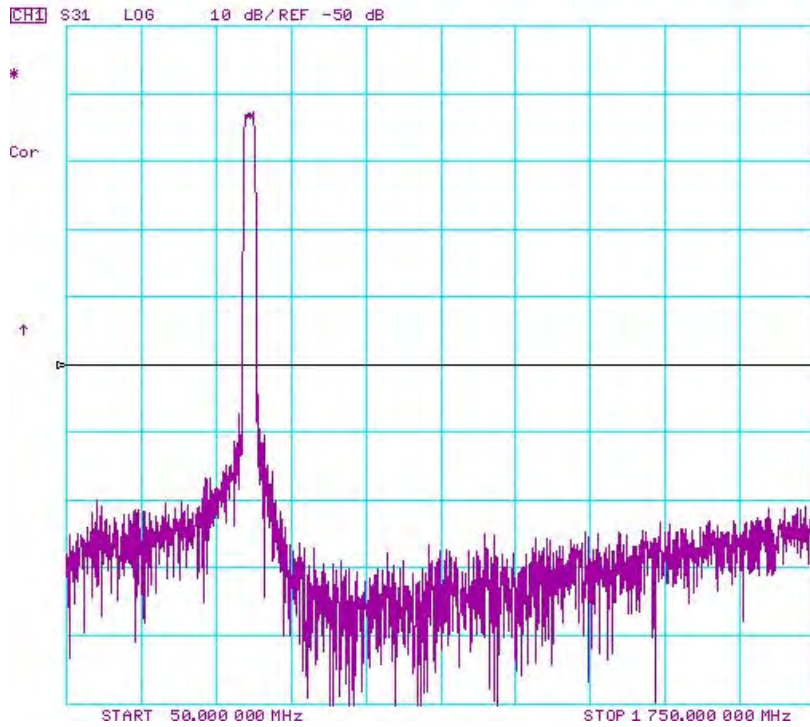


Fig3. Horizontal: 50MHz~1.75GHz Vertical: 10dB/Div

465.0MHz SAW Filter
Part No: MA05709

Model: TB0206A
REV NO.: 2

E. OUTLINE DRAWING:

