

SAW Filter 1960MHz
Part No: MA05679

Model: TA0175A
Rev No: 2

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC voltage: 0V
3. Operating Temperature: -30°C to +80°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Min.	Typ.	Max.
Center frequency Fc (dB)	-	1960	-
Insertion loss within 1930 ~ 1990MHz IL (dB)	-	2.35	4
Amplitude ripple (p-p) within 1930 ~ 1990MHz (dB)	-	1.4	2.4
Attenuation (Reference level from 0dB)			
DC ~ 1850MHz (dB)	20.0	32.0	-
1850 ~ 1910MHz (dB)	10.0	21.0	-
2010 ~ 2040MHz (dB)	4.5	10.0	-
2040 ~ 2070MHz (dB)	20.0	50.0	-
2070 ~ 5000MHz (dB)	22.0	29.0	-
VSWR within 1930 ~ 1990MHz	-	1.7	2.4
Source impedance Z _S (Ω)	-	50	-
Load impedance Z _L (Ω)	-	50	-



Note. No matching network required for operation at 50Ω

SAW Filter 1960MHz
Part No: MA05679

Model: TA0175A
Rev No: 2

C. FREQUENCY CHARACTERISTICS:

Transfer function

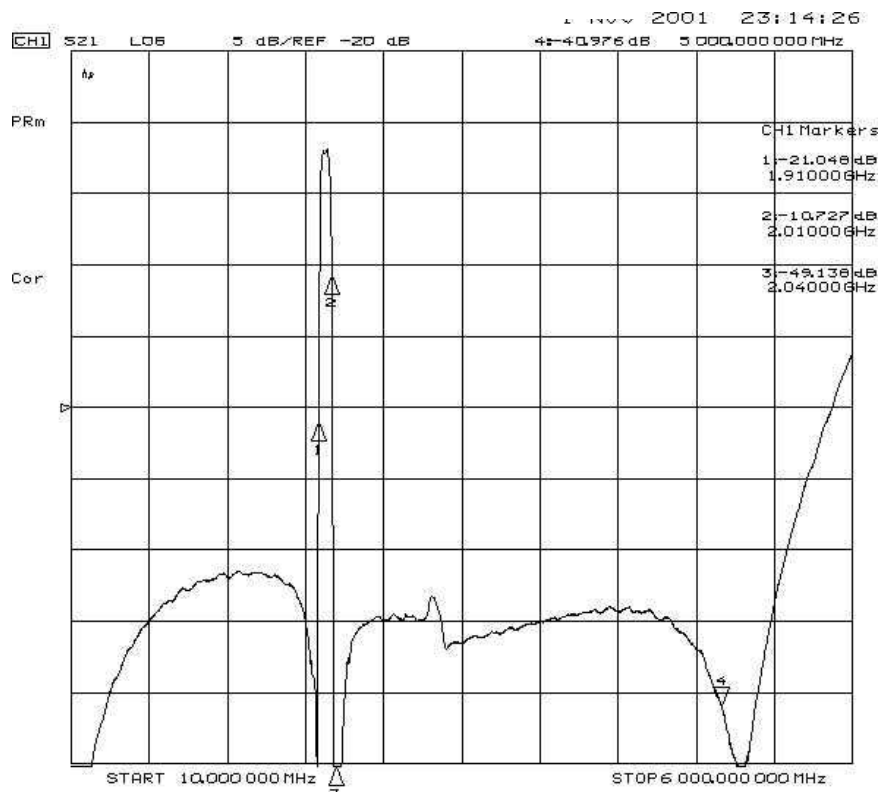
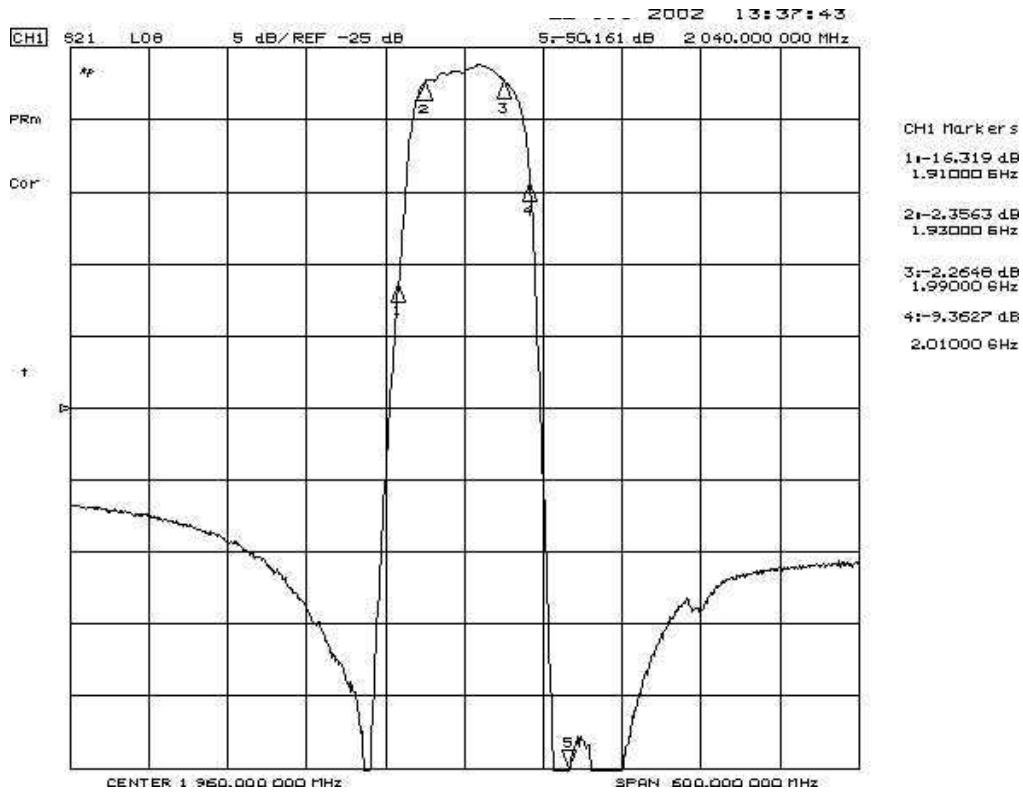


SAW Filter 1960MHz
Part No: MA05679



Model: TA0175A
Rev No: 2

Reflections Functions

S11 VSWR

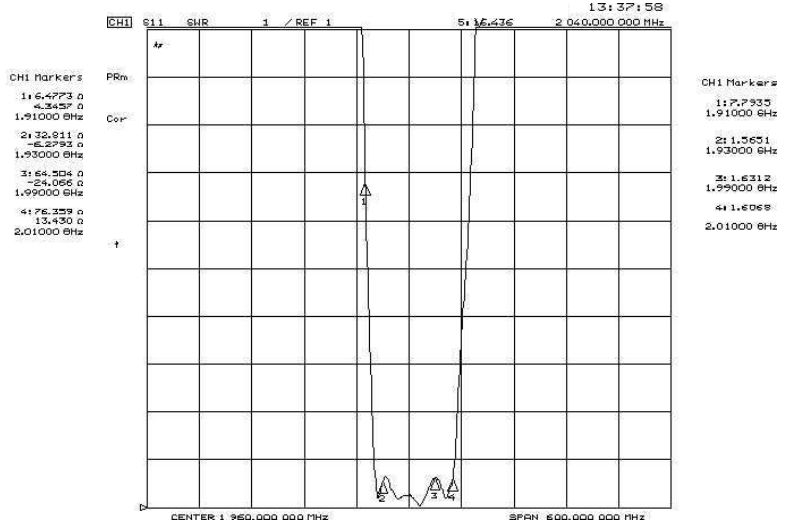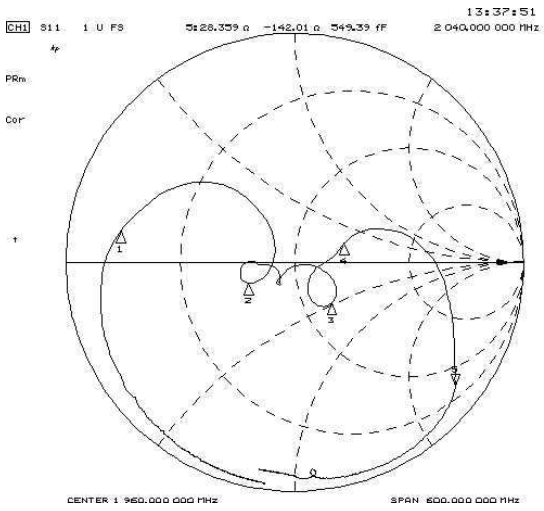

S22 VSWR

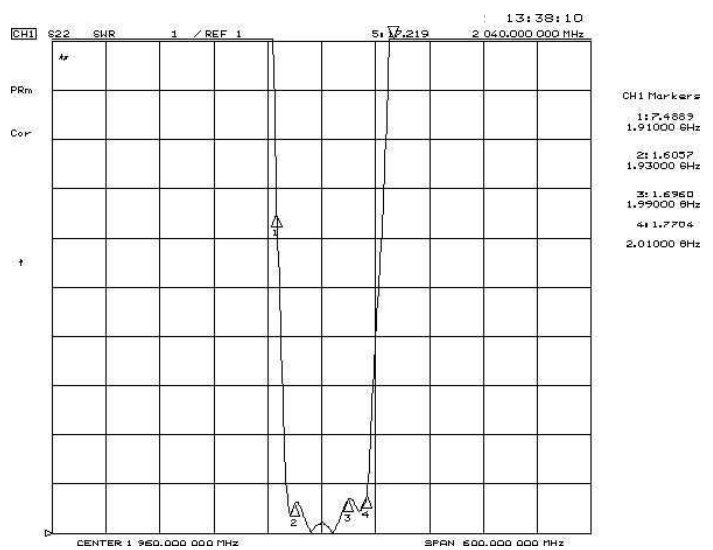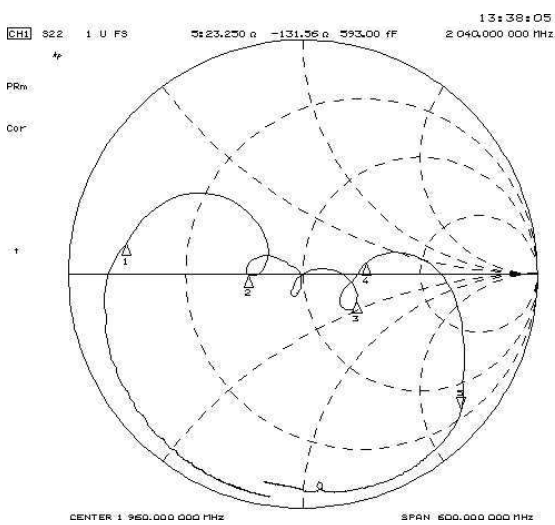


SAW Filter 1960MHz
Part No: MA05679



Model: TA0175A
Rev No: 2

D. MEASUREMENT CIRCUIT:

HP Network analyzer

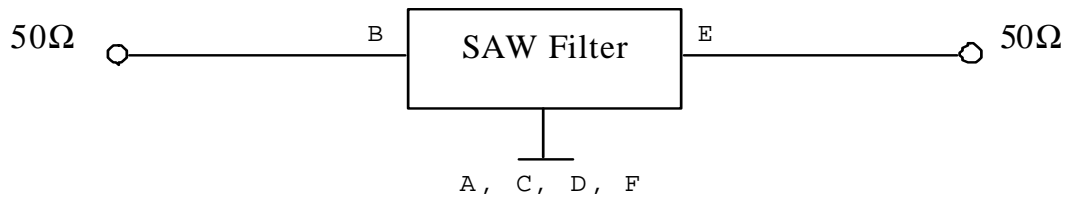

E. OUTLINE DRAWING:

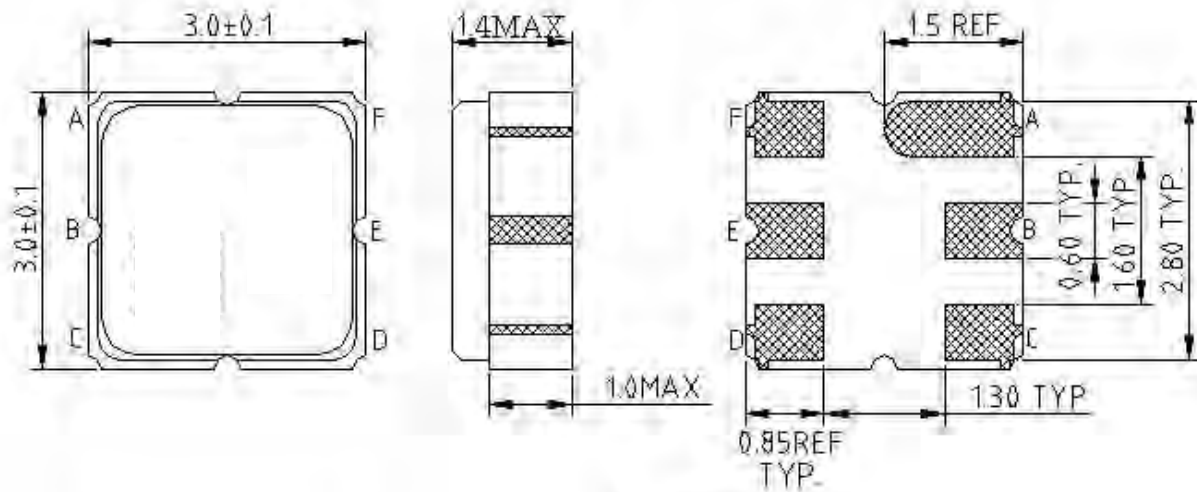


B INPUT
 E OUTPUT
 A,C,D,F GROUND
 DIMENSION mm

SAW Filter 1960MHz
Part No: MA05679


Model: TA0175A
Rev No: 2

F. PACKING:

1. REEL DIMENSION

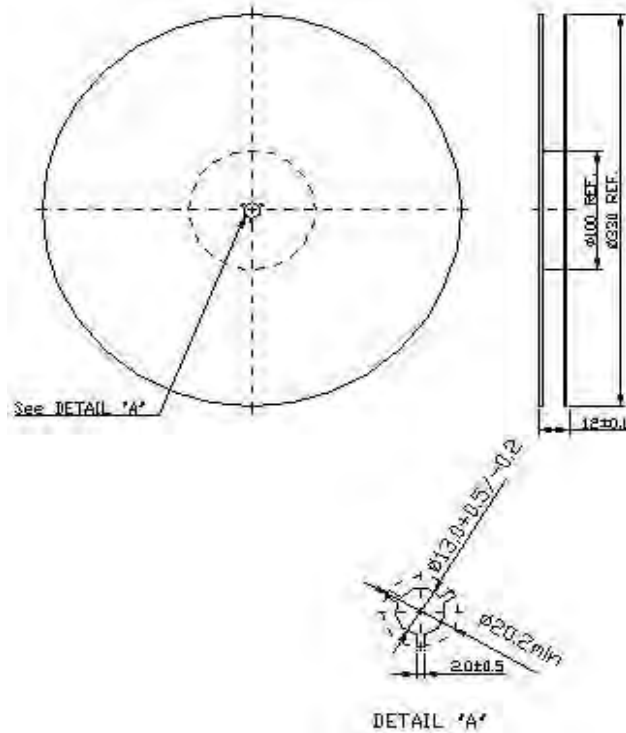

2. TAPE DIMENSION

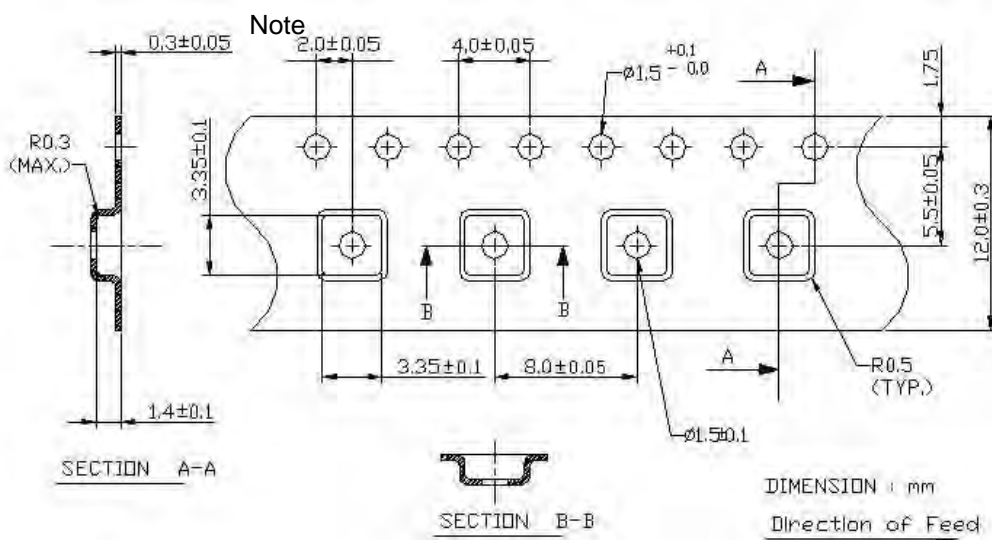

Note: Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.