

SAW Filter 1842.50MHz
Part No: MA05899

Model: TA0363A
Rev No: 1

A1. MAXIMUM RATING:

1. Input Power Level: 13dBm
2. DC voltage: 0V
3. Operating Temperature: 25°C
4. Storage Temperature: -40°C to +85°C

B1. ELECTRICAL CHARACTERISTICS:

Item	Min.	Typ.	Max.
Center frequency Fc (MHz)	-	1842.5	-
Insertion loss (1805 ~ 1880MHz) IL (dB)	-	2.2	3.8
Amplitude ripple (1805 ~ 1880MHz) (dB)	-	1.3	2.3
Attenuation (Reference level from 0dB)			
DC ~ 1500MHz (dB)	20.0	24.5	-
1500 ~ 1710MHz (dB)	22.0	25.0	-
1710 ~ 1785MHz (dB)	10.0	23.5	-
1920 ~ 3120MHz (dB)	25.0	28.0	-
3120 ~ 4000MHz (dB)	17.0	30.0	-
Input/Output VSWR (1805 ~ 1880MHz)	-	1.9	2.1
Source impedance Z _S (Ω)	-	50	-
Load impedance Z _L (Ω)	-	50	-

SAW Filter 1842.50MHz
Part No: MA05899

Model: TA0363A
Rev No: 1

A2. MAXIMUM RATING:

1. Input Power Level: 13dBm
2. DC voltage: 0V
3. Operating Temperature: -30°C to +85°C
4. Storage Temperature: -40°C to +85°C

B2. ELECTRICAL CHARACTERISTICS:


Item	Min.	Typ.	Max.
Center frequency Fc (MHz)	-	1842.5	-
Insertion loss (1805 ~ 1880MHz) IL (dB)	-	2.2	3.8
Amplitude ripple (1805 ~ 1880MHz) (dB)	-	1.3	2.3
Attenuation (Reference level from 0dB)			
DC ~ 1500MHz (dB)	20.0	24.5	-
1500 ~ 1710MHz (dB)	22.0	25.0	-
1710 ~ 1785MHz (dB)	10.0	23.5	-
1920 ~ 3120MHz (dB)	25.0	28.0	-
3120 ~ 4000MHz (dB)	17.0	30.0	-
Input/Output VSWR (1805 ~ 1880MHz)	-	2.0	2.2
Source impedance Z _S (Ω)	-	50	-
Load impedance Z _L (Ω)	-	50	-

SAW Filter 1842.50MHz
Part No: MA05899


Model: TA0363A
Rev No: 1

C. MEASUREMENT CIRCUIT:

HP Network analyzer

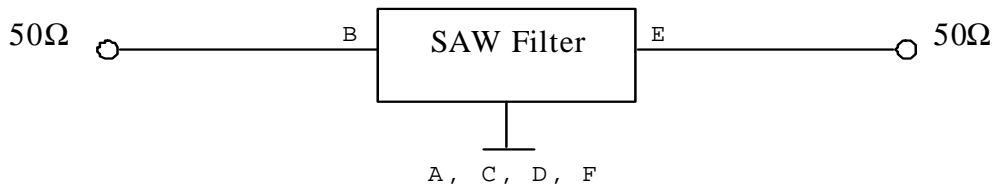

D. OUTLINE DRAWING:


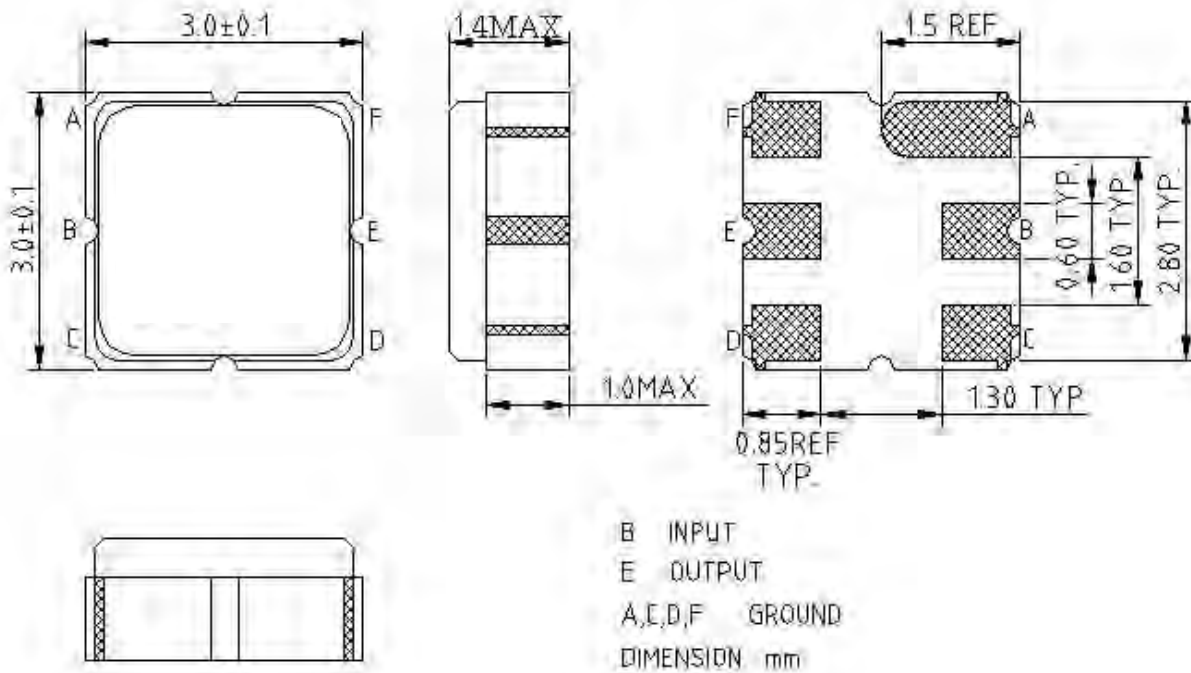


SAW Filter 1842.50MHz
Part No: MA05899

Model: TA0363A
Rev No: 1

E. FREQUENCY CHARACTERISTICS:

Transfer function

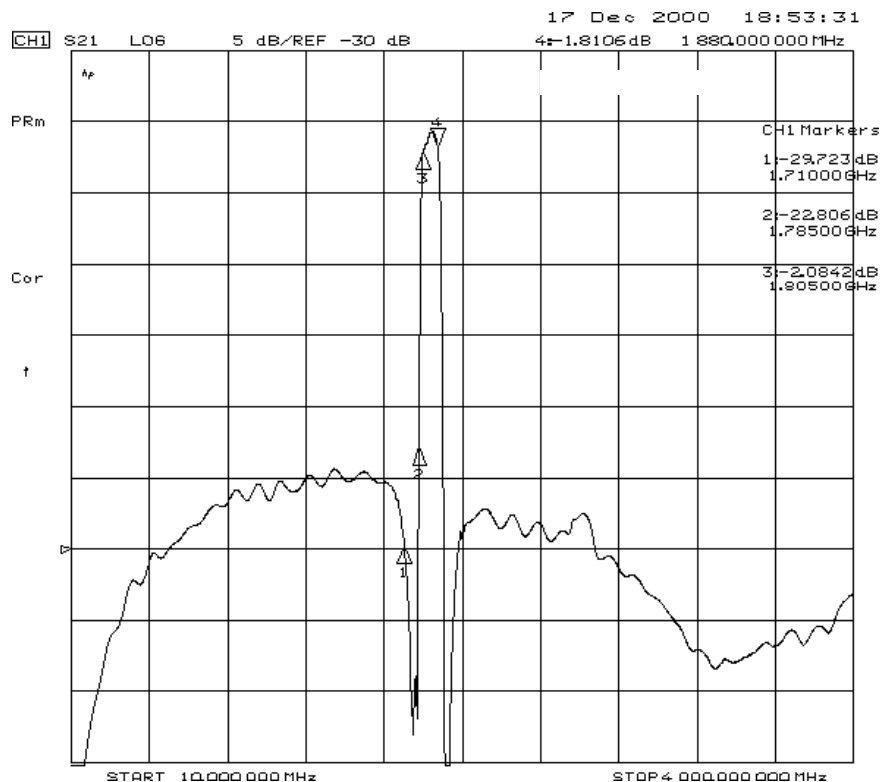
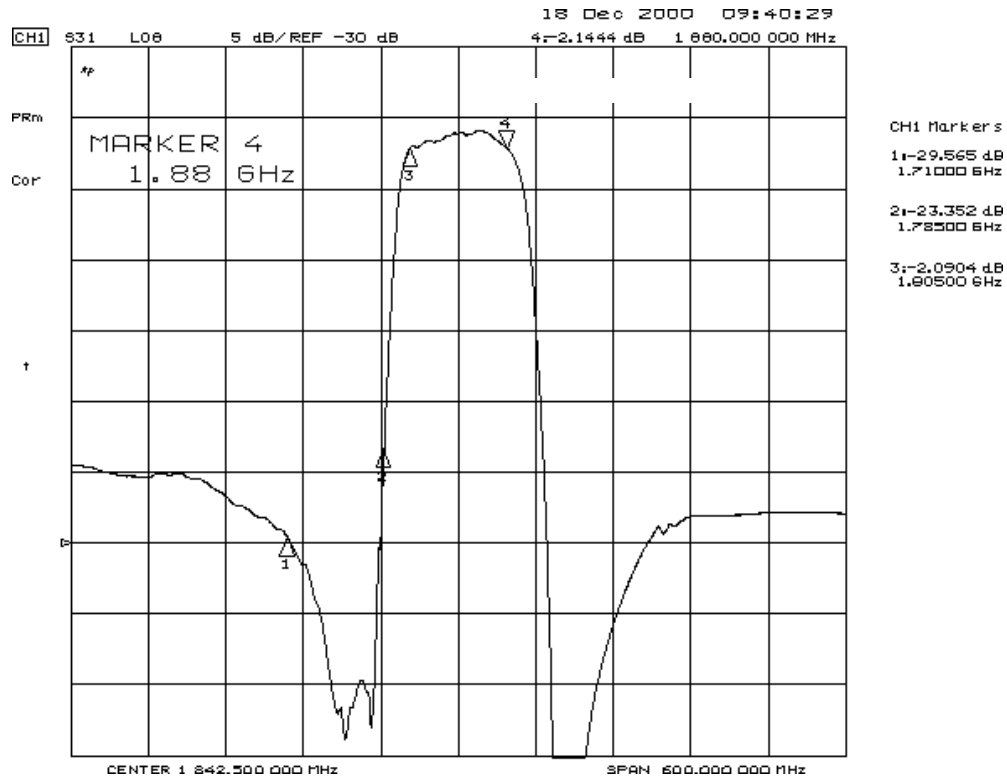


SAW Filter 1842.50MHz
Part No: MA05899



Model: TA0363A
Rev No: 1

Reflections Functions

S11

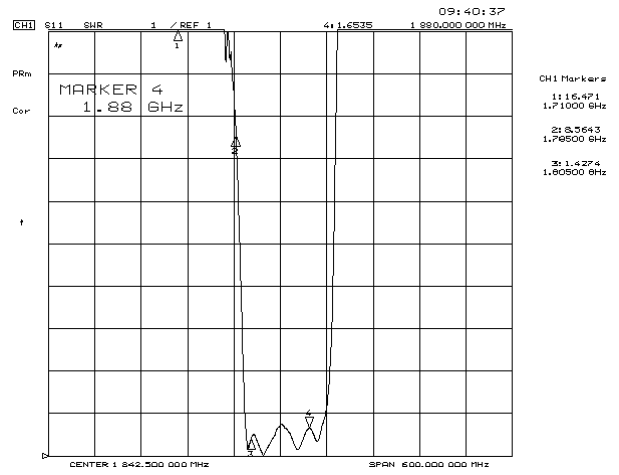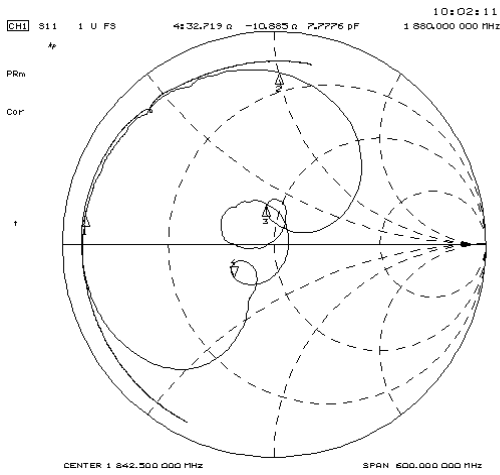

S22

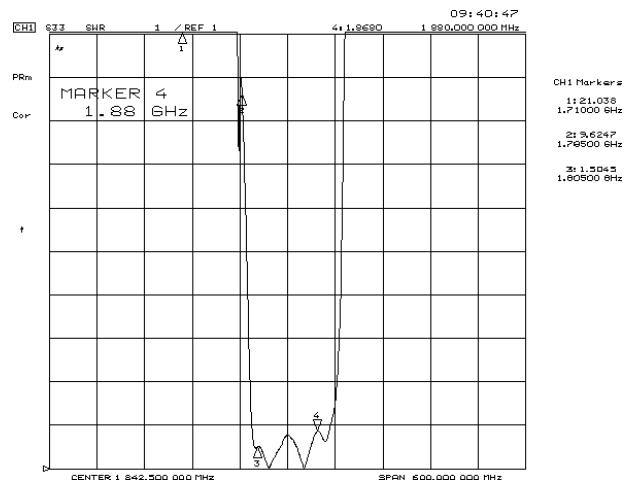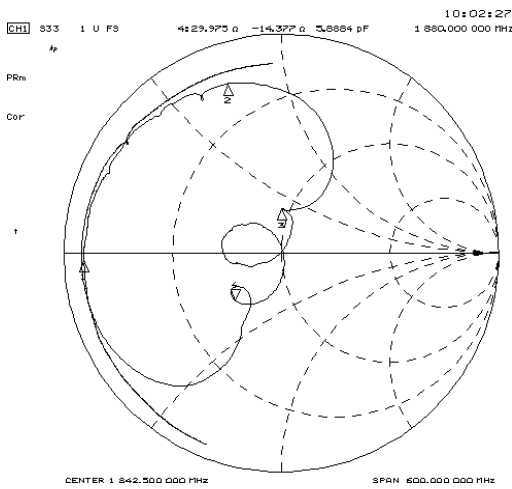


SAW Filter 1842.50MHz
Part No: MA05899

Model: TA0363A
Rev No: 1

F. PACKING:

1. REEL DIMENSION

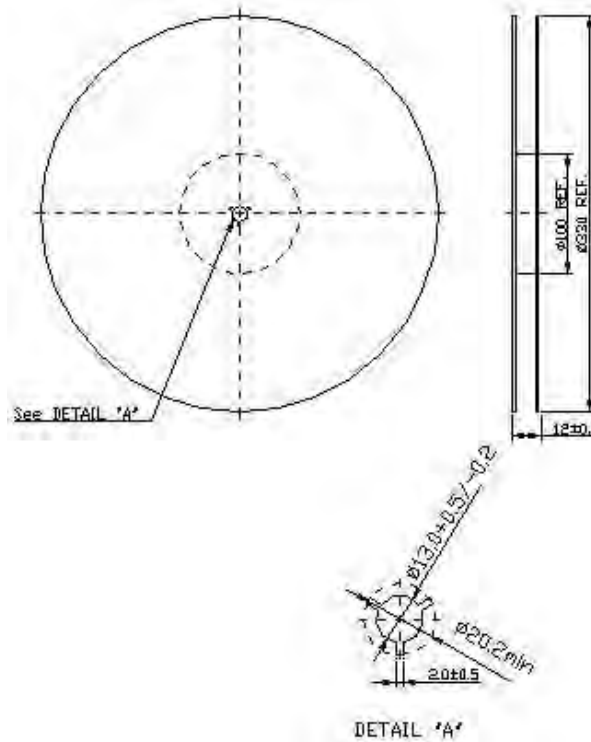

2. TAPE DIMENSION

