

SAW Filter 1960MHz
Part No: MA05927

Model: TA0207A
Rev No: 2

A. MAXIMUM RATING:

1. Input Power Level: 10dBm
2. DC voltage: 0V
3. Operating Temperature: -25°C to +75°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Min.	Typ.	Max.
Center frequency Fc (dB)	-	1960	-
Insertion loss within 1930 ~ 1990MHz IL (dB)	-	2.7	3.3
Amplitude ripple (p-p) within 1930 ~ 1990MHz (dB)	-	1.2	2.0
Attenuation (Reference level from 0dB)			
DC ~ 1850MHz (dB)	17.0	24.5	-
1850 ~ 1910MHz (dB)	6.0	12.6	-
2010 ~ 2070MHz (dB)	4.5	8.0	-
2070 ~ 2500MHz (dB)	20.0	29.0	-
2500 ~ 4000MHz (dB)	23.0	30.0	-
VSWR within 1930 ~ 1990MHz	-	1.7	2.5
Source impedance Z _S (Ω)	-	50	-
Load impedance Z _L (Ω)	-	50	-



Note1. No matching network required for operation at 50Ω

SAW Filter 1960MHz
Part No: MA05927

Model: TA0207A
Rev No: 2

C. FREQUENCY CHARACTERISTICS:

Transfer function

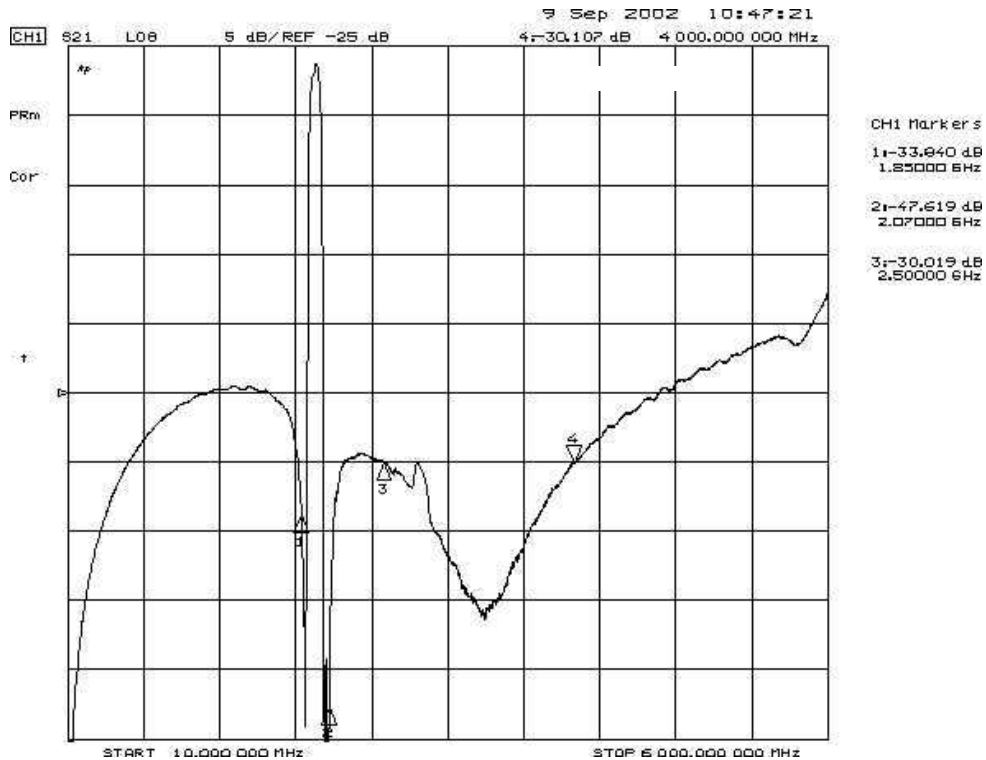
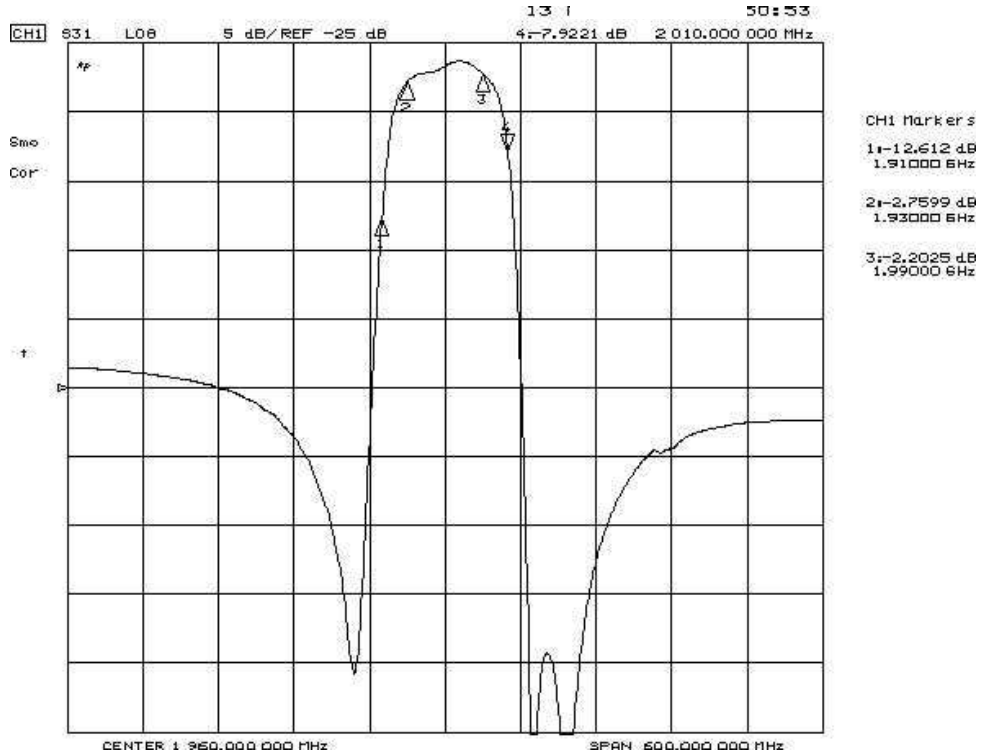


SAW Filter 1960MHz
Part No: MA05927



Model: TA0207A
Rev No: 2

Reflection Functions

S11 VSWR

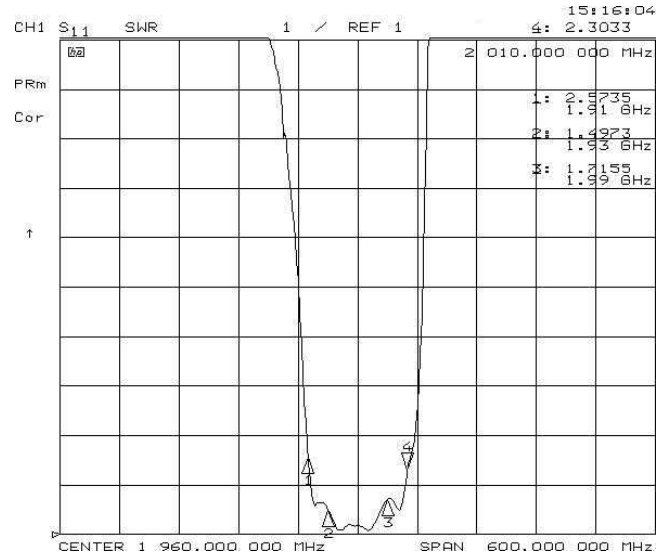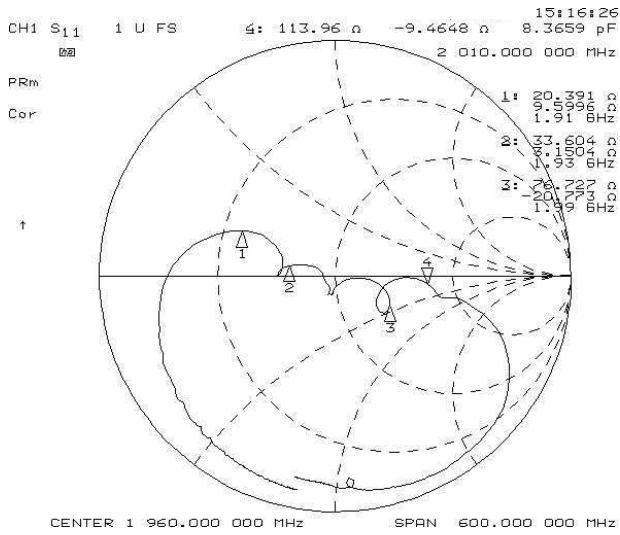


S22 VSWR

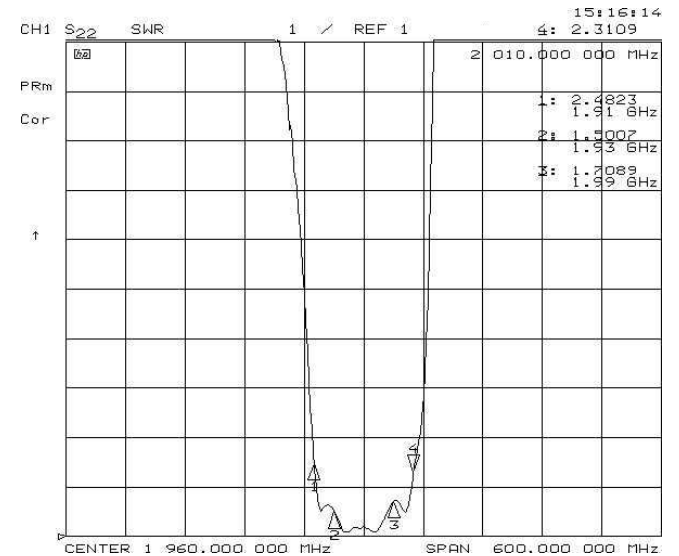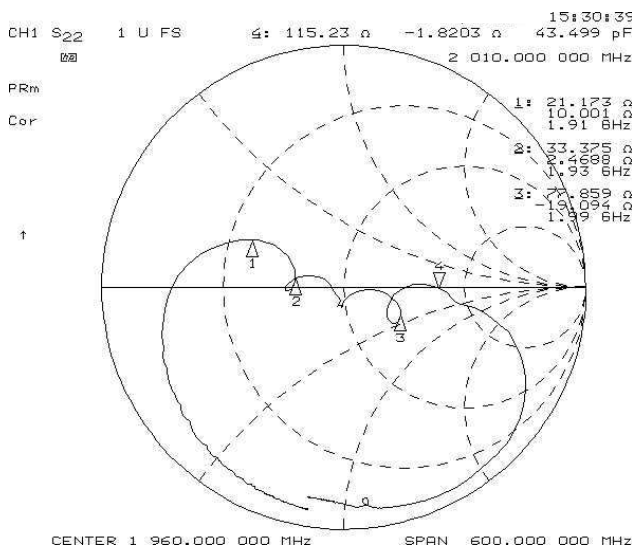


SAW Filter 1960MHz
Part No: MA05927

Model: TA0207A
Rev No: 2

D. MEASUREMENT CIRCUIT:

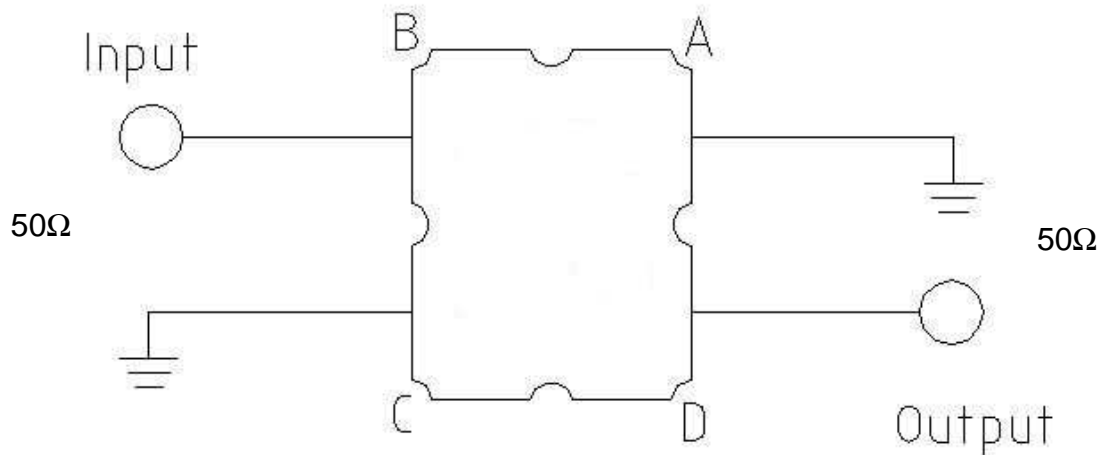

E. OUTLINE DRAWING:

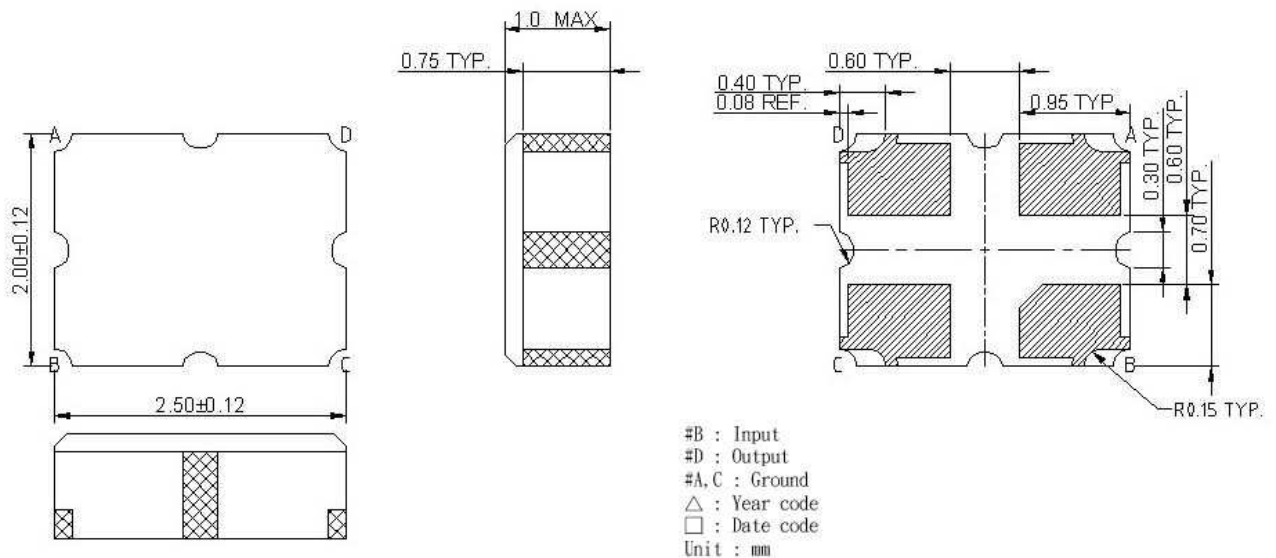


SAW Filter 1960MHz
Part No: MA05927

Model: TA0207A
Rev No: 2

F. PACKING:

1. REEL DIMENSION

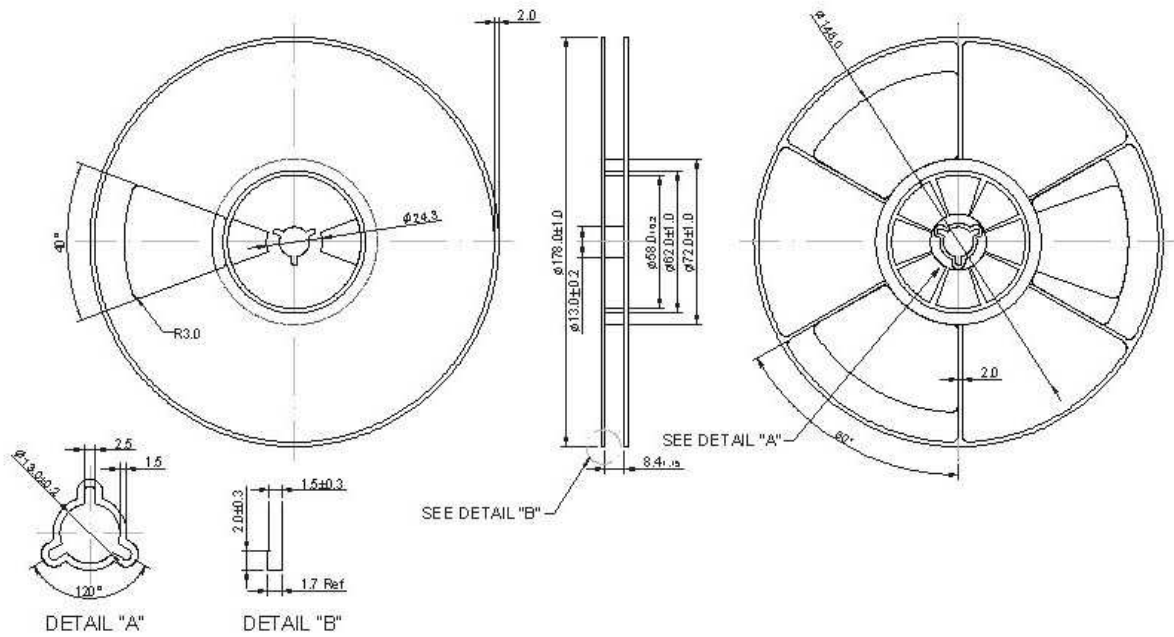

2. TAPE DIMENSION

