

SAW Filter 670.0MHz
Part No: MP03602

Model: TA1050A
Rev No: 1

A. MAXIMUM RATING:


1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: 0°C to +50°C
4. Storage Temperature: -30°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center Frequency Fc	MHz	-	670	-
Insertion Loss at Center Frequency IL c	dB	-	1.7	2.2
Insertion Loss (660 ~ 680MHz)	dB	-	2.3	4
Amplitude Ripple (660 ~ 680MHz)	dB	-	0.8	2
Bandwidth @ -2dB	MHz	20	29	-
VSWR at Center Frequency	-	-	1.4	2
Attenuation (Reference level from 0dB)				
DC ~ 608MHz	dB	50	60	-
608 ~ 614MHz	dB	30	60	-
726 ~ 732MHz	dB	30	51	-
1278 ~ 1402MHz	dB	40	54	-
1948 ~ 2072MHz	dB	35	38	-

C. MEASUREMENT CIRCUIT:


HP Network analyzer

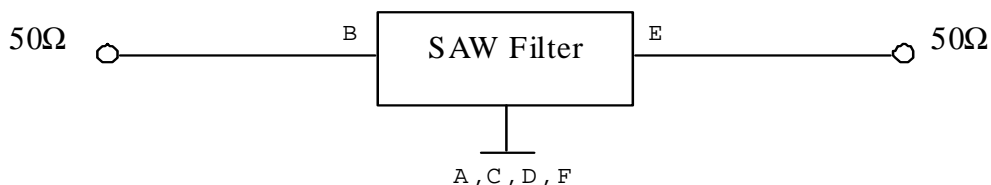

SAW Filter 670.0MHz
Part No: MP03602


Model: TA1050A
Rev No: 1

D. OUTLINE DRAWING:

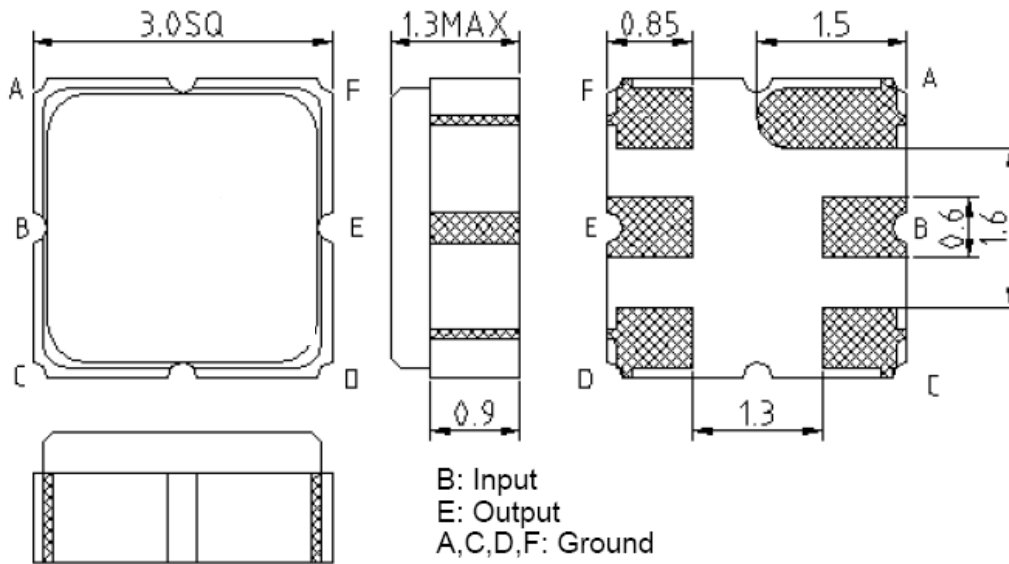

Unit: mm



E. PCB FOOTPRINT:

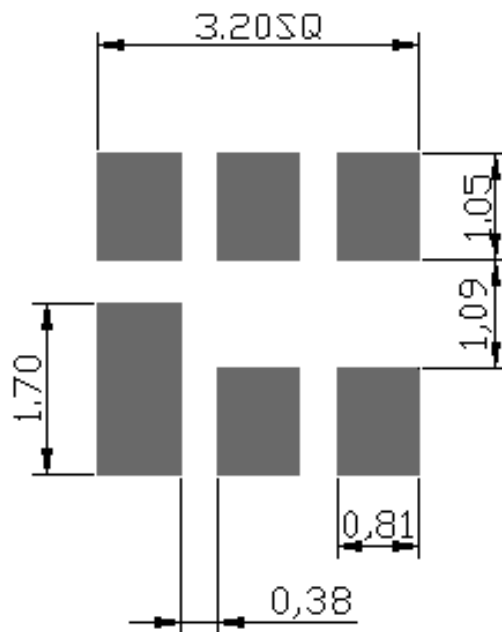

SAW Filter 670.0MHz
Part No: MP03602


Model: TA1050A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

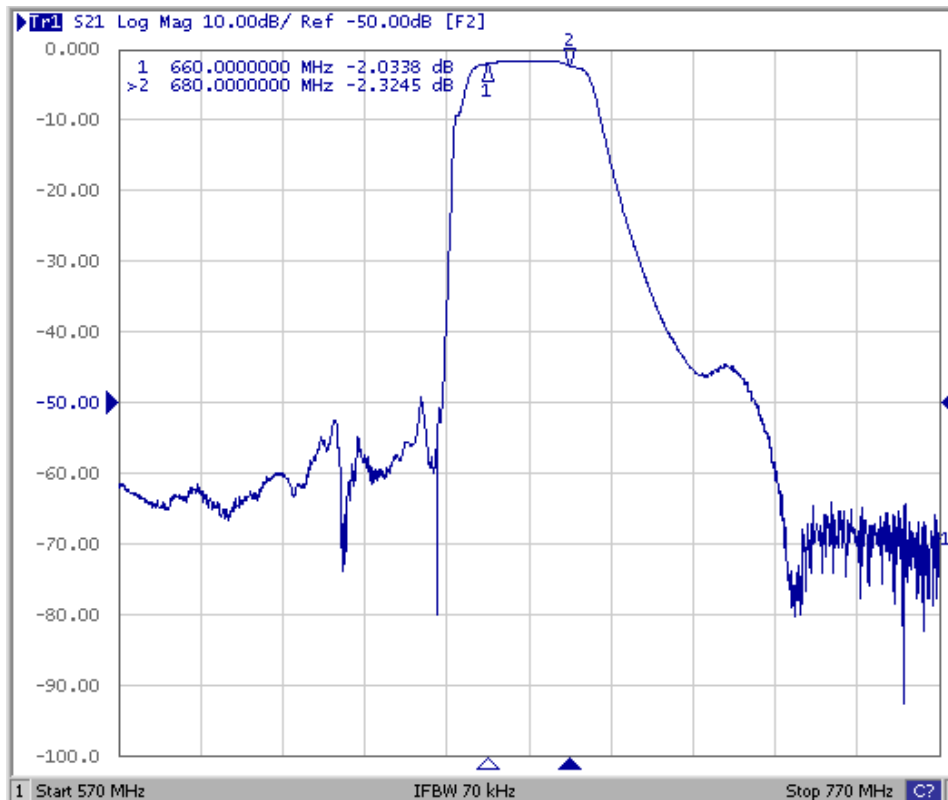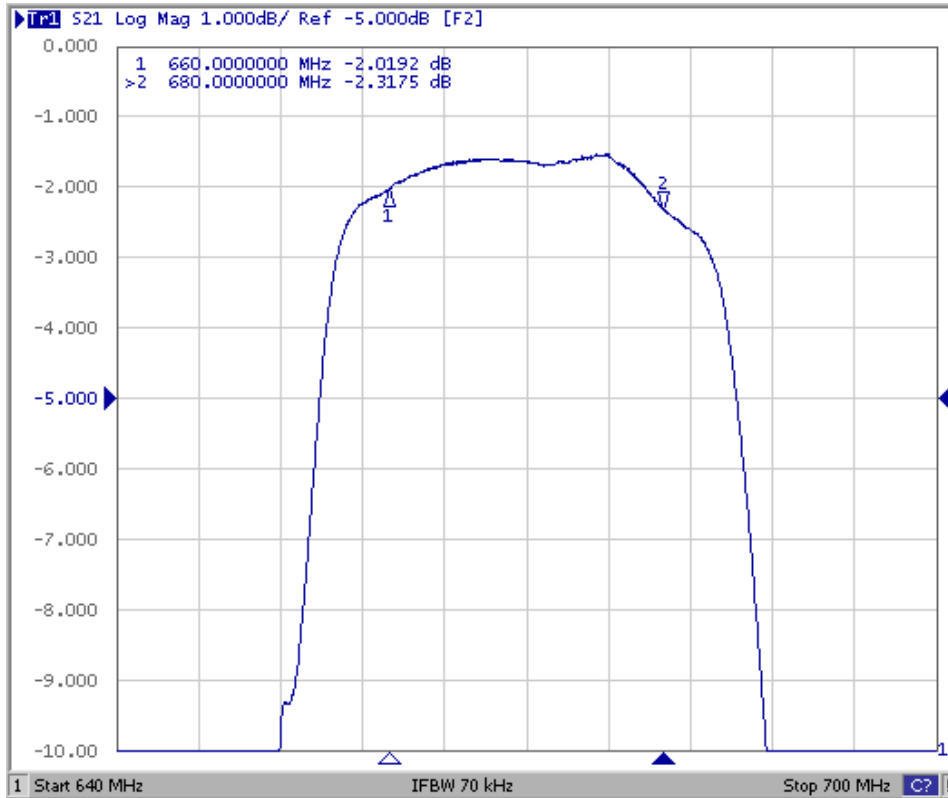

SAW Filter 670.0MHz
Part No: MP03602

Model: TA1050A
Rev No: 1

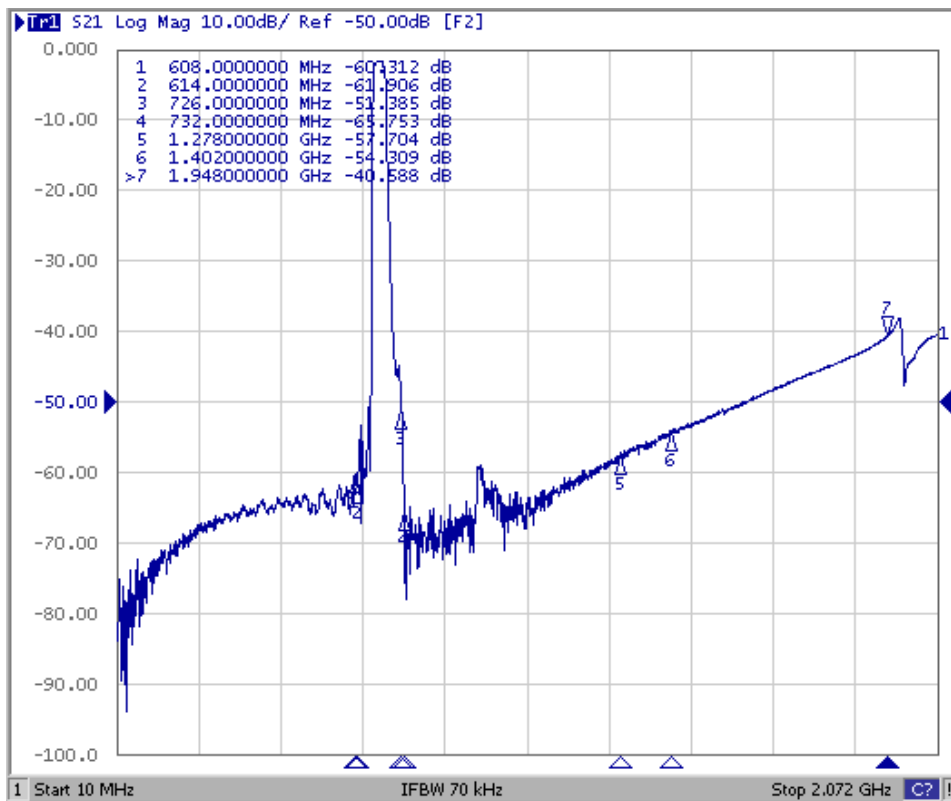


SAW Filter 670.0MHz
Part No: MP03602


Model: TA1050A
Rev No: 1

Reflection Functions

S11

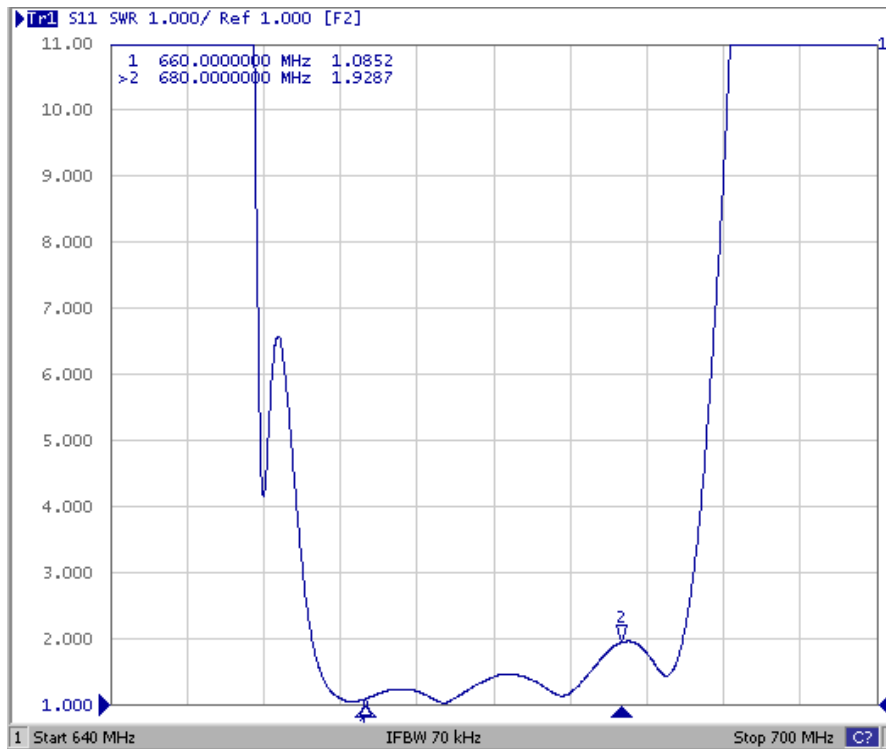

S22

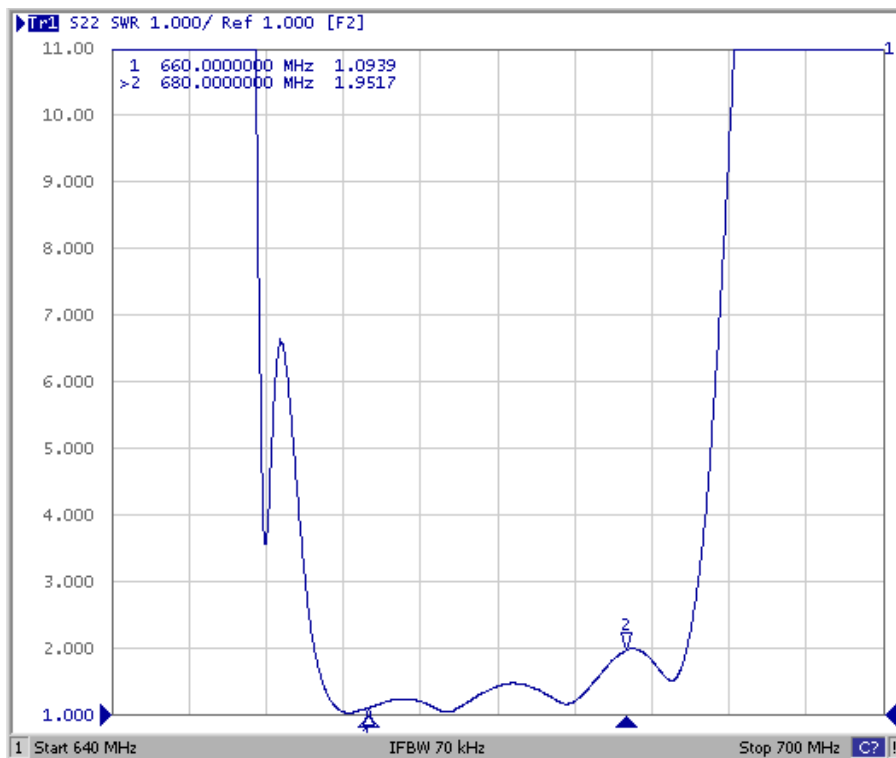


SAW Filter 670.0MHz
Part No: MP03602


Model: TA1050A
Rev No: 1

G. PACKING:

1. REEL DIMENSION

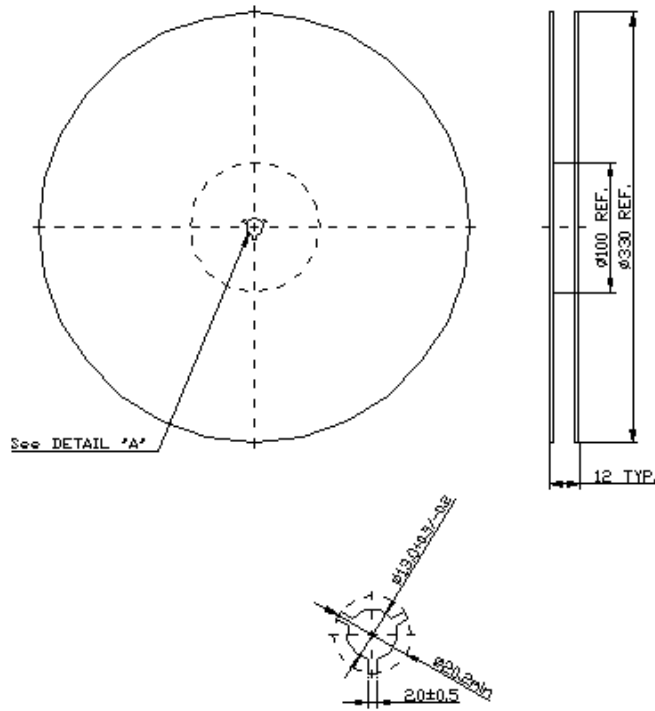

2. TAPE DIMENSION

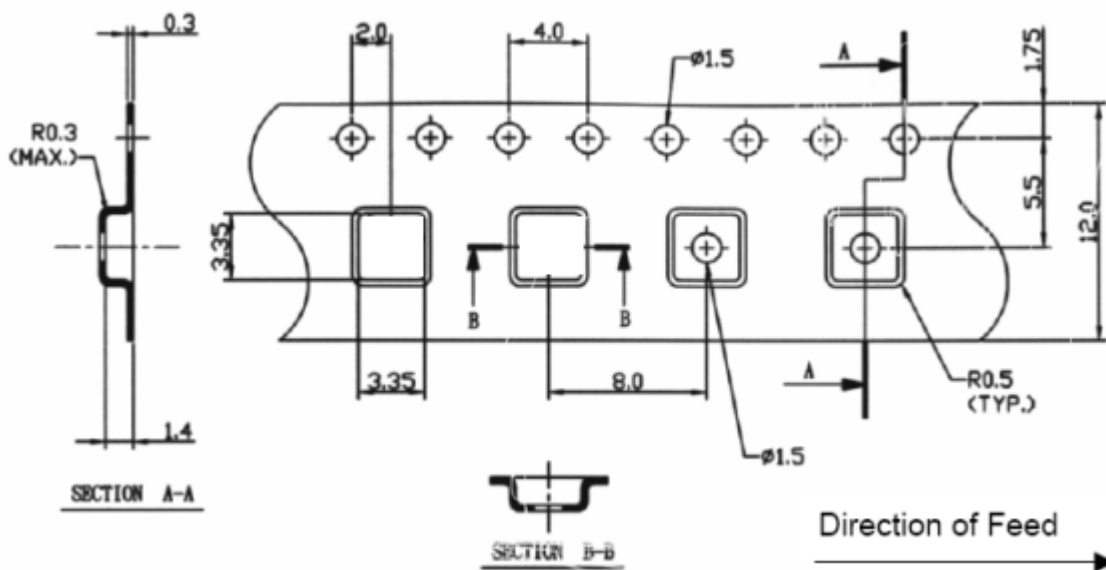

SAW Filter 670.0MHz
Part No: MP03602

Model: TA1050A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

