

SAW Filter 343.5MHz
Part No: MA07746

Model: TA0188A
Rev No: 1

A. MAXIMUM RATING:


1. Input Power Level: 10dBm
2. DC voltage: 0V
3. Operating Temperature: -10°C to +50°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Characteristics	Min.	Typ.	Max.
Center frequency Fc (dB)	-	343.5	-
Insertion loss within 341.5 ~ 345.5MHz IL (dB)	-	3.1	4.0
Amplitude ripple (p-p) within 341.5 ~ 345.5MHz (dB)	-	0.9	2.0
Attenuation (Reference level from 0dB)			
Fc -40 to -9MHz (dB)	30.0	43.0	-
Fc +9 to +40MHz (dB)	15.0	25.5	-
Fc -100 to -40MHz (dB)	50.0	65.0	-
Fc +40 to +100MHz (dB)	50.0	68.0	-
Source impedance Z _S (Ω)	-	52.23 - j 29.66	-
Load impedance Z _L (Ω)	-	52.23 - j 29.66	-

Note1: The standard definitions is in JIS C 6703


Note2:

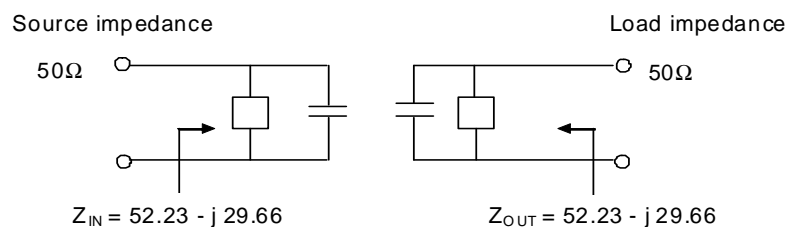



SAW Filter 343.5MHz
Part No: MA07746

Model: TA0188A
Rev No: 1

C. MEASUREMENT CIRCUIT:

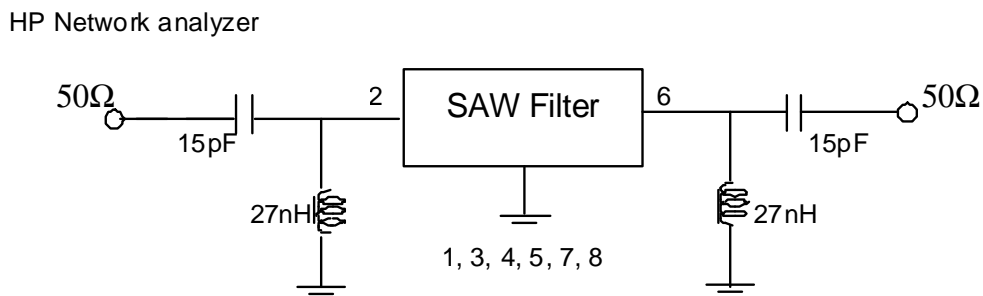

D. OUTLINE DRAWING:

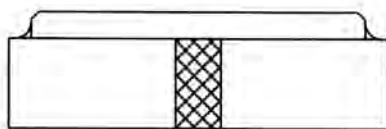
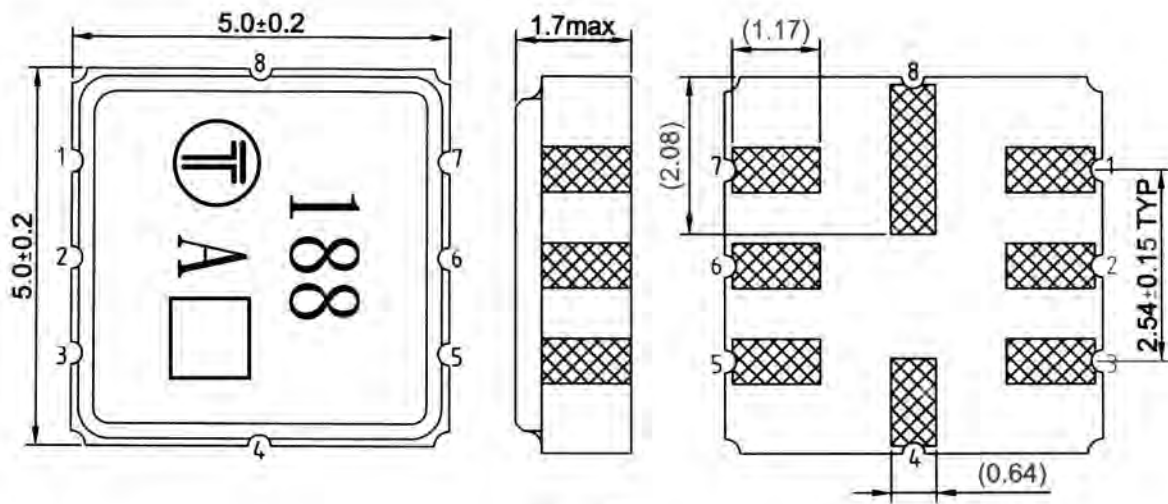


- #2 : Input
 - #6 : Output
 - #1、3、5、7 : Ground
 - #4、8 : Case Ground
 - : Date code
- Unit : mm

SAW Filter 343.5MHz
Part No: MA07746

Model: TA0188A
Rev No: 1

E. FREQUENCY CHARACTERISTICS:

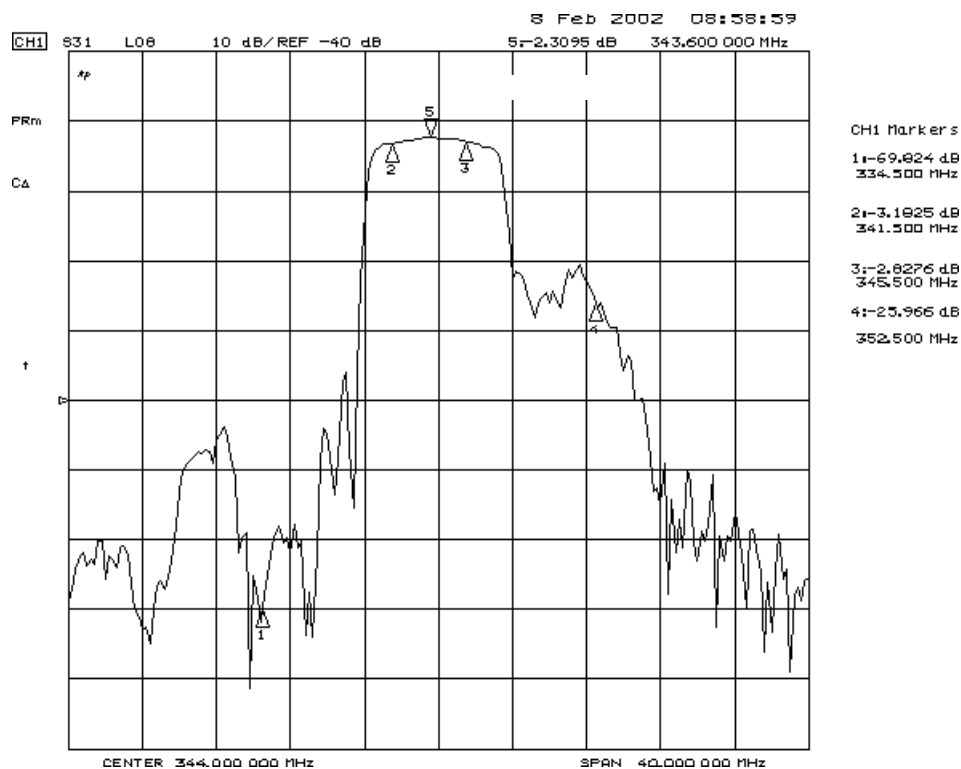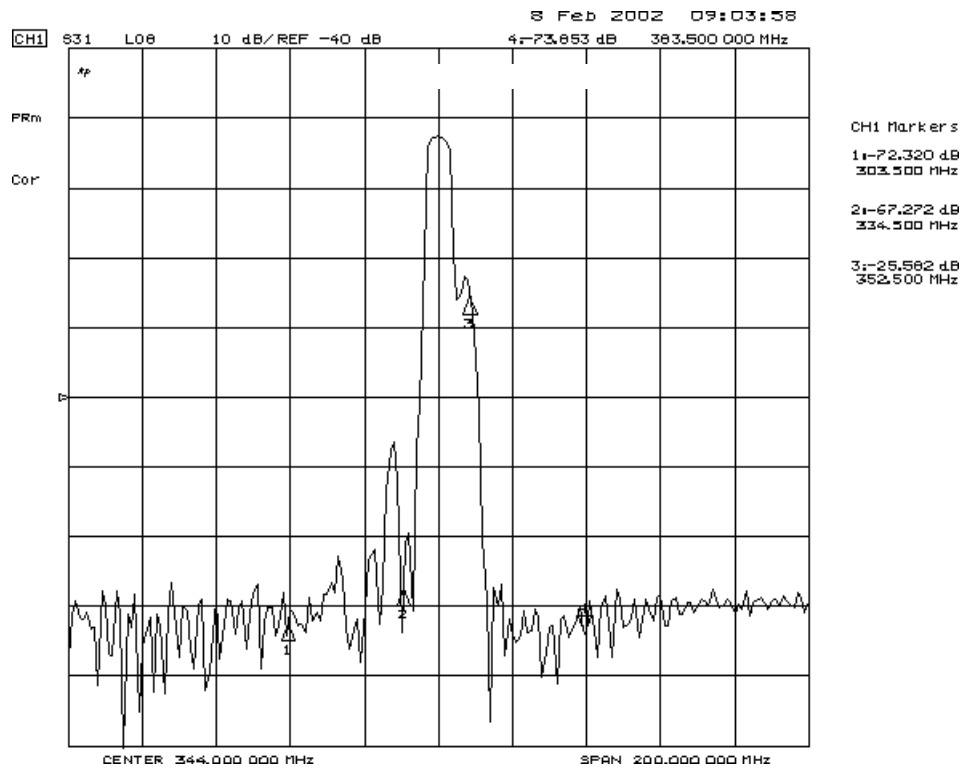


SAW Filter 343.5MHz
Part No: MA07746

Model: TA0188A
Rev No: 1

F. PACKING:

1. REEL DIMENSION

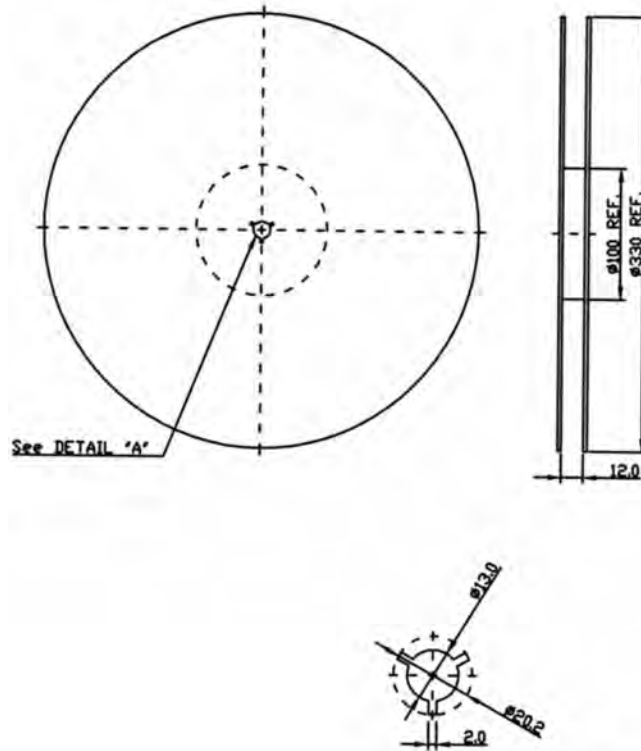

2. TAPE DIMENSION

