

SAW Filter 1191.80MHz
Part No: MP06273

Model: TA1686A
Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)


1. Input Power Level: 10dBm
2. DC voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	1200	-
Insertion loss (1160 ~ 1240MHz) IL	dB	-	5.1	7
Pass Band Ripple (1160 ~ 1240MHz)	dB	-	2.4	4.2
Group Delay Variation (1160 ~ 1240MHz)	ns	-	12	35
Return loss (1160 ~ 1240MHz)	dB	6	6.5	-
Attenuation (Reference level from 0dB)				
300 ~ 1120MHz	dB	22	32	-
1293 ~ 2000MHz	dB	22	35	-
Temperature Coefficient of Frequency	ppm/°C	-	-80	-

C. MEASUREMENT CIRCUIT:

HP Network analyzer


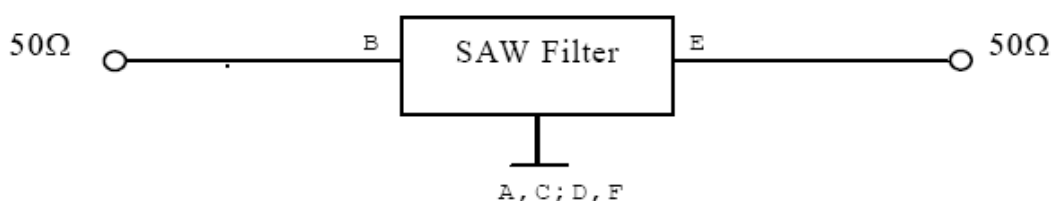


SAW Filter 1191.80MHz
Part No: MP06273

Model: TA1686A
Rev No: 1

D. FREQUENCY CHARACTERISTICS:

1. Transfer Function

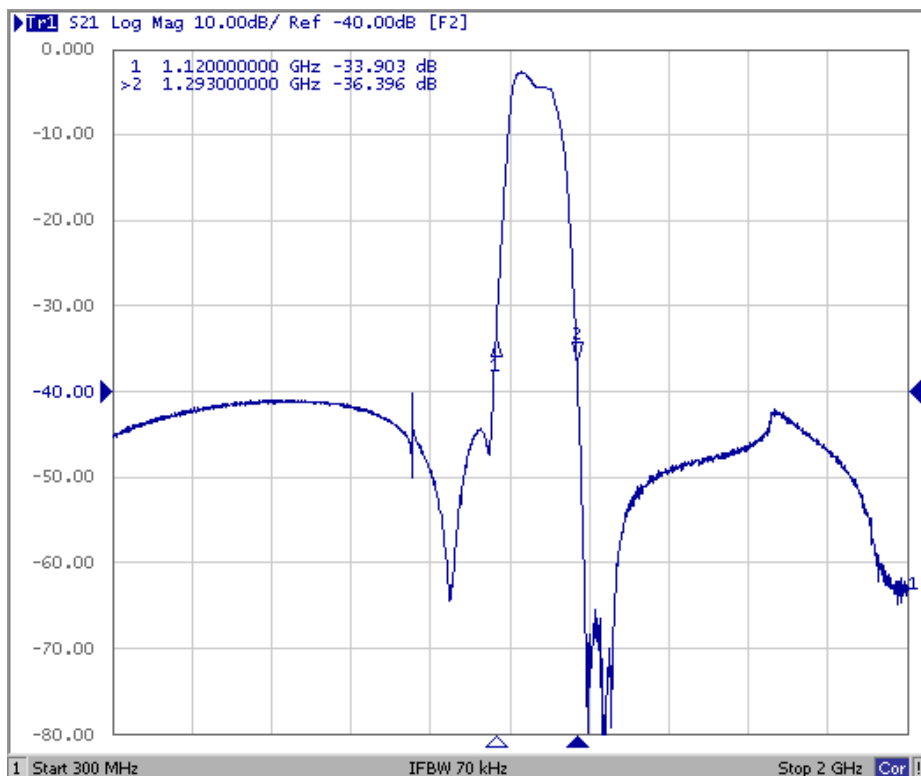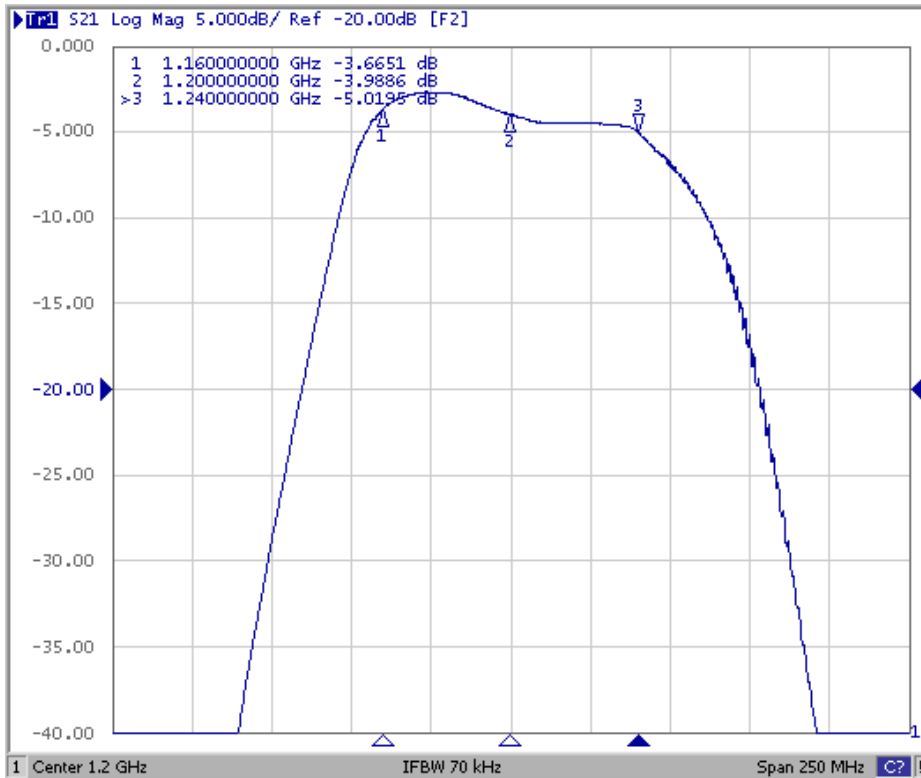


SAW Filter 1191.80MHz
Part No: MP06273


Model: TA1686A
Rev No: 1

2. Reflection Functions

S11

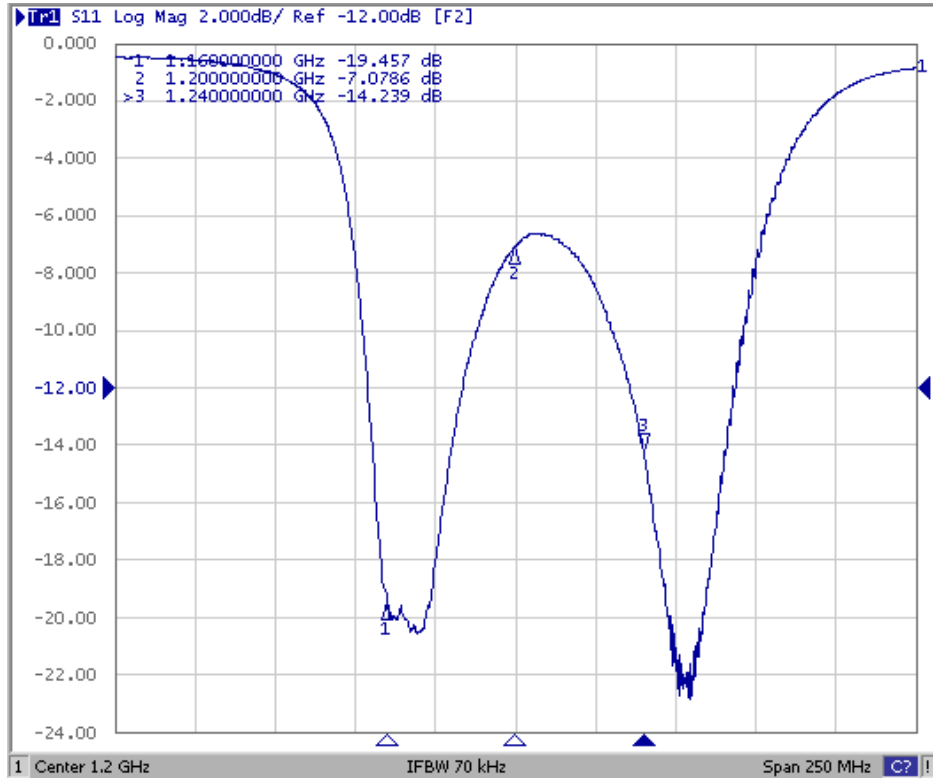


S22

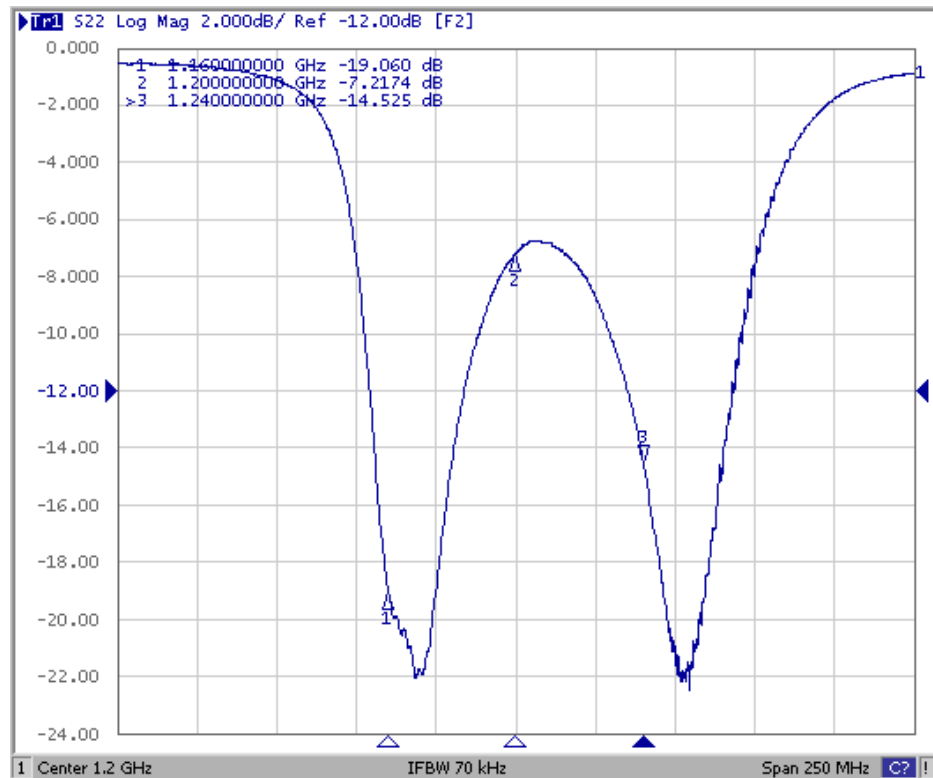

SAW Filter 1191.80MHz
Part No: MP06273


Model: TA1686A
Rev No: 1

E. OUTLINE DRAWING:

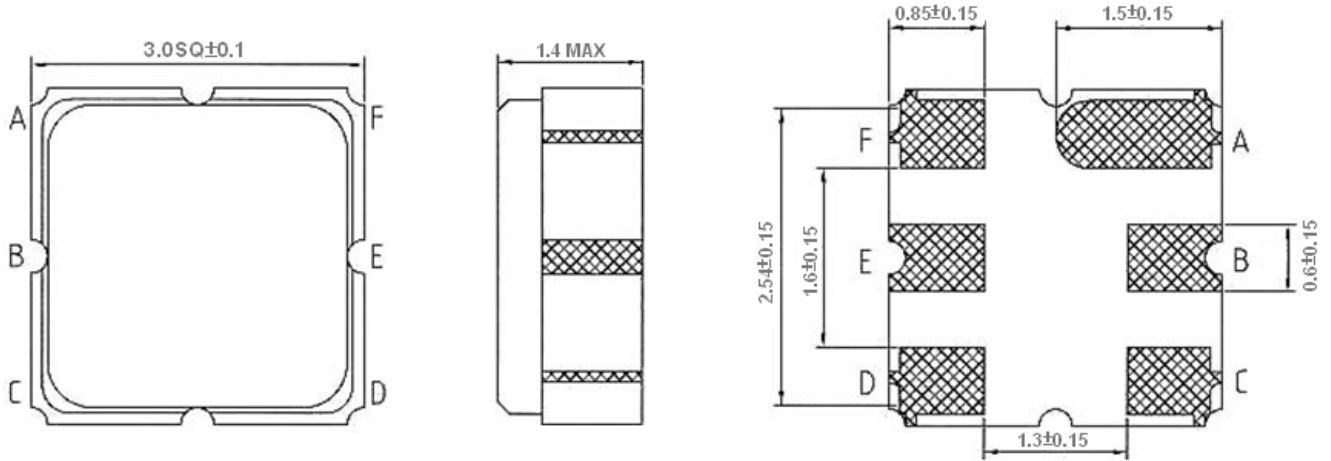

B: Input
E: Output
A, C, D, F: Ground
Unit: mm

F. PCB FOOTPRINT:

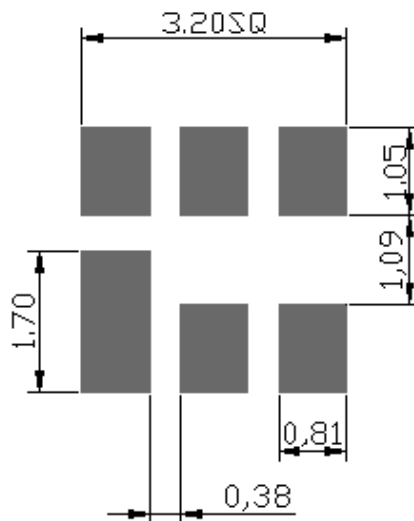


SAW Filter 1191.80MHz
Part No: MP06273


Model: TA1686A
Rev No: 1

G. PACKING:

1. Reel Dimension (Please refer to FR-75D10 for packing quantity)

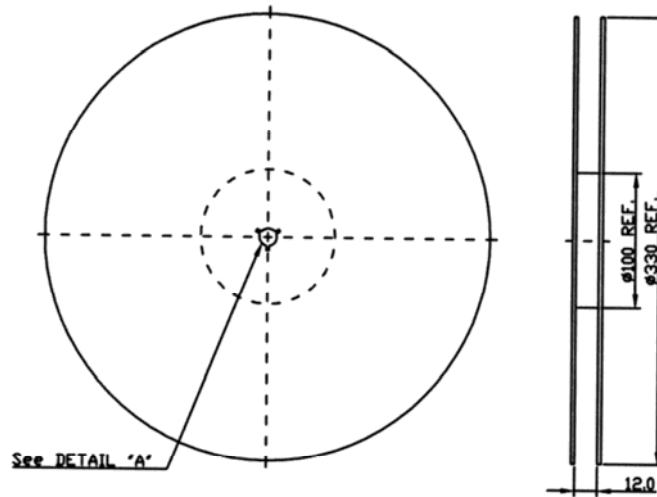

2. Tape Dimension

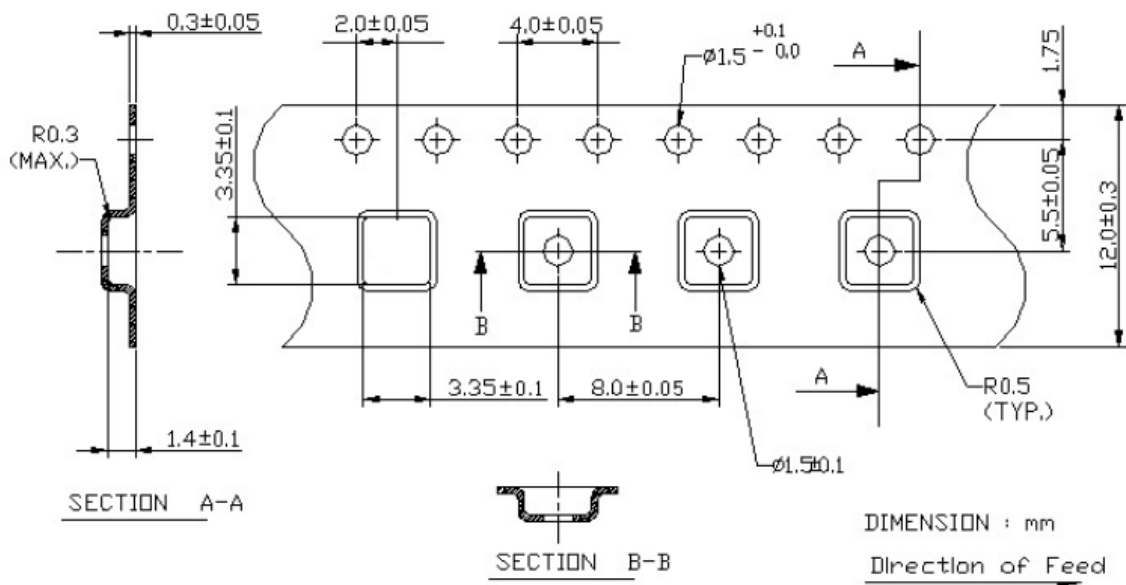

SAW Filter 1191.80MHz
Part No: MP06273

Model: TA1686A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

