

SAW Filter 869.2250MHz

Model: TA1912A

Part No: MP07119

Rev No: 2

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)


1. Input Power Level: 20dBm
2. DC Voltage: 5V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source/load impedance (single): $Z_S = 50\Omega / Z_L = 50\Omega$
2. Test Temperature 25°C

Item	Unit	Min	Typ.	Max
Center Frequency Fc	MHz	-	869.225	-
Insertion Loss (868.3 ~ 870.15MHz) IL	dB		4.0	5.0
VSWR (868.3 ~ 870.15MHz)			1.3	2.0
Amplitude ripple				
868.3 ~ 870.15MHz	dB		1.0	2.0
Attenuation				
50 ~ 791MHz	dB	45	50	
791 ~ 848MHz	dB	35	40	
848 ~ 862MHz	dB	30	40	
880 ~ 883MHz	dB	30	40	
883 ~ 1000MHz	dB	45	50	

C. TEST CIRCUIT:

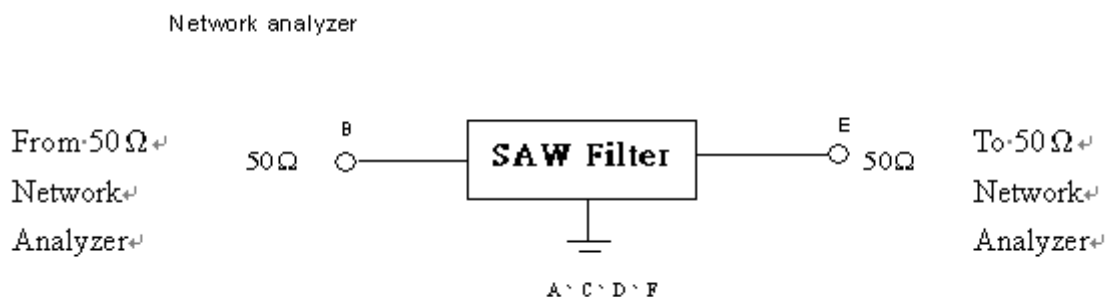


SAW Filter 869.2250MHz
Part No: MP07119

Model: TA1912A
Rev No: 2

D. FREQUENCY CHARACTERISTICS:

1. S21 response: (span 150MHz)

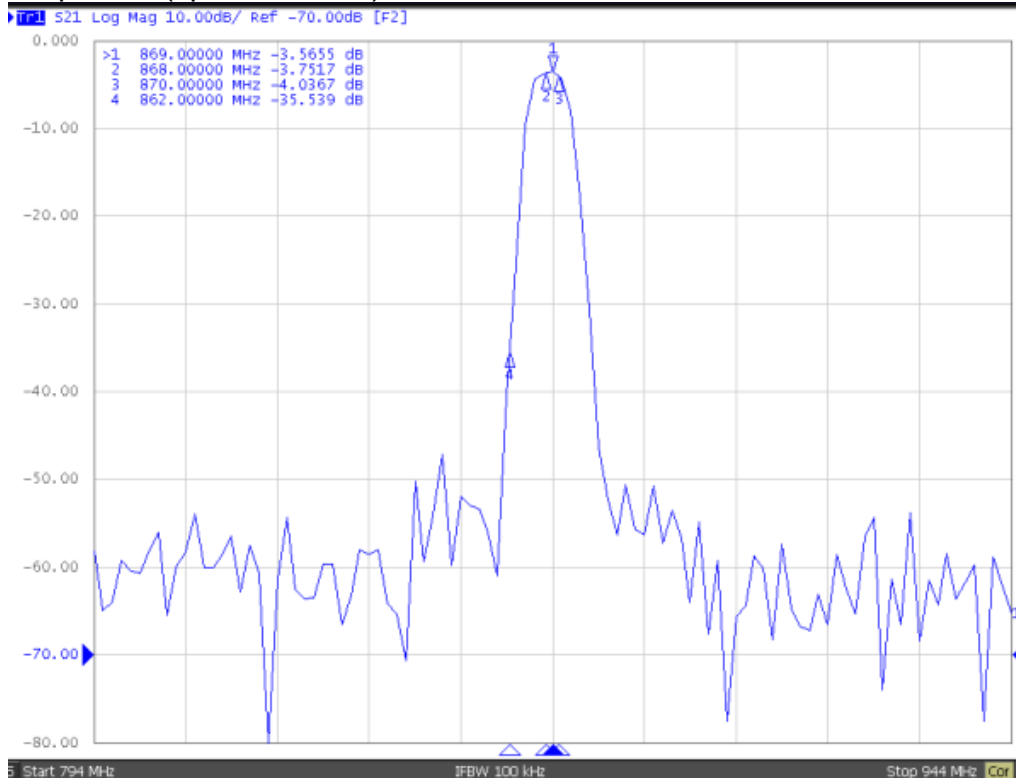


2. S21 response: (span 10MHz)



SAW Filter 869.2250MHz
Part No: MP07119

Model: TA1912A
Rev No: 2



3. S21 response: (span 3GHz)

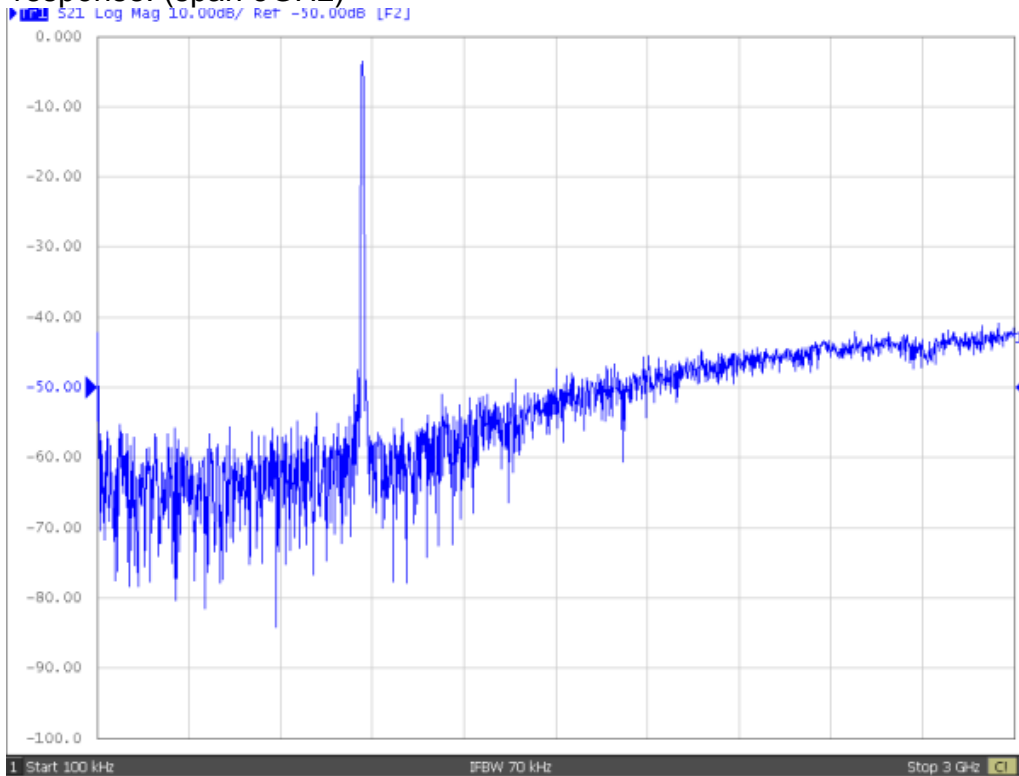

SAW Filter 869.2250MHz
Part No: MP07119

Model: TA1912A
Rev No: 2


4. S11/S22 response:

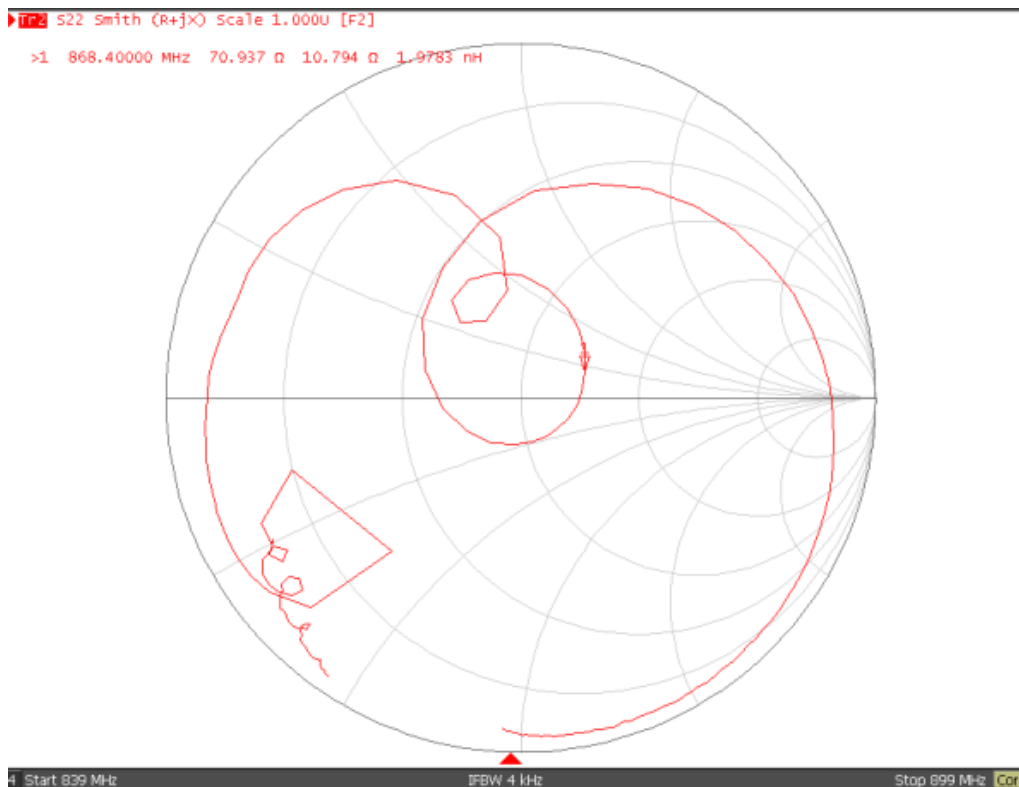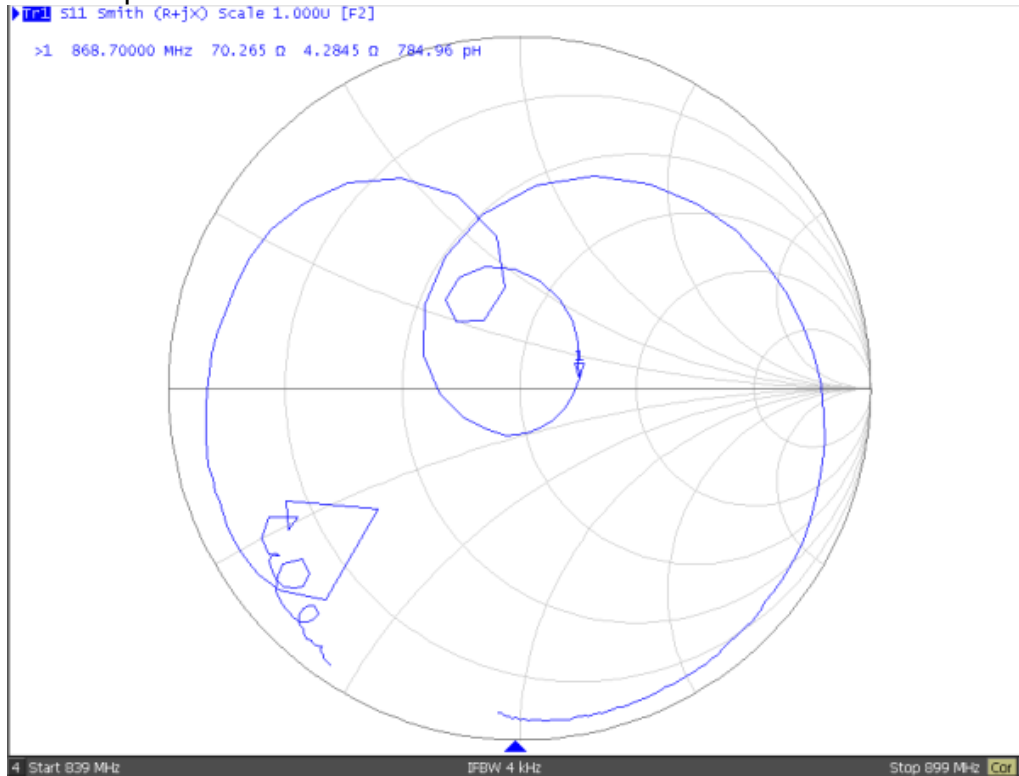

SAW Filter 869.2250MHz
Part No: MP07119

Model: TA1912A
Rev No: 2

E. OUTLINE DRAWING:

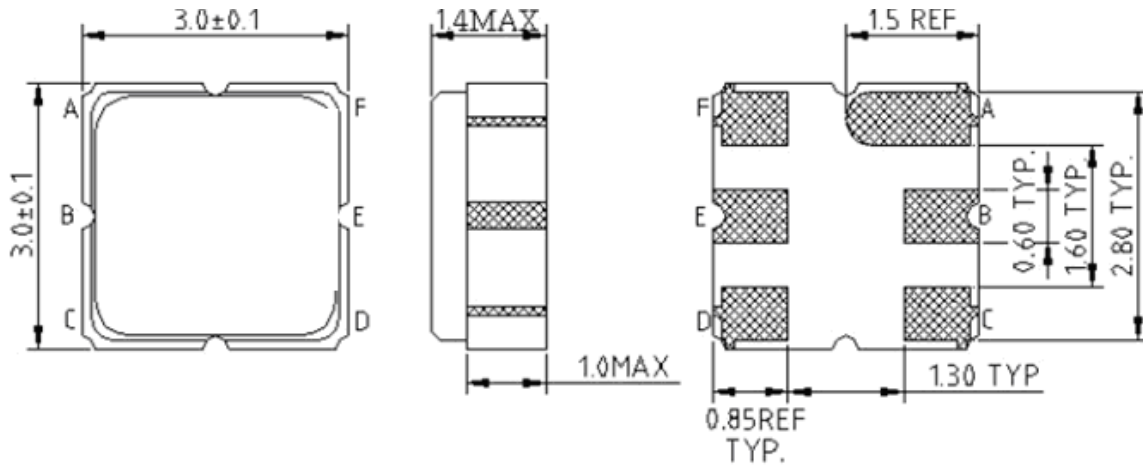


- #B: Input
 - #E: Output
 - # A.C.D.F Ground
 - △: Year code (ex 2008→8)
 - : Date code
- Unit: mm

SAW Filter 869.2250MHz
Part No: MP07119


Model: TA1912A
Rev No: 2

F. PACKING:

1. Reel Dimension

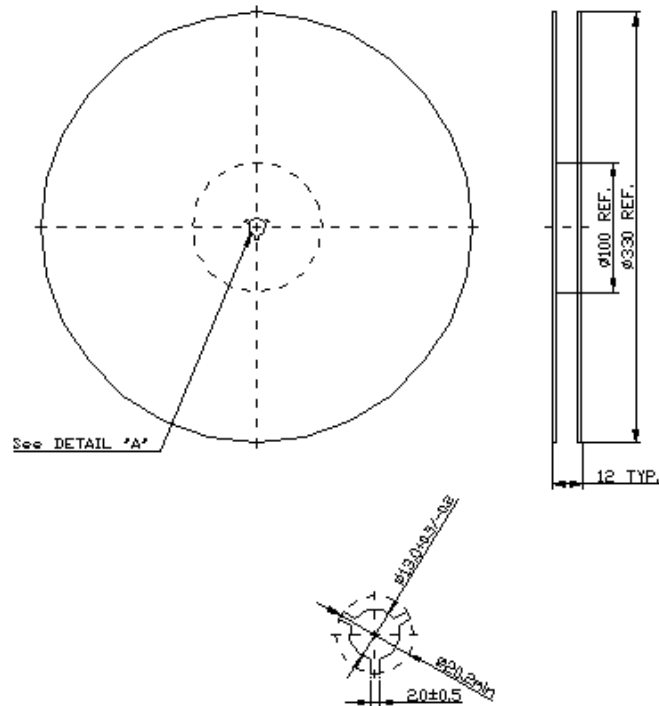

2. Tape Dimension

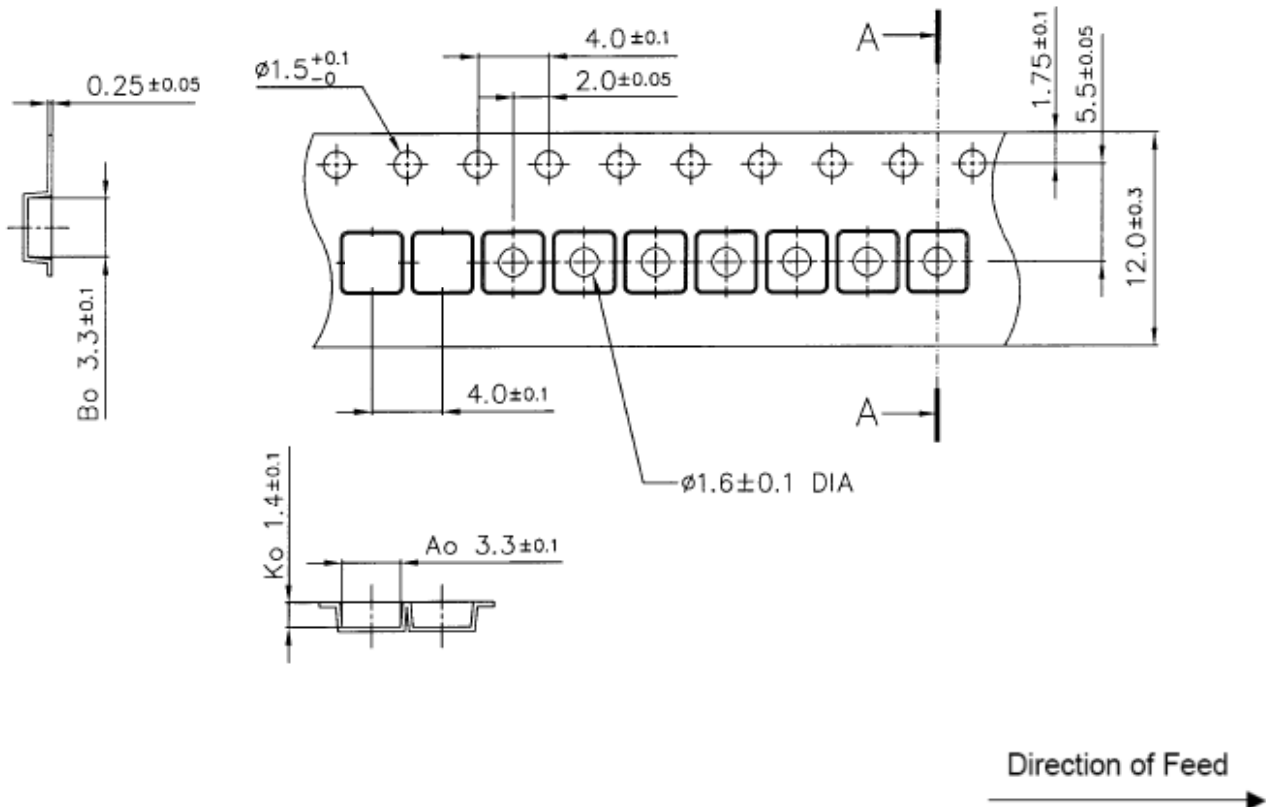

SAW Filter 869.2250MHz
Part No: MP07119

Model: TA1912A
Rev No: 2

G. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150 ~ 180°C for 60 ~ 90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50 ~ 80 seconds and at 260°C +0/-5°C peak (20 ~ 40 sec).
4. Time: 2 times.

