

SAW Filter 423.0MHz
Part No: MP03991

Model: TA1105A
Rev No: 1

A. MAXIMUM RATING:


1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +85°C

B. ELECTRICAL CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	423	-
Insertion Loss (422 ~ 424MHz) IL	dB	-	1.7	3.0
Amplitude Ripple (422 ~ 424MHz)	dB	-	0.2	1.2
VSWR (422 ~ 424MHz)	-	-	1.3	2.2
Attenuation (Reference level from 0dB)				
10 ~ 380MHz	dB	55	70	-
380 ~ 405MHz	dB	45	58	-
440 ~ 450MHz	dB	30	41	-
450 ~ 700MHz	dB	50	58	-
700 ~ 1000MHz	dB	42	53	-

C. MEASUREMENT CIRCUIT:


HP Network analyzer

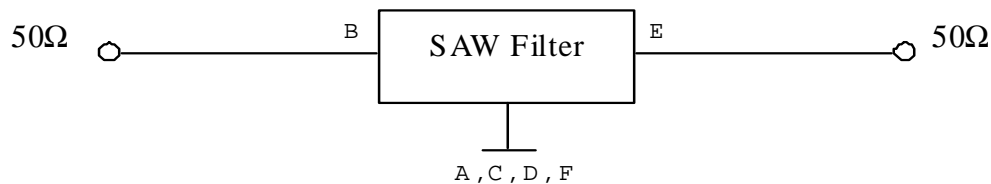


SAW Filter 423.0MHz
Part No: MP03991

Model: TA1105A
Rev No: 1

D. OUTLINE DRAWING:

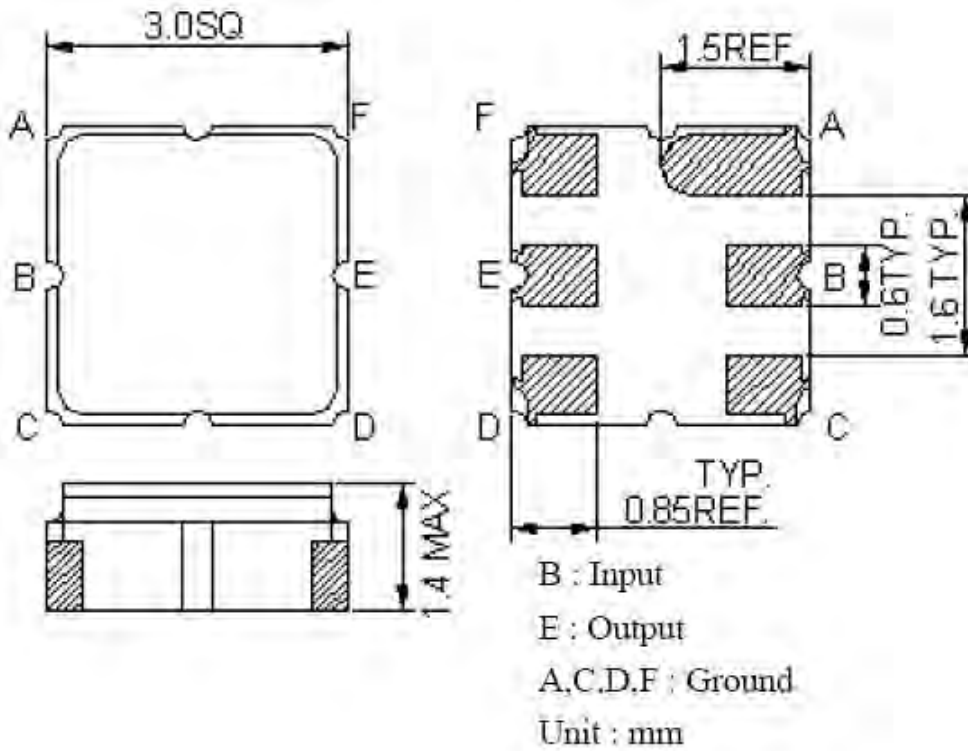



E. PCB FOOTPRINT:

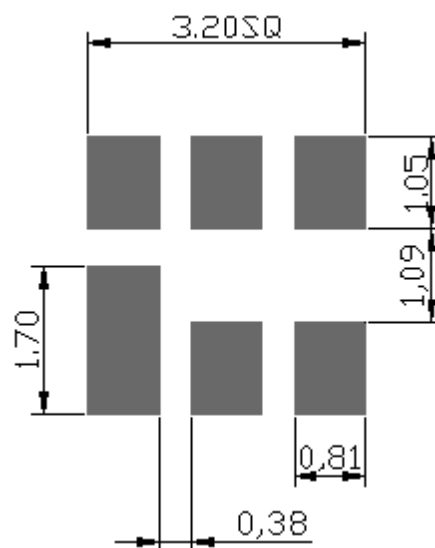

SAW Filter 423.0MHz
Part No: MP03991



Model: TA1105A
Rev No: 1

F. FREQUENCY CHARACTERISTICS:

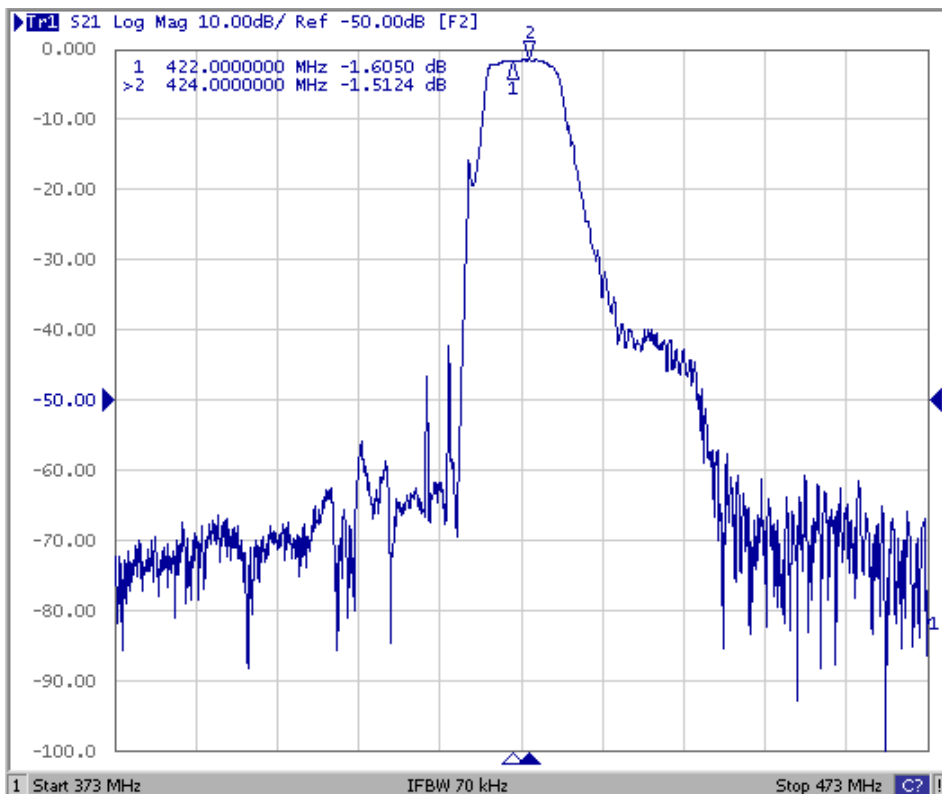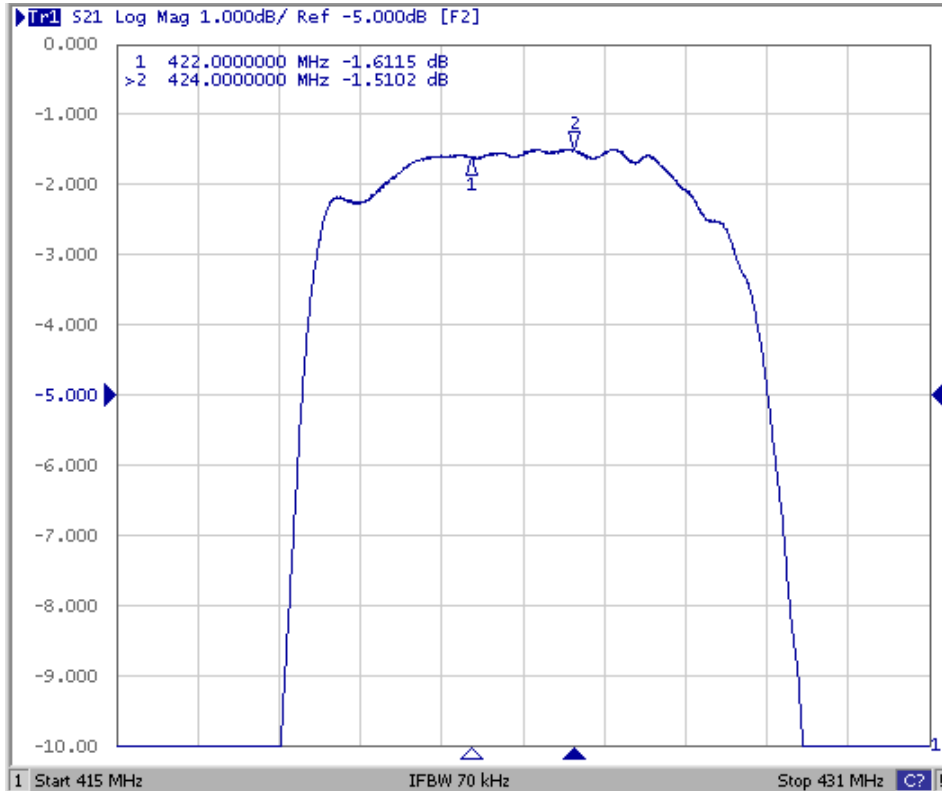


SAW Filter 423.0MHz
Part No: MP03991

Model: TA1105A
Rev No: 1

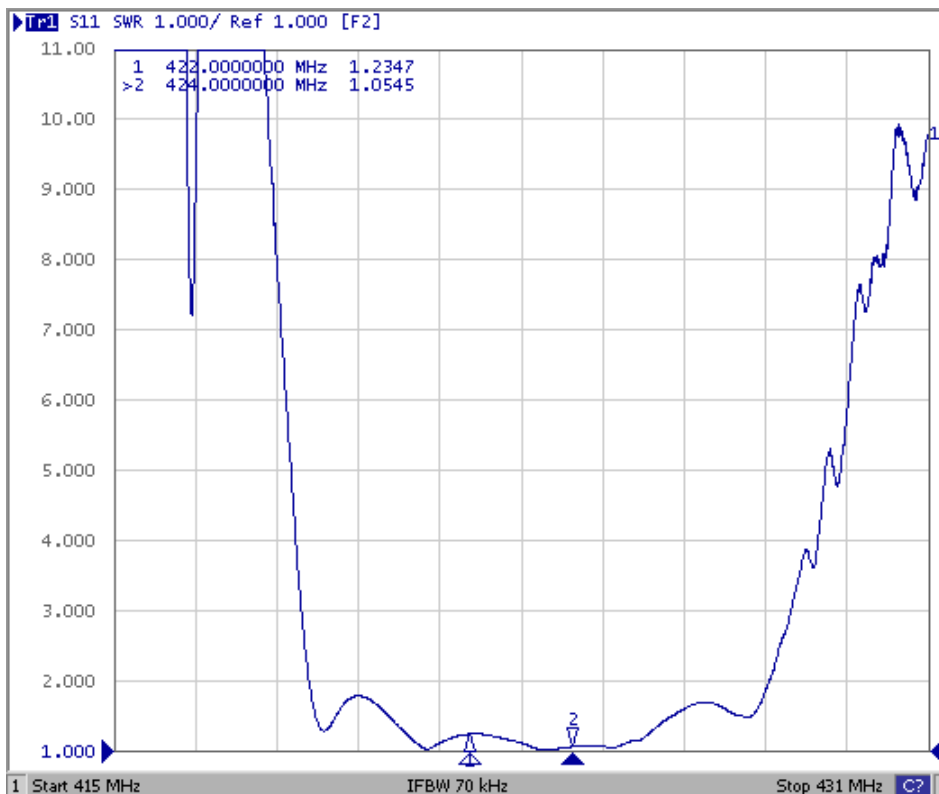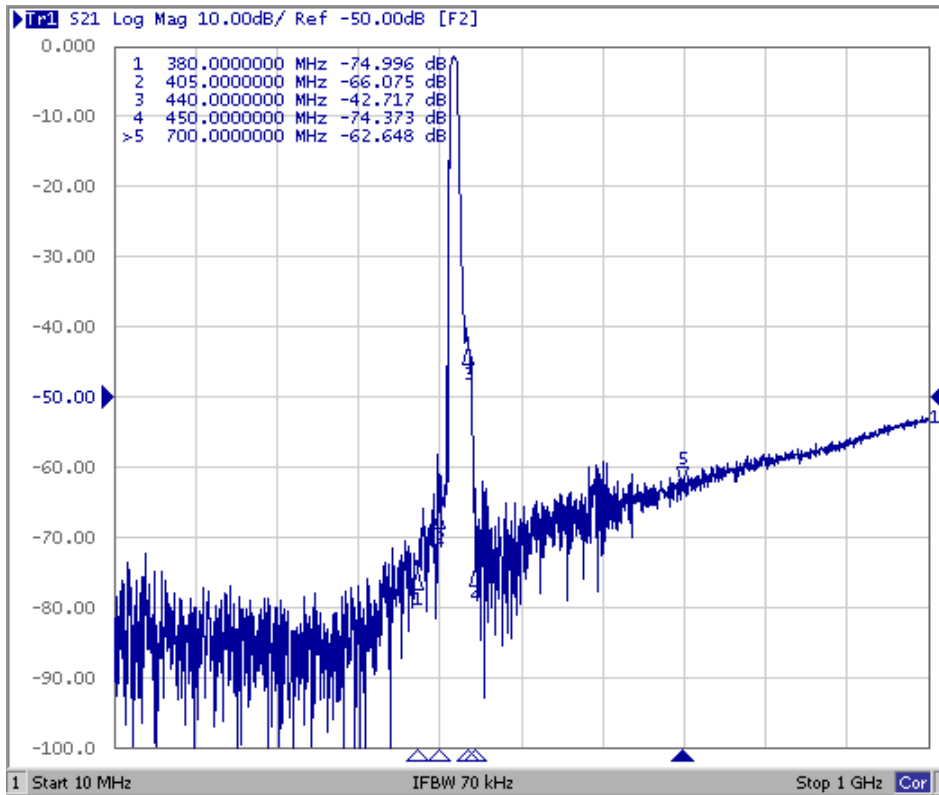

SAW Filter 423.0MHz
Part No: MP03991

Model: TA1105A
Rev No: 1

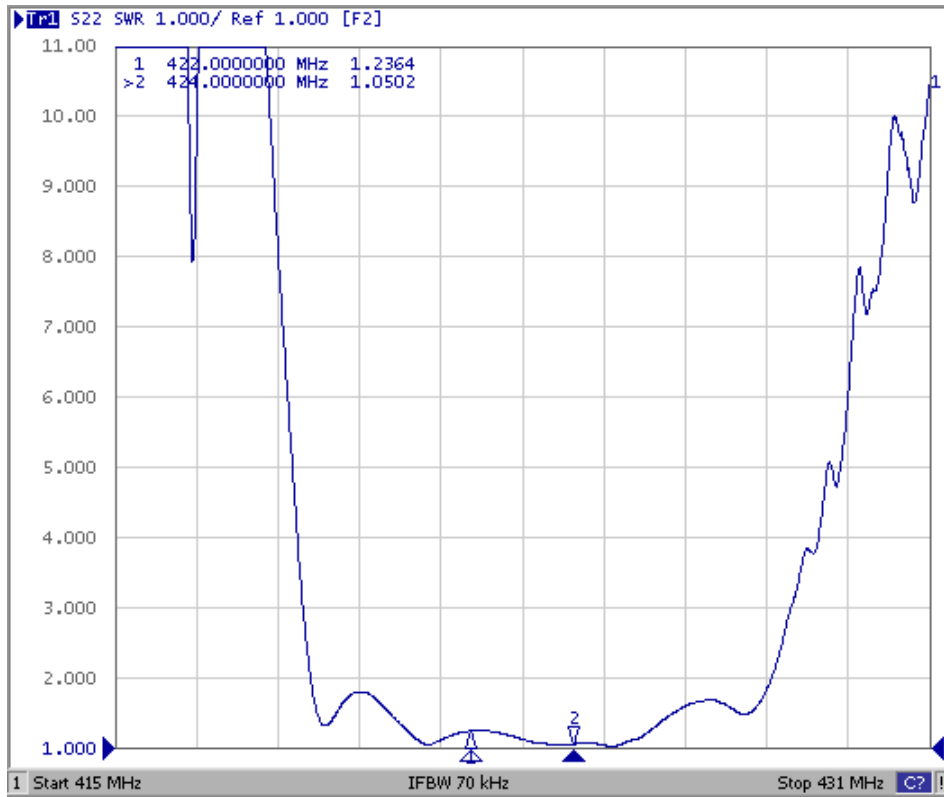


SAW Filter 423.0MHz
Part No: MP03991


Model: TA1105A
Rev No: 1

G. PACKING:

1. Reel Dimension

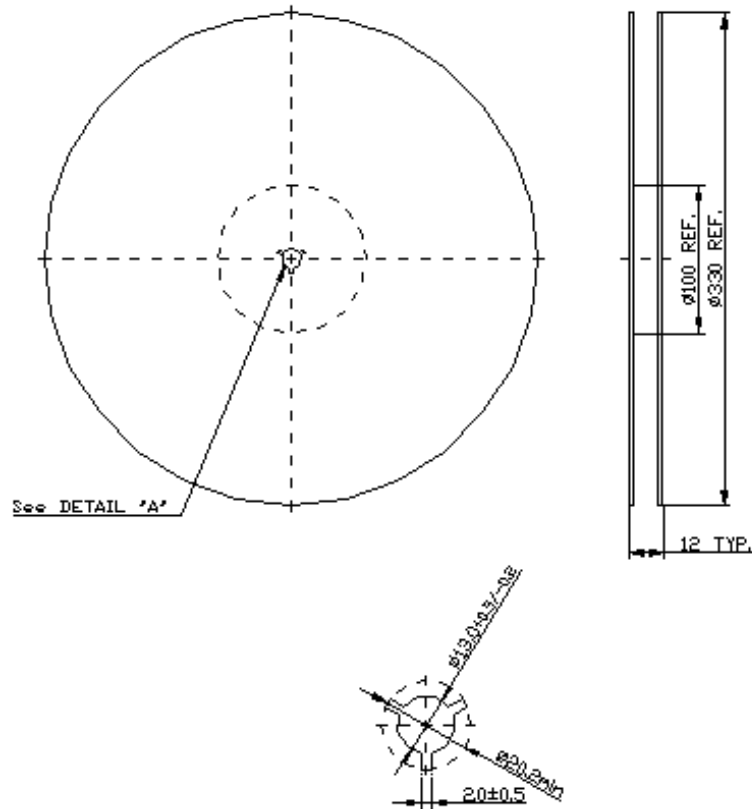

2. Tape Dimension

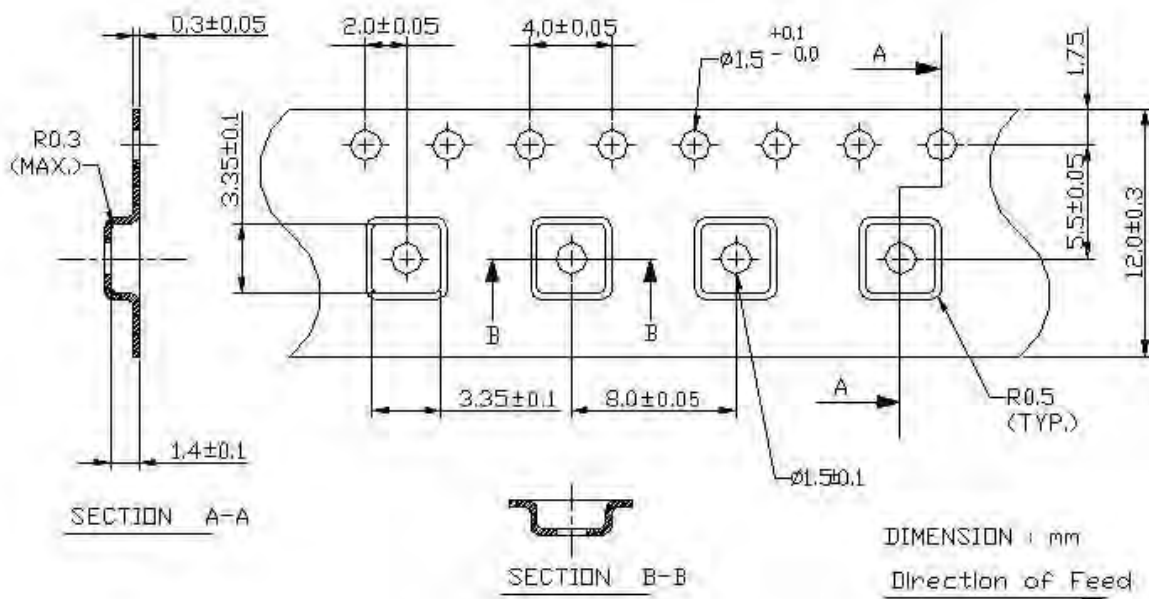

SAW Filter 423.0MHz
Part No: MP03991

Model: TA1105A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

