

SAW Filter 165.740MHz
Part No: MP05756

Model: TB1037A
Rev No: 1

A. MAXIMUM RATING:

Electrostatic Sensitive Device

1. Operating temperature range: -30°C to 65°C
2. Storage temperature range: -40°C to 85°C
3. Input Power Level: 10dBm
4. Maximum DC Voltage: 10V

B. CHARACTERISTICS:

Item	Unit	Min.	Typ.	Max.
Center frequency Fc	MHz	-	165.74	-
Insertion Loss IL	dB	-	11.1	16.0
1dB Band Width	MHz	27	30.7	
Amplitude Ripple Fc ± 12.5MHz	dB	-	0.6	1.0
Attenuation (Reference level from typical Insertion loss)				
50 ~ 143MHz	dB	40	48	
187MHz ~ 800MHz	dB	40	42	
Temperature Coefficient	ppm/°C	-	-94	-
Source Impedance	Ohm	-	50	-
Load Impedance	Ohm	-	50	-

SAW Filter 165.740MHz
Part No: MP05756

Model: TB1037A
Rev No: 1

C. FREQUENCY CHARACTERISTICS:

1. Wide band Response: (span 300MHz)

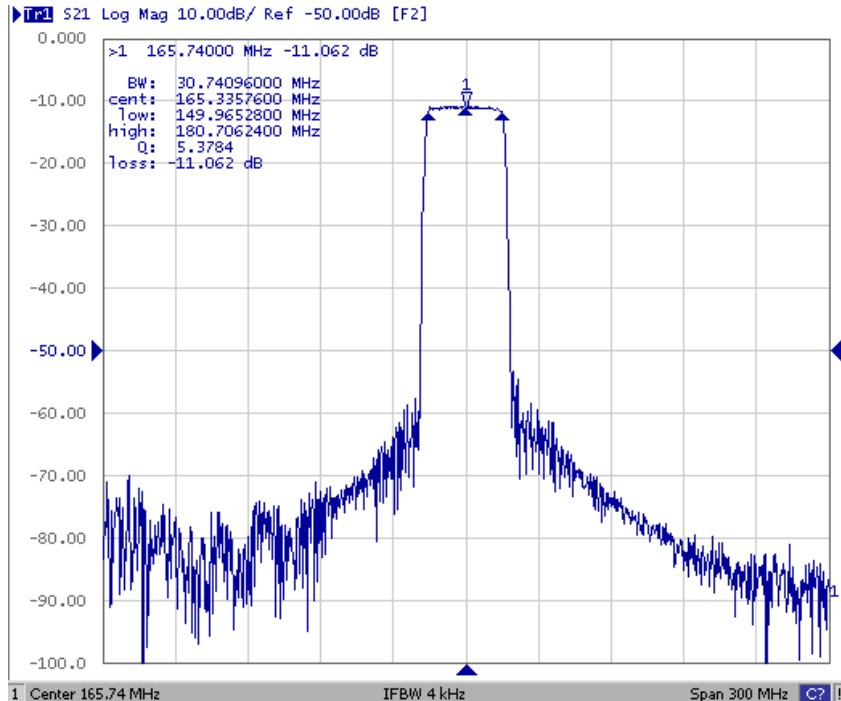


Fig. 1. Horizontal: 30MHz / Div, Vertical: 10dB / Div

2. Pass band Response and Group Time Delay response:


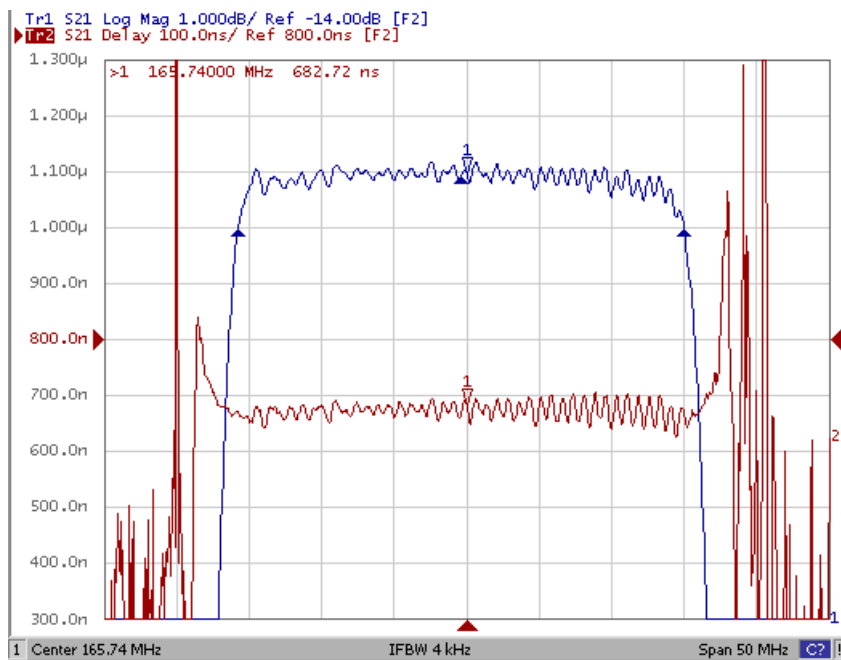


Fig. 2. Horizontal: 5MHz / Div, Vertical: 1dB / Div, Vertical: 100ns / Div

SAW Filter 165.740MHz
Part No: MP05756


Model: TB1037A
Rev No: 1

D. MATCHING CIRCUIT:

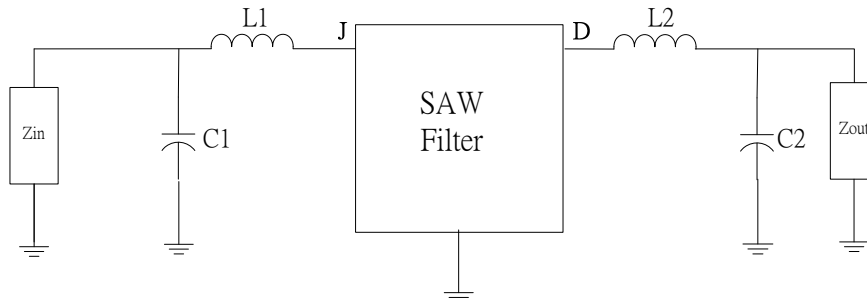


$L1 = 27\text{nH}$ $C1 = 36\text{pF}$ $L2 = 27\text{nH}$ $C2 = 396\text{pF}$

E. OUTLINE DRAWING:

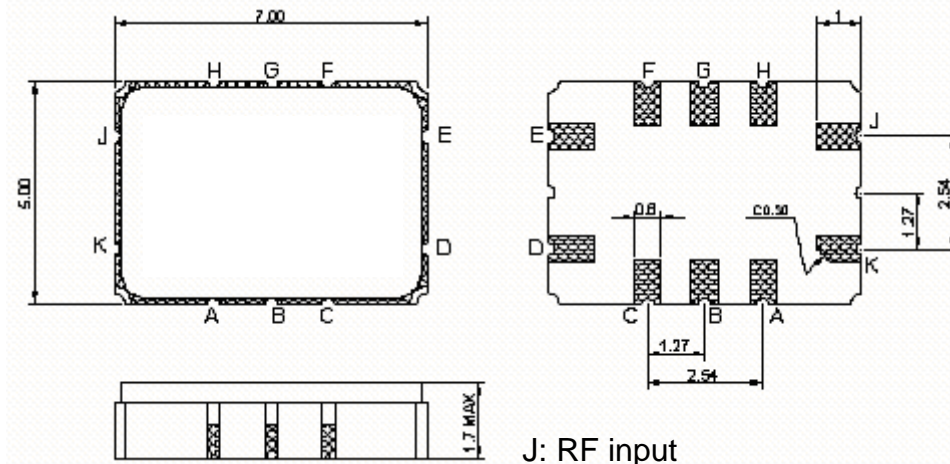

J: RF input
 K: RF input ground
 D: RF output
 E: RF output ground
 A, B, C, F, G, H: Ground
 Unit: mm

F. PCB FOOTPRINT:

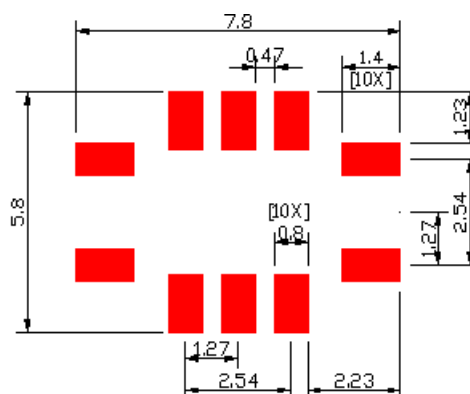


SAW Filter 165.740MHz
Part No: MP05756


Model: TB1037A
Rev No: 1

G. PACKING:

1. Reel Dimension

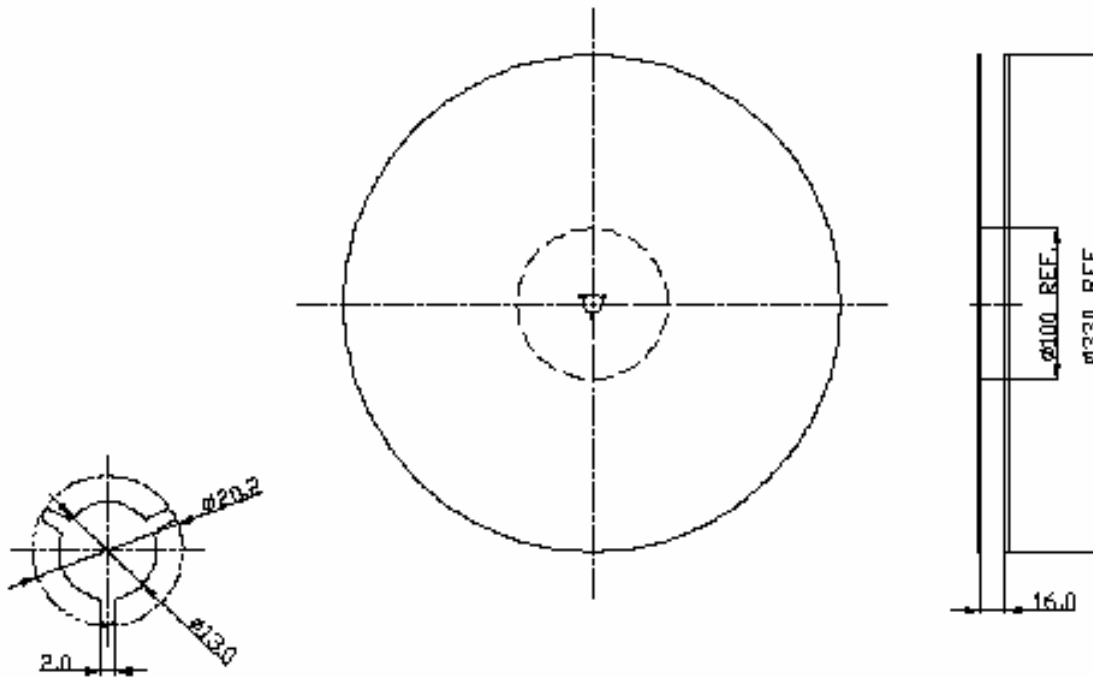

2. Tape Dimension

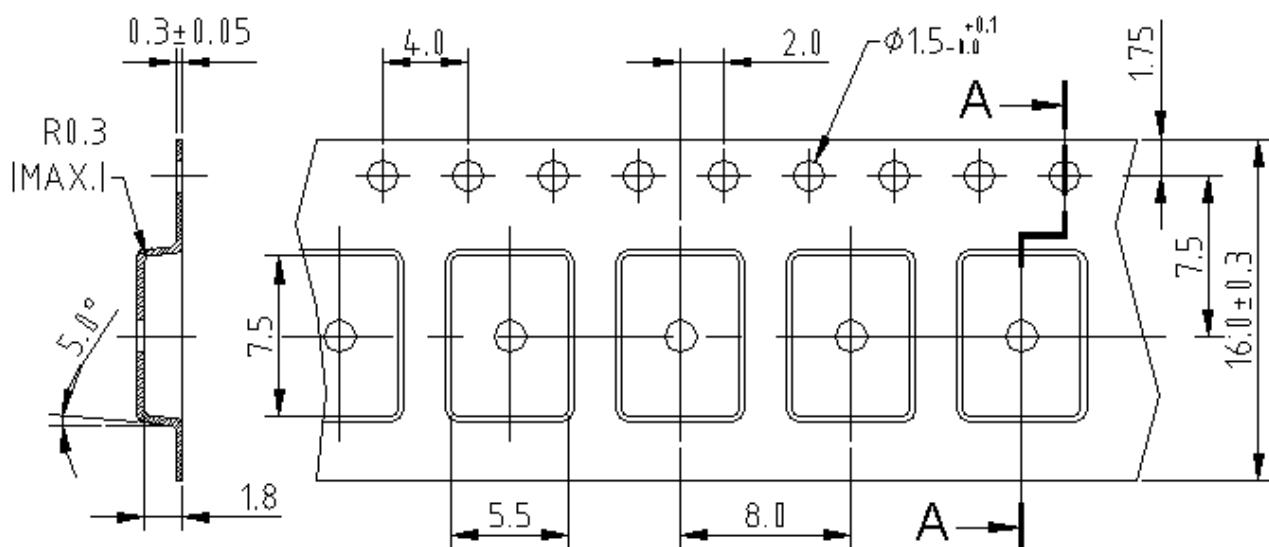

SAW Filter 165.740MHz
Part No: MP05756

Model: TB1037A
Rev No: 1

H. RECOMMENDED REFLOW PROFILE:

