

SAW Filter 1994.60MHz

Model: TA0885C

Part No: MP07945 (AEC-Q200 compliant)

Rev No: 2

A. MAXIMUM RATING:

Electrostatic Sensitive Device (ESD)

1. Input Power Level: 10dBm
2. DC Voltage: 3V
3. Operating Temperature: -40°C to +85°C
4. Storage Temperature: -40°C to +125°C

B. ELECTRICAL CHARACTERISTICS:

1. Terminating source impedance (differential): $Z_S = 150\Omega // 18nH$
2. Terminating load impedance (differential): $Z_L = 150\Omega // 18nH$

Item	Unit	Min.	Typ.	Max.	Note
Center Frequency Fc	MHz	-	1994.6	-	-
Bandwidth at -2dB	MHz	40	63	-	-
Insertion Loss in 1974.6 ~ 2014.6MHz	dB	-	2.6	5	-
Amplitude ripple (1974.6MHz ~ 2014.6MHz)	dB	-	0.6	2	-
Phase error (1974.6MHz ~ 2014.6MHz) (3)	deg	-	2.7	5	-
Group Delay ripple(1974.6MHz ~ 2014.6MHz)	ns	-	5	25	-
I/O VSWR (1974.6MHz ~ 2014.6MHz)	-	-	1.4	2.5	-
Attenuation (1)					
50 ~ 1912.5MHz	dB	44	49	-	-
2076.7 ~ 2150MHz	dB	44	58	-	-
2150 ~ 4250MHz	dB	38	45	-	-
4250 ~ 6000MHz	dB	30	41	-	-


Notes:

1. The amplitude reference is insertion loss at Fc.
2. The amplitude ripple is defined as the max. level - min. level over any 30MHz block of the given bandwidth.
3. The phase error is measured over any 30MHz block of the given bandwidth.


SAW Filter 1994.60MHz
Part No: MP07945 (AEC-Q200 compliant)

Model: TA0885C
Rev No: 2


C. MEASUREMENT CIRCUIT:

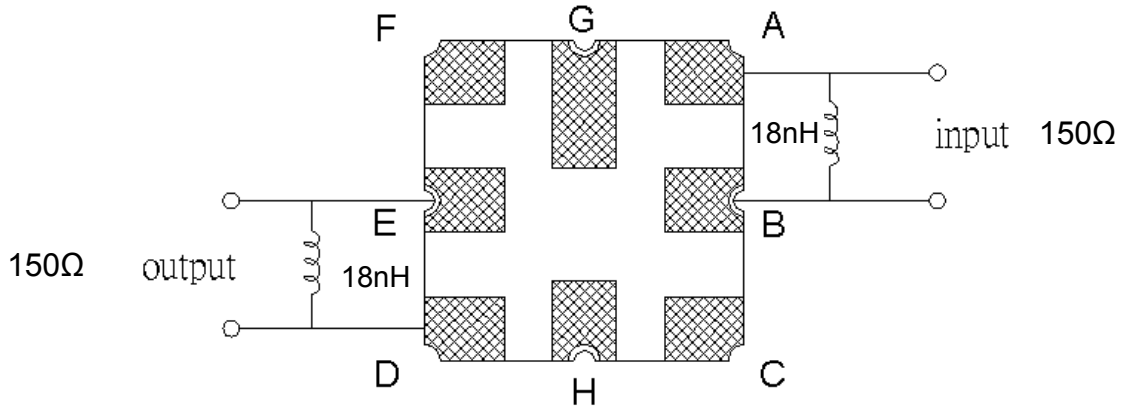

D. OUTLINE DRAWING:

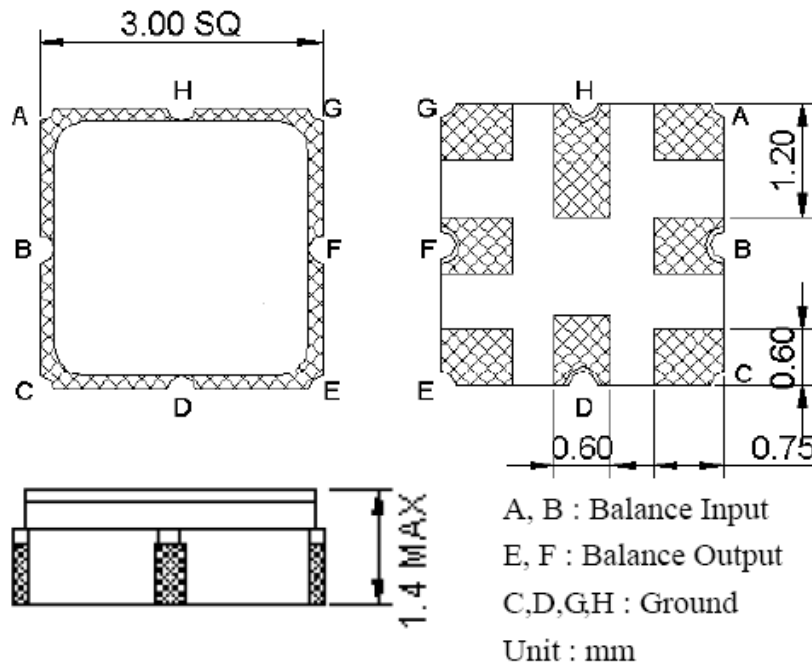


E. PCB FOOTPRINT:

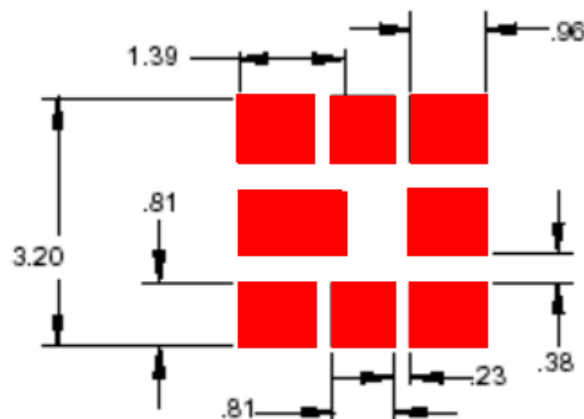

SAW Filter 1994.60MHz
Part No: MP07945 (AEC-Q200 compliant)


Model: TA0885C
Rev No: 2

F. FREQUENCY CHARACTERISTICS:

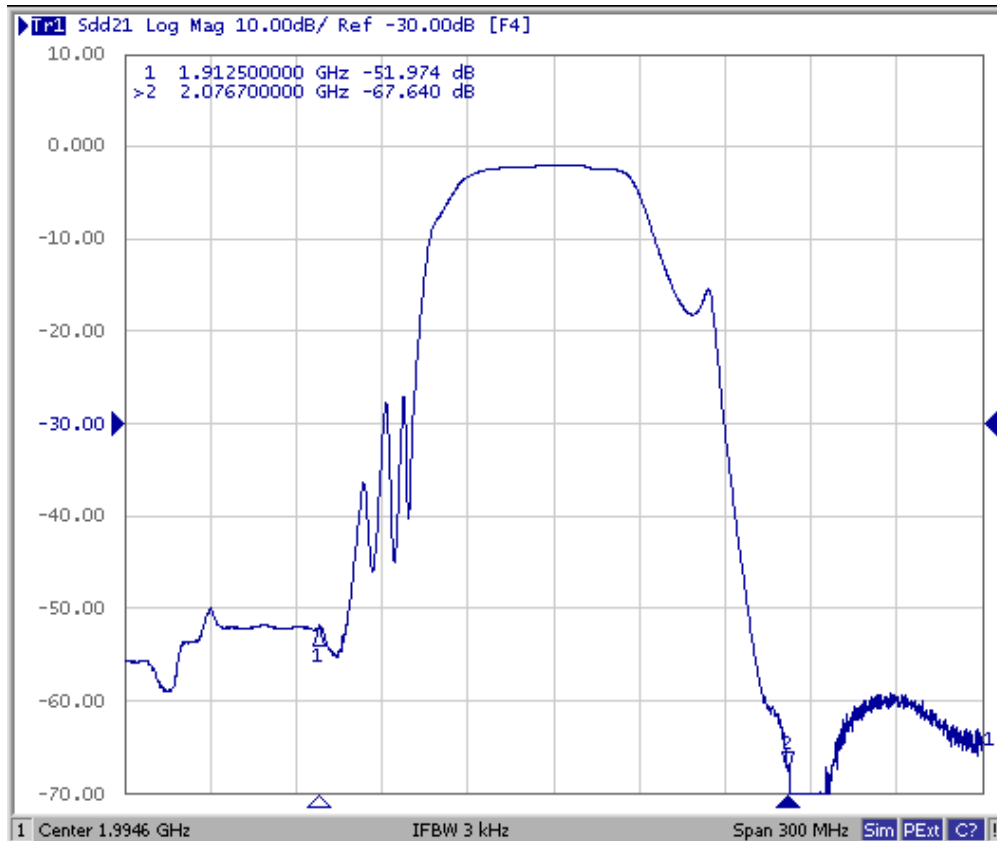

SAW Filter 1994.60MHz
Part No: MP07945 (AEC-Q200 compliant)

Model: TA0885C
Rev No: 2

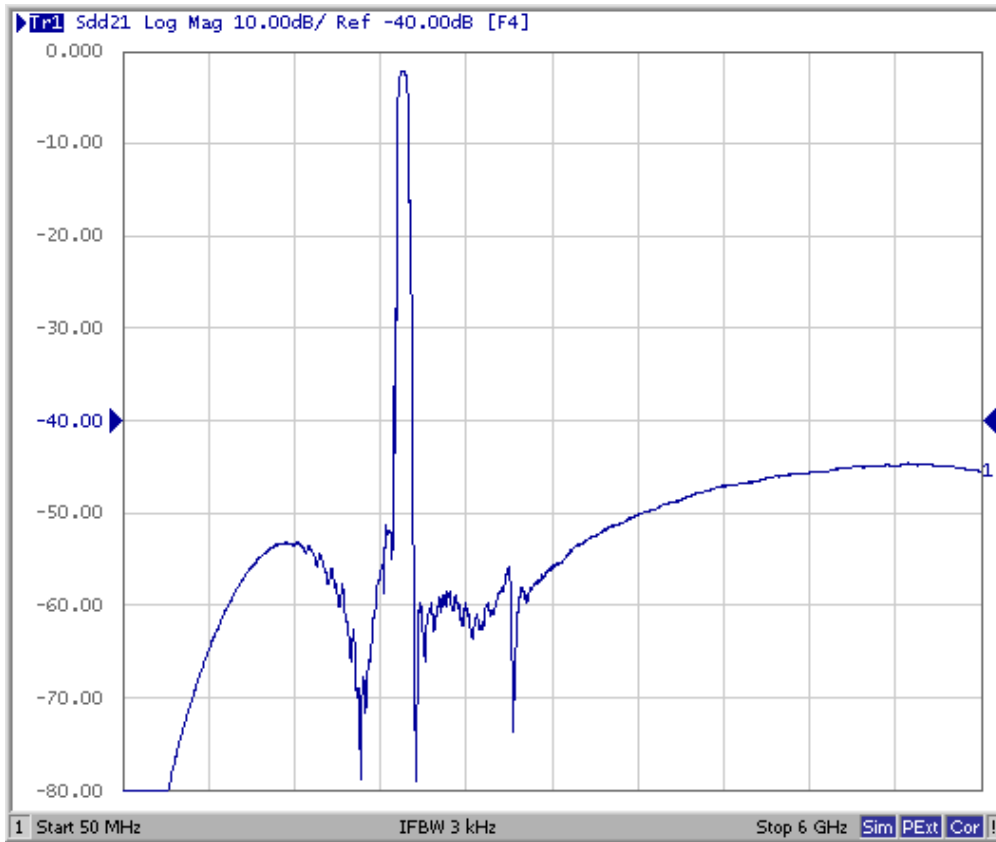


SAW Filter 1994.60MHz
Part No: MP07945 (AEC-Q200 compliant)


Model: TA0885C
Rev No: 2

Reflection Functions

S11

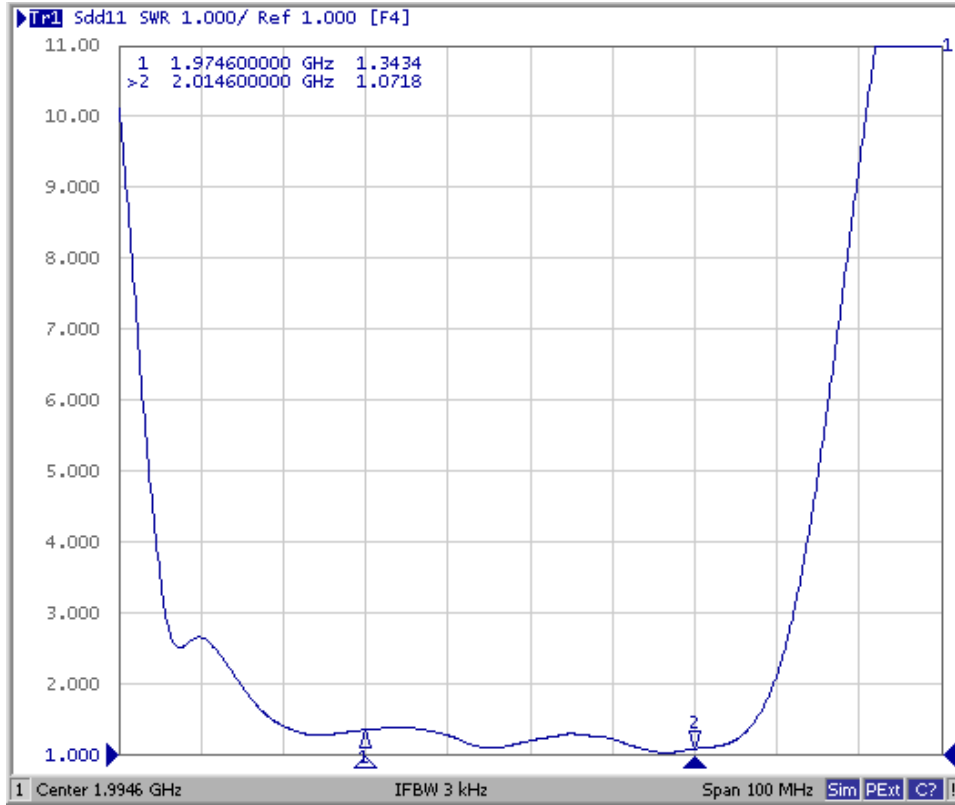

S22

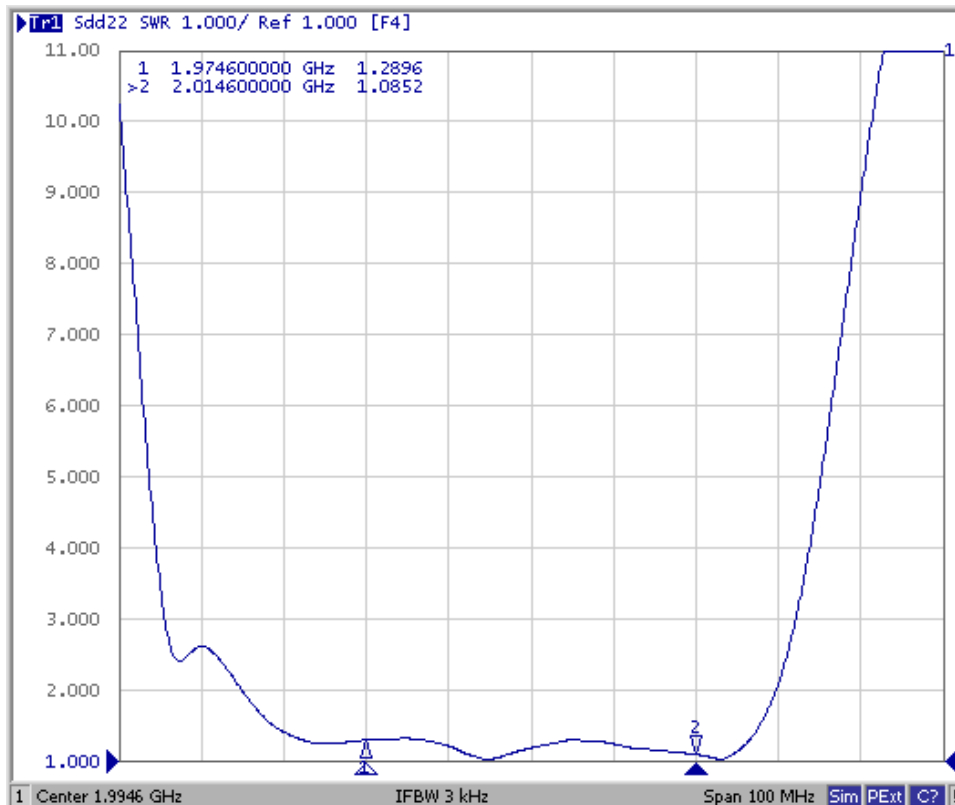

SAW Filter 1994.60MHz
Part No: MP07945 (AEC-Q200 compliant)

Model: TA0885C
Rev No: 2

H. RECOMMENDED REFLOW PROFILE:

1. Preheating shall be fixed at 150 ~ 180°C for 60 ~ 90 seconds.
2. Ascending time to preheating temperature 150°C shall be 30 seconds min.
3. Heating shall be fixed at 220°C for 50 ~ 80 seconds and at 260°C +0/-5°C peak (20 ~ 40 sec).
4. Time: 2 times.

