


# GMCF-10 10G20A

10.7MHz 2 pole crystal filter with  
20.0kHz 3dB bandwidth

- Comprehensive stocks
- Custom specifications available

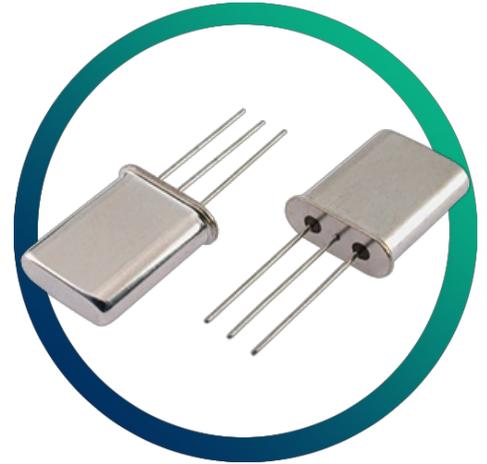

## CONFIGURABLE OPTIONS

| Parameter | Option Code |
|-----------|-------------|
|-----------|-------------|


The GMCF-10 10G20A has no configurable options.

Please see the specifications table for more details or contact our team today if you have other specification requirements.

## SPECIFICATIONS

|                             |  |
|-----------------------------|--|
| Centre frequency            | 10.7MHz  |
| Dimensions                  | 11.05 x 4.65 x 13.46mm                                 |
| Operating temperature range | -20 to +70°C   |
| Number of poles             | 2  |
| Pass band                   | -3dB @ ±10.0kHz min                                    |
| Attenuation band            | -18dB @ ±34.0kHz max                                   |
| In-band ripple              | 0.5dB max  |
| Insertion loss              | 1.5dB max  |
| Guaranteed attenuation      | -35dB max +300 ~ +1000kHz<br>-40dB max -200 ~ -1000kHz |
| Termination                 | 3900Ω // 1.0pF   |
| Package style               | HC49/3L  |

## PACKAGE DRAWING

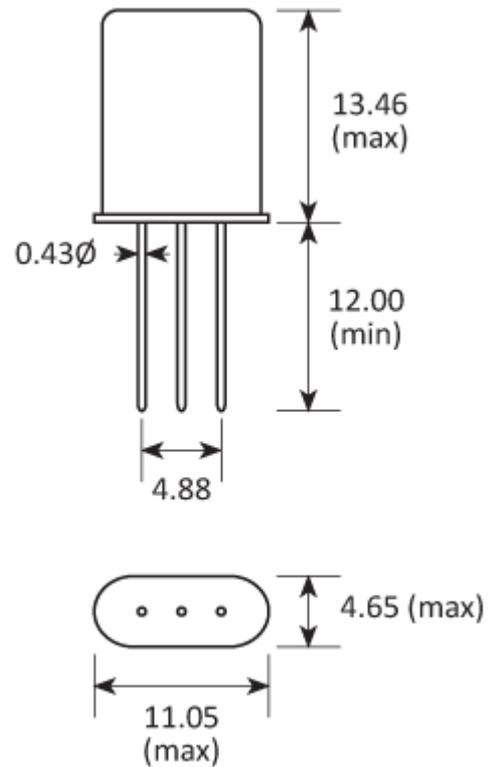

Dimensions in mm

## ORDERING INFORMATION

To request a quotation for the GMCF-10 10G20A please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at [sales@golledge.com](mailto:sales@golledge.com).

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

## HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

**CONSTRUCTION**

Resistance weld

**COMPLIANCE**

Lead-free (&lt; 0.1% by weight )

RoHS compliant with no exemptions. [See our declaration](#)REACH compliant. [See our statement](#)Free of conflict minerals. [See our declaration](#)Free of Halogens. [See our declaration](#)Free of Ozone-depleting substances. [See our declaration](#)