GRX-530

Miniature Automotive Surface Mount Crystal (AEC-Q200)

- AEC-Q200 qualified for automotive applications
- Vacuum seal for excellent long-term stability
- High reliability at low cost
- Metal lid can be grounded to minimise EMI




CONFIGURABLE OPTIONS	
Parameter	Option Code
Frequency	
Calibration tolerance	
Any	
±10ppm	1
±15ppm	Р
±20ppm	2
Temperature stability	
Any	
±15ppm	Р
±20ppm	2
±50ppm	5
±100ppm	С
Operating temperature range	
Any	
-40 to +85°C	4
-40 to +125°C	А
Circuit condition	
Any	
10pF	А
12pF	В
16pF	D
20pF	F
Oscillation mode	
Fundamental	F

SPECIFICATIONS

Frequency range	9.80 ~ 40.0MHz
Dimensions	5.0 x 3.2 x 0.9mm
Storage temperature range	-40 to +125°C
Static capacitance (C ₀)	5pF max
Equivalent series	60Ω max (9.80 ~ 10.99MHz)
resistance	50Ω max (11.0 ~ 11.99MHz)
	40Ω max (12.0 ~ 24.99MHz)
	30Ω max (25.0 ~ 40.0MHz)
Ageing	±3ppm max first year
Test drive level	10μW typ, 100μW max
Soldering condition	260°C, 10 sec x2 max
Qualification	AEC-Q200 (Automotive)

PACKAGE DRAWING

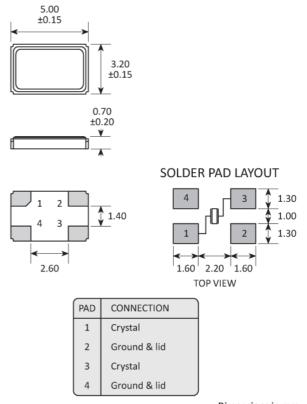

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GRX-530 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

APPLICATIONS

Vehicle telematics Connected car Remote keyless entry (RKE) Audio (DAB/Bluetooth) Camera

MARKING


FREQUENCY S DC

Marking type: Laser


DC = Date Code in YM, eg. "GF" = Jun 2017

	Α	В	С	D	Ε	F	G	Н	J	K	L	М
Υ	1	2	3	4	5	6	7	8	9	0		
M	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

SOLDERING PROFILE



TAPE & REEL SPECIFICATION



Dimensions in mm

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)




Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Ceramic body with gold-plated pads Metal lid, seam sealed

COMPLIANCE





REACH compliant. See our statement





