


GTXO-76V

Sinewave VCTCXO High Precision High Temperature Tristate

- High Precision $\pm 0.05\text{ppm}$
- High Temperature Operation $+105^\circ\text{C}$
- Clipped sine output
- Tri-state function

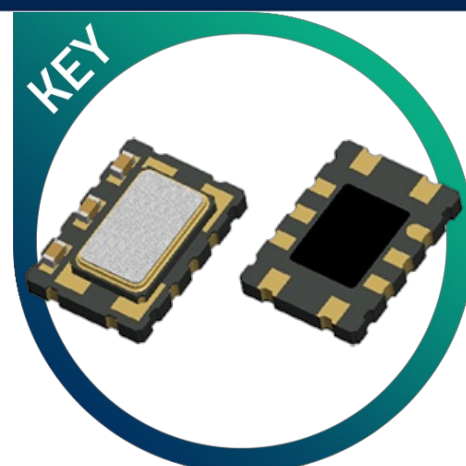

CONFIGURABLE OPTIONS


Parameter	Option Code
Frequency	
Frequency stability	
Any	
$\pm 0.05\text{ppm}$	A
$\pm 0.1\text{ppm}$	B
$\pm 0.2\text{ppm}$	P
$\pm 0.28\text{ppm}$	D
$\pm 0.5\text{ppm}$	E
$\pm 1.0\text{ppm}$	F
Temperature range	
Any	
-20 to $+70^\circ\text{C}$	N
-40 to $+85^\circ\text{C}$	I
-40 to $+95^\circ\text{C}$	E
-40 to $+105^\circ\text{C}$	D
Supply voltage (V_{DD})	
Any	
$+3.3\text{V} \pm 5\%$	L
$+2.5\text{V} \pm 5\%$	J

***Some combinations of frequency stability and wide temperature ranges may not be available. Our team will advise accordingly if this affects your enquiry.**

SPECIFICATIONS


Frequency range	10.0 ~ 52.0MHz
Dimensions	7.0 x 5.0 x 2.10
Storage temperature range	-55 to +125 °C
Supply voltage stability	±0.1ppm, $V_{DD} \pm 5\%$
Load stability	±0.05ppm, $Z_L \pm 10\%$
Ageing	±1.0ppm max first year
Supply current	5.0mA max
Output waveform	Clipped sine, 0.8V p-p min, +DC offset
Start up time	5ms max
Frequency adjustment	±5ppm min, +1.5V ±1.0V
Phase noise (typ @ 20.0MHz)	-130dBc/Hz @ 100Hz -148dBc/Hz @ 1kHz -156dBc/Hz @ 10kHz
Frequency Tolerance @25 °C	±1.5ppm max, 60 mins after reflow

PACKAGE DRAWING



NOTE: To ensure optimal oscillator performance, place a by-pass capacitor of 0.1μF as close to the part as possible between Vdd and GND pads.

SOLDER PAD LAYOUT

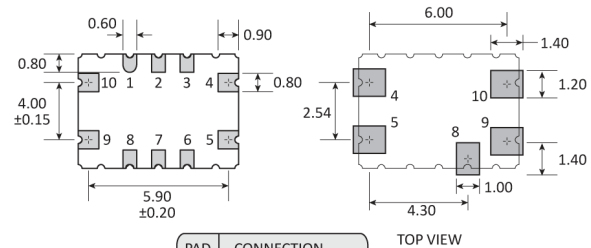

TOP VIEW

PAD	CONNECTION
1	Do not connect
2	Not connected
3	Not connected
4	Ground
5	Output
6	Do not connect
7	Not connected
8	Enable / disable
9	Supply (Vdd)
10	Freq adjustment

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GTXO-76V please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Once we've received your request our expert team will then produce a quotation tailored to meet your needs using the option codes you've selected.


Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

MARKING


FREQUENCY • DC	• Pin 1 Marking type: Laser DC = Date code
---	--

SOLDERING PROFILE

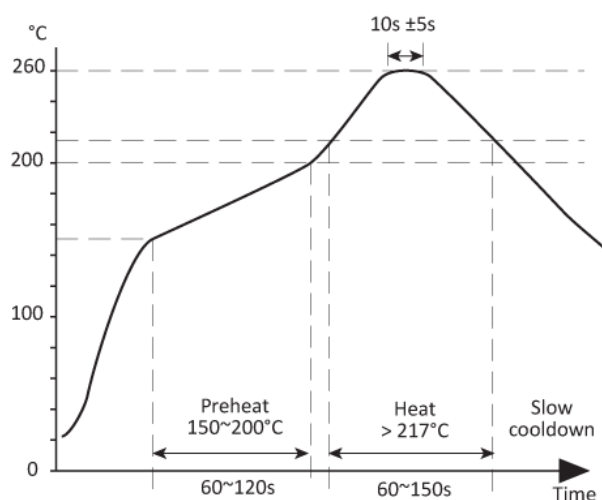

Lead free solderability limits: 260°C ± 5°C x 10s ± 5s x 2.

TAPE & REEL SPECIFICATION

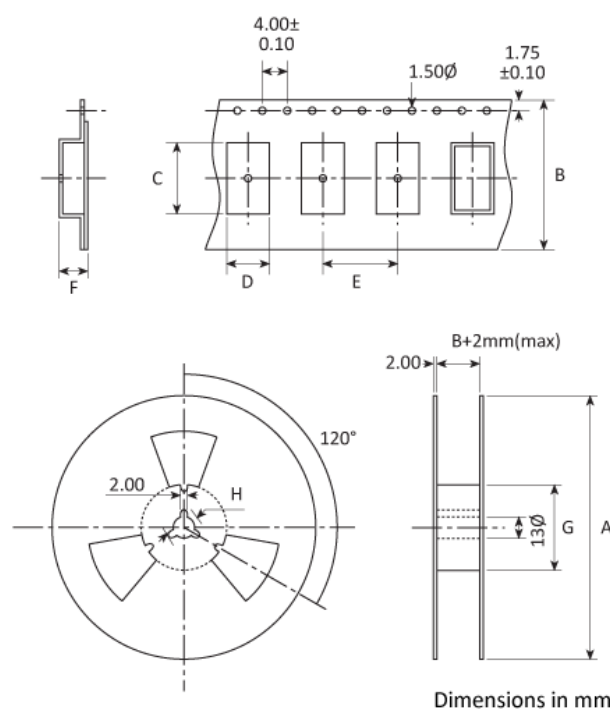

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)