

# GTXO-C14V

## 3.3 & 5.0V Stratum 3 VCTCXO with CMOS Output



- Ideally suited for Telecoms applications
- 3.3V or 5.0V supply voltage
- CMOS output
- Stratum 3 compliant models available
- $\pm 4.6$ ppm stability over 20 years

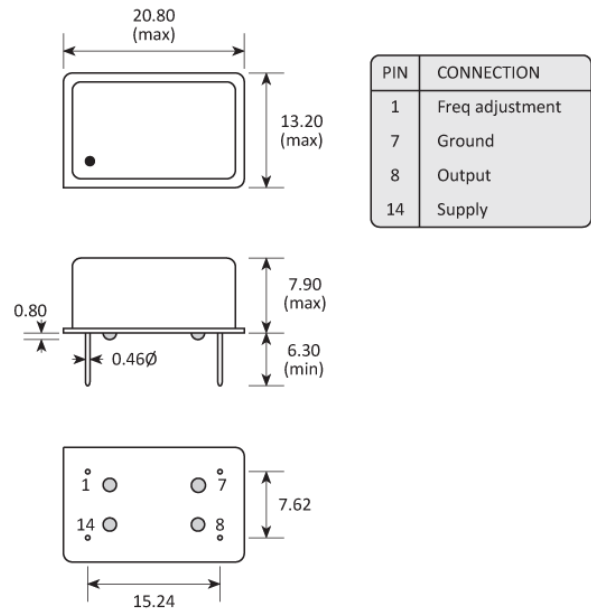
### CONFIGURABLE OPTIONS

Parameter	Option Code
Frequency	
Temperature stability	
Any	
$\pm 0.28$ ppm (up to 50.0MHz)	D
$\pm 0.5$ ppm (up to 100MHz)	E
$\pm 1.0$ ppm (up to 100MHz)	F
Supply voltage ( $V_{DD}$ )	
Any	
+3.3V ( $\pm 5\%$ )	L
+5.0V ( $\pm 5\%$ )	P
Temperature range	
Any	
-20 to +70 °C	
-40 to +85 °C	I

**SPECIFICATIONS**

Frequency range	1.0 ~ 100MHz
Dimensions	20.8 x 13.2 x 7.9mm
Frequency calibration	±1.0ppm (@ +25 °C)
Frequency stability	±4.6ppm
* see note below	
Holdover stability (option D only)	±0.32ppm max over 24hrs
Temperature hysteresis	±0.4ppm max
Storage temperature range	-55 to +125 °C
Frequency vs supply voltage	±50ppb, $V_{DD} \pm 5\%$
Frequency vs load change	±50ppb, $Z_L \pm 5\%$
Ageing	±3.0ppm max 20 years
Short term ageing (option D only)	±40ppb per day, $\pm 4.63 \times 10^{-13}$ per sec
Supply current	2.1mA typ, 6.0mA max ( $\leq 52.0$ MHz) 12.0mA max ( $> 52.0$ MHz)
Driving ability	15pF CMOS
Logic levels	'1' level = 90% $V_{DD}$ min '0' level = 10% $V_{DD}$ max
Start up time	1.0ms max
Frequency adjustment	±10ppm min 50% $V_{DD}$ ±40% $V_{DD}$
±5% linearity, positive slope	
Phase noise (typ @ 19.44MHz)	-90dBc/Hz @ 10Hz -120dBc/Hz @ 100Hz -140dBc/Hz @ 1kHz -150dBc/Hz @ 10kHz -152dBc/Hz @ 100kHz
Period jitter RMS	3ps typ, 5ps max
Phase jitter RMS	0.5ps typ, 1.0ps max, 12kHz- $f_o/2$

\* **Stability is inclusive of calibration, temperature, voltage, load, 20years ageing, shock & vibration**

**PACKAGE DRAWING**


Dimensions in mm

## ORDERING INFORMATION

---

To request a quotation for the GTXO-C14V please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at [sales@golledge.com](mailto:sales@golledge.com).

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

## CONSTRUCTION

---

Hermetically sealed DIL-14 package

## HANDLING & STORAGE

---



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

## COMPLIANCE

---



Lead-free (< 0.1% by weight )



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)