


GXO-2201G

1.8V CMOS Oscillator with Low Jitter

- Competitive pricing for high volumes
- Miniature ceramic package with metal lid
- Low voltage supply
- Enable / disable tristate function

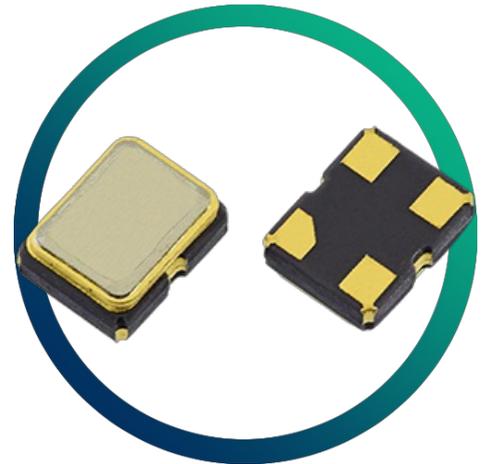

CONFIGURABLE OPTIONS




Parameter	Option Code
Frequency	
Frequency stability * see note below	
Any	
±50ppm	B
±25ppm	A

* Frequency stability is inclusive of calibration @ 25°C, operating temperature range, supply voltage change and load change.


SPECIFICATIONS

Frequency range	1.50 ~ 54.0MHz
Dimensions	2.0 x 1.6 x 0.85mm
Operating temperature range	-20 to +70°C
Storage temperature range	-40 to +85°C
Supply voltage (V _{DD})	+1.8V (±5%)
Supply current	2.5mA max (< 24.0MHz) 3.5mA max (24.0 ~ 39.9MHz) 4.5mA max (>= 40MHz)
Logic levels	'0' level = 10%V _{DD} max '1' level = 90%V _{DD} min
Start up time	10ms max
Waveform symmetry	45:55 max @ 50%V _{DD}
Driving ability	15pF CMOS
Rise / fall time (10~90%V _{DD})	6.5ns max
Enable / disable function	Tristate (control via pad 1)
Period jitter RMS	5ps max
Phase jitter RMS	1ps max, 12kHz~20MHz
Ageing	±5ppm max 1st year
Net Mass	8.86mg

PACKAGE DRAWING



SOLDER PAD LAYOUT

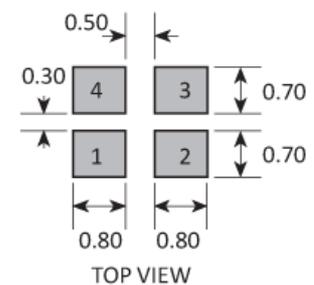

PAD	CONNECTION
1	Enable / disable
2	Ground
3	Output
4	Supply

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the GXO-2201G please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.


Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

ENABLE / DISABLE FUNCTION

Input (pad 1)	Output (pad 3)
Open	Enabled
'1' level	Enabled
'0' level	High Impedance

MARKING




Marking type: Laser


DC = Date Code in YM, eg. "GF" = Jun 2017

	A	B	C	D	E	F	G	H	J	K	L	M
Y	1	2	3	4	5	6	7	8	9	0		
M	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec

SOLDERING PROFILE

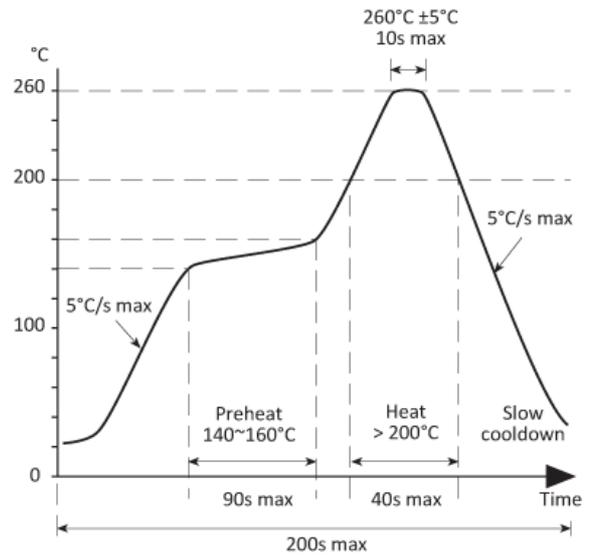

TAPE & REEL SPECIFICATION

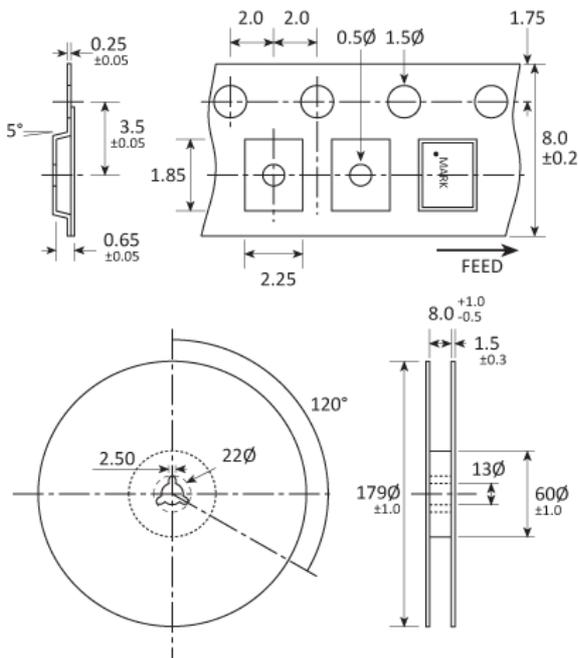

Dimensions in mm

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Ceramic body with gold-plated pads
Metal lid, seam sealed

COMPLIANCE

Please refer to our **DOCUMENTS** section for more information.

 Lead-free (< 0.1% by weight)

 RoHS compliant with no exemptions.

 REACH compliant.

 Free of conflict minerals.

 Free from halogens.

 Free from ozone-depleting substances.