


# MCSO1FV

## 3.3V CMOS Oscillator with Low Jitter

- Low jitter
- Military temperature range -55+125°C option
- Excellent shock & vibration resistance
- Enable / disable tristate option (>500kHz)
- Optional tinned pads (Ag/Cu/Zn)

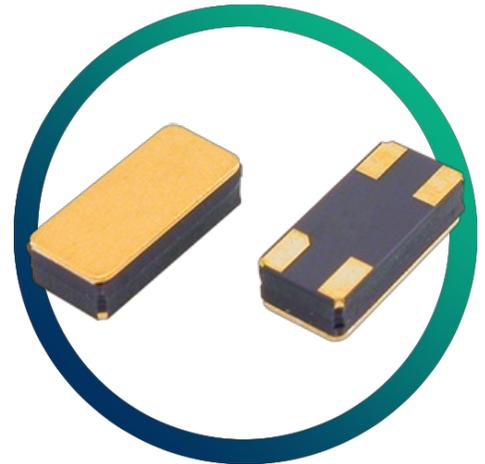


### CONFIGURABLE OPTIONS

Parameter	Option Code
<b>Frequency</b>	
<b>Frequency stability</b>	
* see note below	
Any	
±100ppm	
±50ppm	T
<b>Operating temperature range</b>	
Any	
0 to +70°C	A
-40 to +85°C	B
-55 to +125°C	C
<b>Enable / disable function</b>	
Any	
None (pad 1 NC)	
Tristate* (control via pad 1)	E
* not available under 500kHz	
<b>Terminations</b>	
Any	
Gold plated pads	
Tinned pads (Ag/Cu/Zn)	T

## SPECIFICATIONS

Frequency range	10.0kHz ~ 20.0MHz
Dimensions	7.86 x 3.60 x 2.20mm
Supply voltage ( $V_{DD}$ )	+3.3V ( $\pm 5\%$ )
Storage temperature range	-65 to +125 °C
Supply current	1mA max (@32.768kHz) 4mA max ( $\leq 10$ MHz) 5mA max ( $> 10$ MHz)
Driving ability	CMOS
Load	3pF min, 47pF max
Logic levels	'0' level = +0.4V max '1' level = $V_{DD} - 0.5V$ min
Start up time	5ms max
Waveform symmetry	40:60 max @ 50% $V_{DD}$
Jitter RMS ( $1\sigma$ )	< 2ps
Rise / fall time	7ns max 150ns max @ 32.768kHz
Shock resistance	5,000g, 0.3ms $\frac{1}{2}$ -sine
Vibration resistance	20g rms 10.0 ~ 2,000Hz
Soldering condition	260 °C, 10 sec max

## PACKAGE DRAWING

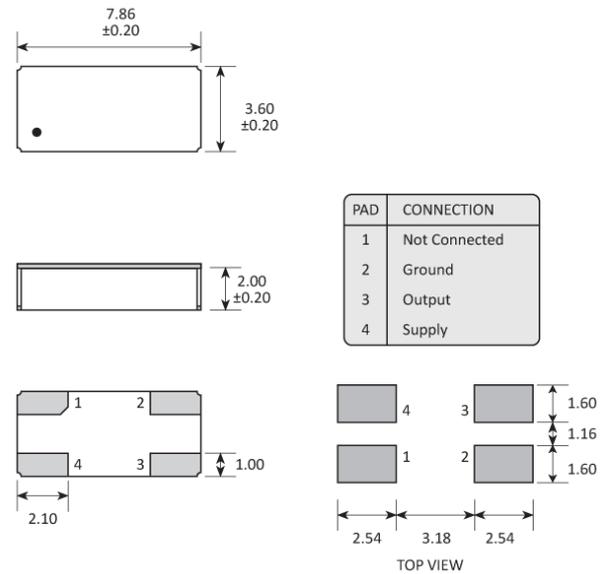

A 47nF ceramic capacitor must be connected between GND and  $V_{DD}$

Dimensions in mm

## ORDERING INFORMATION

To request a quotation for the MCSO1FV please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at [sales@golledge.com](mailto:sales@golledge.com).

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

## ENABLE / DISABLE FUNCTION

Input (pad 1)	Output (pad 3)
Open	Enabled
'1' level	Enabled
'0' level	High Impedance

---

## HANDLING & STORAGE

---



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

---

## CONSTRUCTION

---

Ceramic base with kovar lid

---

## COMPLIANCE

---



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. [See our](#)

[declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our](#)

[declaration](#)