

MCSO2LW

2.5V Low Jitter Oscillator with LVDS

Output

- LVDS output
- Military temperature range -55+125°C option
- Low jitter
- Excellent shock & vibration resistance
- Optional tinned pads (Ag/Cu/Zn)




CONFIGURABLE OPTIONS

Parameter	Option Code
Frequency	
Frequency stability	
* see note below	
Any	
±100ppm	
±50ppm	T
Operating temperature range	
Any	
Any	
0 to +70°C	A
-40 to +85°C	B
-55 to +125°C	C
Enable / disable function	
Any	
None (pad 1 NC)	
Active (control via pad 1)	E
Terminations	
Any	
Gold plated pads	
Tinned Ag/Cu/Zn	T

SPECIFICATIONS

Frequency range	40.0 ~ 130MHz
Dimensions	5.0 x 3.2 x 1.7mm
Supply voltage (V_{DD})	+2.5V ($\pm 5\%$)
Storage temperature range	-65 to +125°C
Supply current	5mA max (@40.0MHz) 10mA max (@100MHz) 20mA max (@130MHz)
Output	LVDS
Output load	100Ω
Logic levels (typ)	'0' level = +1.1V '1' level = +1.4V
Start up time	5ms max
Waveform symmetry	45:55 max @ 50% V_{DD}
Jitter RMS	0.3ps max (1.0kHz ~ 1.0MHz)
Rise / fall time	1ns max (20% - 80%)
Phase noise (typ @ 100MHz)	-70dBc/Hz @ 10Hz -100dBc/Hz @ 100Hz -125dBc/Hz @ 1kHz -145dBc/Hz @ 10kHz -150dBc/Hz @ 100kHz
Shock resistance	5,000g, 0.3ms, ½ sine
Vibration resistance	50g rms 10.0 ~ 2,000Hz
Soldering condition	260°C, 10 sec max

PACKAGE DRAWING

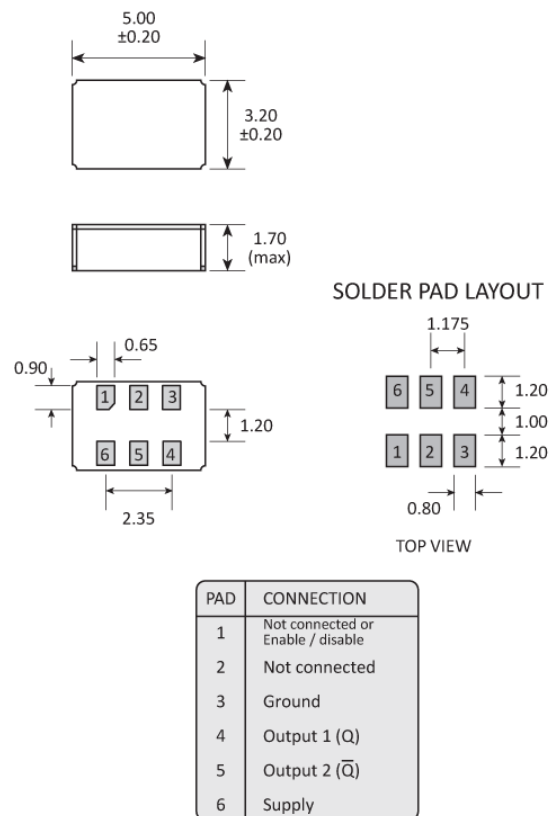

A 47nF ceramic capacitor must be connected between GND and V_{DD}

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the MCSO2LW please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

ENABLE / DISABLE FUNCTION

Input (pad 1)	Output (pads 4 & 5)
Open	Enabled
'1' level	Enabled
'0' level	No clock

Reaction time < 1μs

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Ceramic base and lid

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)