


RV-8263-C7

Low Power I²C bus RTC

- Low Power of just 190nA typ.
- Compliant with I²C-Bus interface (400kHz)
- AEC-Q200 compliant option
- Programmable alarm, timer and offset
- Previously named RV8263C7

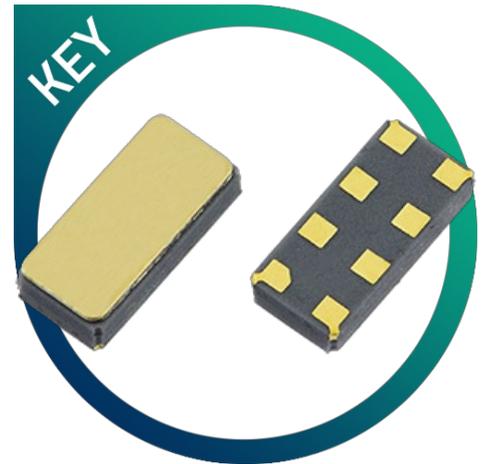


CONFIGURABLE OPTIONS

Parameter	Option Code
Frequency tolerance	
±20ppm	B
Qualification	
Any	
Commercial	
AEC-Q200 (Automotive)	A

SPECIFICATIONS

Frequencies (selectable)	32.768kHz down to 1Hz
Dimensions	3.2 x 1.5 x 0.8mm
Turnover temperature (T ₀)	+25°C ±5°C
Frequency / temp coefficient	-0.035ppm/°C ² ±10%
Operating temperature range	-40 to +85°C
Storage temperature range	-55 to +125°C
Supply voltage (V _{DD})	I ² C bus active 1.8 ~ 5.5V Time-keeping mode 0.9 ~ 5.5V
Supply current (during access)	18µA typ (f _{scl} =400kHz, V _{DD} =3V)
Supply current (time-keeping)	190/240nA typ/max (f _{scl} =0Hz, V _{DD} =3V)
Ageing	±3ppm max first year
Shock and vibration resistance	±5ppm, 5,000g, 0.3ms, ½ sine ±5ppm, 20g, 10.0 ~ 2,000Hz
Soldering condition	Reflow, 260°C, 20 sec max
Net mass	11.4mg

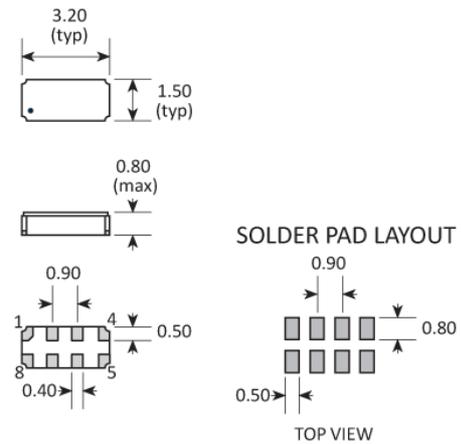PACKAGE DRAWING


PAD	CONNECTION	PAD	CONNECTION
1	Not connected	5	Supply voltage (VDD)
2	Ground and lid (VSS)	6	Frequency output (CLKOUT)
3	Clock output enable (CLKOE)	7	Serial clock input (SCL)
4	Interrupt output (INT)	8	Serial data (SDA)

Dimensions in mm

ORDERING INFORMATION

To request a quotation for the RV-8263-C7 please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

APPLICATIONS


The RV-8263-C7 real time clock is a versatile component suitable for a wide range of applications and uses including:

- Automotive
- Health Care
- IoT
- Industrial
- Metering
- Portable Devices
- Wearables

TECHNICAL RESOURCES

[RV-8263-C7_App-Manual.pdf](#)

TAPE & REEL SPECIFICATION

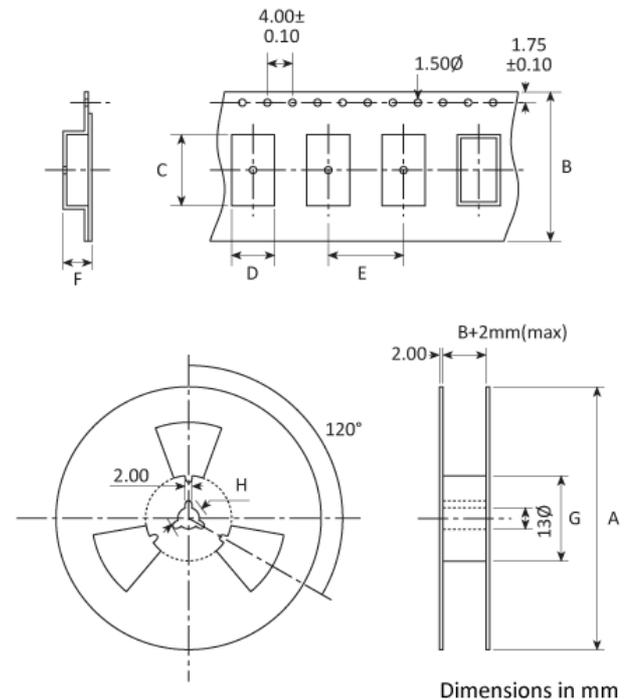

A:178* / B:12 / C:3.5 / D:1.8 / E:4 / F:1 / G:61 / H:21

*Larger reel size available. Please ask for details

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

COMPLIANCE



Lead-free (< 0.1% by weight)



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)

CONSTRUCTION

Ceramic package

Hermetically sealed with metal lid

Gold flashed pads

SUPPLY PARTNER



The RV-8263-C7 is manufactured by Micro Crystal and stocked and supplied by Golledge.

BLOCK DIAGRAM

