

SCOCXOHSW

3.3V OCXO Sine Output

- Excellent phase noise performance @ 100MHz
- -160dBc noise floor @ 10.0MHz
- Fundamental mode frequencies up to 120MHz
- Compact 14-pin DIL package (SMD optional)
- High shock and vibration resistance

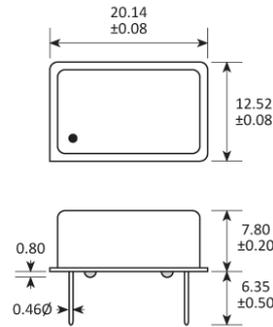


CONFIGURABLE OPTIONS



Parameter	Option Code
Frequency	
Temperature stability	
Any	
±0.075ppm max, 0 to +60°C	A
±0.050ppm max, 0 to +60°C	TA
±0.150ppm max, -20 to +70°C	B
±0.075ppm max, -20 to +70°C	TB
±0.250ppm max, -40 to +85°C	C
±0.100ppm max, -40 to +85°C	TC
Frequency adjustment (±2.5ppm min ≤ 40MHz, ±4.0ppm min > 40MHz)	
Any	
Control voltage 0V ~ 3.3V, pin 1	V
Variable resistor 0~10kΩ, pins 1 to 7	R
None (int accuracy ±1.0ppm)	A
None (int accuracy ±0.5ppm)	B
Package	
Through hole 14 pin DIL	
SMD option D1	D1
SMD option D2	D2

SPECIFICATIONS

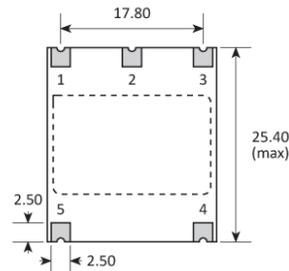
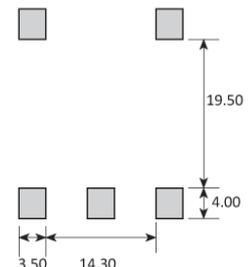

Frequency range	10.0 ~ 120MHz
Dimensions	20.1 x 12.5 x 8.0mm
Frequency stability	±0.3ppm max first year (≤40MHz) ±2.5ppm max in 10 years (≤40MHz) ±1.0ppm max first year (>40MHz) ±4.0ppm max in 10 years (>40MHz) ±0.1ppm max vs V _{DD} ±10ppb max vs load ±5%
Short term stability	1x10 ⁻¹⁰ max, t 0.1 to 30s 5x10 ⁻¹¹ typ at 1s
Storage temperature range	-55 to +125 °C
Output waveform	Sinewave 50Ω Harmonics -15dBc typ Spurii -70dBc max
Level	≥ 2dBm / 50Ω (≤20MHz) ≥ -6dBm / 50Ω (>20MHz)
Start up time	5ms max
Supply voltage (V _{DD})	+3.3V (±0.15V)
Input current	350mA max for up to 30s @ 25 °C during start up 120mA max @ +25 °C 170mA max @ -20 °C
Warm up time	120s to within ±0.1ppm @ 25 °C
Phase noise (dB typ @ 100MHz)	-90dBc/Hz @ 10Hz -120dBc/Hz @ 100Hz -140dBc/Hz @ 1kHz -150dBc/Hz @ 10kHz -155dBc/Hz @ 100kHz
Shock & vibration	5,000g, 0.3ms ½-sine 10.0 ~ 2,000Hz, 20g

PACKAGE DRAWING
Through-hole (DIL-14)


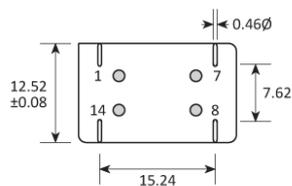
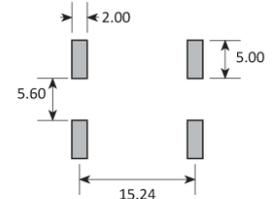
PIN	CONNECTION
1	Freq adjustment or Ground
7	Ground
8	Output
14	Supply


SMD Option D1 - mounted PCB


PAD	CONNECTION
1	Freq adjustment or Ground
2	Not connected
3	Supply
4	Output
5	Ground


SOLDER PAD LAYOUT

SMD Option D2 - formed leads


PIN	CONNECTION
1	Freq adjustment or Ground
7	Ground
8	Output
14	Supply


SOLDER PAD LAYOUT


Dimensions in mm

ORDERING INFORMATION

To request a quotation for the SCOCXOHSW please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

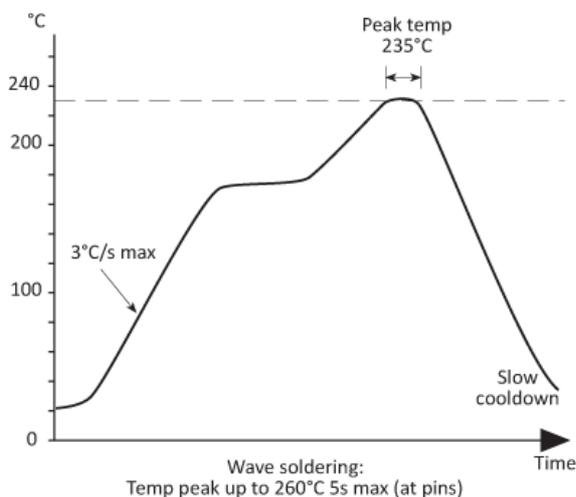
If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

APPLICATIONS

This SCOCXOHSW oven controlled oscillator is suitable for a wide range of applications including:

- Digital switching
- Telecom transmission
- SONET / SDH / DWDM / FDM/36 / WIMAX
- Airborne equipment
- Battery operated systems
- Instrumentation
- Radio transceivers

SOLDERING PROFILE



HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Resistance weld

COMPLIANCE



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)