

SCOCXOVS

5V Tight Stability OCXO with Sine Output




- Ultra high stability
- Compact 14-pin DIL package (SMD optional)
- 5.0V supply voltage
- Sinewave output
- Very fast warmup

CONFIGURABLE OPTIONS



Parameter	Option Code
Frequency	
Temperature stability	
Any	
±0.025ppm max, 0 to +60°C	A
±0.05ppm max, -20 to +70°C	B
±0.1ppm max, -40 to +85°C	C
Frequency adjustment (±2.5ppm min)	
Any	
±2.5ppm via control voltage 0.5~5.0V	V
±2.5ppm via variable resistor 0~10kΩ	R
None (int accuracy ±1.0ppm)	A
None (int accuracy ±0.5ppm)	B
Package	
Through hole 14 pin DIL	
SMD option 1	D1
SMD option 2	D2

SPECIFICATIONS




Frequency range	10.0kHz ~ 54.0MHz
Dimensions	20.1 x 12.5 x 8.0mm
Frequency stability	±0.3ppm max first year ±2.5ppm max in 10 years ±0.1ppm over $V_{DD} \pm 0.2V$ ±10ppb max vs load ±5%
Short term stability	1×10^{-10} , t 0.1 to 30s 5×10^{-11} typ at 1s
Storage temperature range	-55 to +125 °C
Output waveform	Sinewave from 50Ω Harmonics < -10dBc Spurii < -70dBc
Level	≥ 4dBm / 50Ω (≤20MHz) ≥ 0dBm / 50Ω (>20MHz)
Supply voltage (V_{DD})	+5.0V (±0.2V)
Input current	300mA max for up to 10s @ 25 °C during start up 80mA max @ +25 °C 110mA max @ -20 °C
Warm up time	60s to within ±0.1ppm @ 25 °C
Phase noise (typ @ 10MHz)	-110dBc/Hz @ 10Hz -135dBc/Hz @ 100Hz -145dBc/Hz @ 1kHz -150dBc/Hz @ 10kHz
Shock & vibration	5,000g, 0.3ms ½-sine 10.0 ~ 2,000Hz, 20g

PACKAGE DRAWING
Through-hole (DIL-14)




PIN	CONNECTION
1	Freq adjustment or Ground
7	Ground
8	Output
14	Supply


SMD Option D1 - mounted PCB


PAD	CONNECTION
1	Freq adjustment or Ground
2	Not connected
3	Supply
4	Output
5	Ground


SOLDER PAD LAYOUT

SMD Option D2 - formed leads


PIN	CONNECTION
1	Freq adjustment or Ground
7	Ground
8	Output
14	Supply


SOLDER PAD LAYOUT


Dimensions in mm

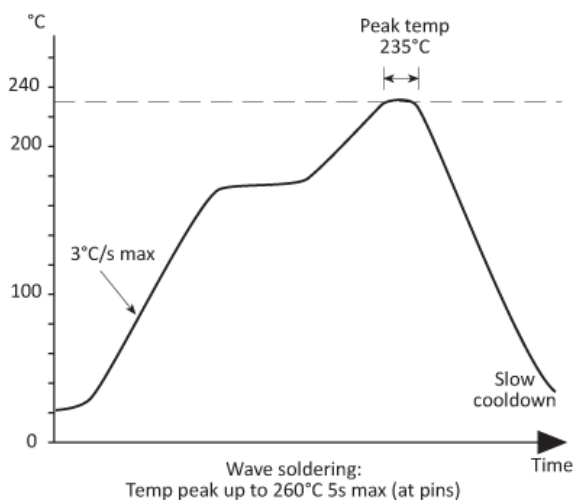
ORDERING INFORMATION

To request a quotation for the SCOCXOVS please use the configurable options form to choose the options you require and then submit your configured product to our team. Our expert advisers are always happy to help with your requirements and can be contacted on +44 1460 256 100 or at sales@golledge.com.

Following product selection you will be issued with a seven character Golledge part number. Your Golledge part number is the internationally accepted Golledge manufacturing part number (MPN) that should be used for all project documentation, including bills of materials (BoMs) and purchase orders.

If you have any queries regarding any of our documentation our dedicated sales team will be happy to help.

SOLDERING PROFILE



APPLICATIONS

This SCOCXOVS oven controlled oscillator is suitable for a wide range of applications including:

- Digital switching
- Telecom transmission
- SONET / SDH / DWDM / FDM/36 / WIMAX
- Airborne equipment
- Battery operated systems
- Instrumentation
- Radio transceivers

HANDLING & STORAGE



Human Body Model (HBM) 1A (250V to <500V)



Moisture Sensitivity Level (MSL): 1 (or not applicable)

CONSTRUCTION

Resistance weld

COMPLIANCE



RoHS compliant with no exemptions. [See our declaration](#)



REACH compliant. [See our statement](#)



Free of conflict minerals. [See our declaration](#)



Free of Halogens. [See our declaration](#)



Free of Ozone-depleting substances. [See our declaration](#)